

# Partial Corrective Action Plan Amendment 2:

Former Fellow Gear Shaper Property, 100 River  
Street, Springfield, Vermont, SMS #972235

January 20, 2026 (revised August 11, 2026)



PROJECT NO.

20231131

REVIEWED BY:

DGJ 120125

DTV 073126

PREPARED FOR:

Mark Ellenbogen / *Executive Director of  
Entitlements*

ICP Springfield SPE, LLC

550 W B St, 4th Floor

San Diego / CA / 92101

SUBMITTED BY:

David Jensen / *Project Manager*  
Stone Environmental, Inc.

535 Stone Cutters Way

Montpelier / VT 05602

[djensen@stone-env.com](mailto:djensen@stone-env.com)

802.318.7828

---

# Title and Approval Page

---

## Document Title

Partial Corrective Action Plan Amendment 2: Former Fellow Gear Shaper Property, 100 River Street, Springfield, Vermont, SMS #972235

January 20, 2026 (revised August 11, 2026)


## Document Prepared by:

Stone Environmental, Inc., 535 Stone Cutters Way, Montpelier, VT 05602 (802) 229-4541

## Document Preparer Approvals:

David Jensen, P.E. Project Engineer, Stone Environmental, Inc.

By my signature, as a Vermont Registered Engineer that I hereby certify that I have reviewed this document.



Signature

Digitally signed by David  
Jensen  
Date: 2026.08.12 10:36:03  
-04'00'

Date



Daniel Voisin, Senior Geologist, Stone Environmental, Inc.

I certify under penalty of perjury that I am an environmental professional and that all content contained within this deliverable is to the best of my knowledge true and correct.



Signature

Digitally signed by Daniel T.  
Voisin  
Date: 2026.08.12 10:47:37 -04'00'

Date

---

# Executive Summary

---

Stone Environmental, Inc. (Stone) has prepared this Partial Corrective Action Plan (CAP) Amendment for ICP Springfield SPE, LLC (ICP) for the former Fellows Gear Shaper facility located at 100 River Street in Springfield, Vermont (the Site). This document amends the CAP prepared by the Johnson Company, Inc. dated October 20, 2009, and the CAP Amendment prepared by Stone dated February 24, 2011 for the Site. A CAP amendment is necessary to meet the requirements of the updated Vermont Department of Environmental Conservation (VT DEC) Investigation and Remediation of Contaminated Properties Rule (IRule) issued in 2024, to capture additional analytical data collected in 2021, and to describe updates to the previously selected mitigation strategy. This Partial CAP Amendment has been prepared exclusively for the remediation of polychlorinated biphenyl (PCB)-contaminated building materials in the 100 River Street former main production facility; corrective actions to address other contaminants of concern in the main Site building as well as corrective action for the remainder of the Site will be detailed in a separate Partial CAP Amendment. This report has been revised to include receipt of the *Re-Issue and-PCB Risk-Based Disposal Approval under 40 CFR § 761.61(c), Former Fellows Gear Shaper Facility, Springfield, Vermont*, dated July 14, 2026.

The Site is an 8.75-acre parcel, situated in a mixed commercial and residential area in the Central Business District of the City of Springfield. The Site is bound to the northwest by the former Vermont Machine Tool Company (65 Pearl Street), a former machine manufacturing facility. The Black River defines the north and northeast property boundary, except for a narrow strip of land northeast of the Black River that is an asphalt parking lot serving Site patrons. A pedestrian footbridge spans the Black River from the main building to the parking lot. Pearl Street is located southwest of the Site with residences and a machine shop (Gear Works, Inc., 76 Pearl) further southwest. Additional residences and a vacant lot (5 Pearl Street) are southeast of the Site.

The property at 100 River Street consists of a former main production facility and four separate outbuildings. The former main production facility (the main building) measures approximately 255,000 square feet on two stories except for an office area, which is three stories. Most of the property not covered by the main building, is covered with asphalt which serves as parking for the main building. The four outbuildings associated with the property include the former Boiler House, the so-called “1898 House”, a sanitary sewer pump station owned and operated by the Town of Springfield, and a three-story former Fellows Gear Shaper workforce Cafeteria Building with an attached one-story garage. The third floor of the Cafeteria Building connects to the first floor of the main building by a catwalk that spans above one of the access drives.

The property was originally developed in 1836 and used as a sawmill, wooden doll factory, and carriage painting shop and was later developed as a paper mill by 1856. The property use was converted to machine manufacturing by the Fellows Gear Shaper Company who operated at the property from 1896 to 1983. The Jones and Lamson Company used a portion of these facilities to manufacture gun turrets during the World War II era. Prior to renovations and as recently as 2009, the 100 River Street property was primarily used for the storage of equipment, supplies, chemicals and/or documents.

---

Currently, the Office Area of the main building is occupied by the Springfield Medical Center and is used for medical offices. Tenants in other Site areas include the Visiting Nurses Association (VNA) and Vermont Adult Learning on the ground floor. Until recently, other lease spaces were occupied by Vermont Beer Shapers (a commercial brewery and tasting room in the northwest end of the main building), a pharmacy (first floor, off of the Great Hall), and a café (first floor northeast section of the main building).

PCBs are regulated by the United States Environmental Protection Agency (EPA) under 40 CFR Part 761, under the authority of EPA Toxic Substances Control Act (TSCA) Division. PCBs are present within building materials, concrete (porous media), and on non-porous surfaces and require remediation in accordance with TSCA regulations for the following reasons:

- PCBs are present at levels above 1.0 milligram per kilogram (mg/kg) in porous materials and above 10 micrograms per 100 square centimeters ( $\mu\text{g}/100\text{ cm}^2$ ) on non-porous surfaces,
- PCBs are presumed to have been released from a source or sources with unknown PCB concentrations, and
- PCBs may have, in part, been released after 1978.

To allow for occupation of the Site's main building, various remediation and mitigation activities have occurred since 2009, including: demolition of several portions of the building, capping of the floor and walls in several portions of the building, and installation of a sub-slab depressurization system in the Office Area. Remedial activities remain incomplete in Part E (ground level) and Parts NLD, J, and H (first floor), as well as long-term monitoring and operation and maintenance (O&M) of existing engineered solutions.

Planned corrective actions included in this Partial CAP Amendment as follows:

- Encapsulation of all PCB remediation waste at concentrations  $\geq 1.0\text{ mg/kg}$  in high occupancy areas.
- Draining of the northern loading dock elevator hydraulic fluids and sealing access to the elevator.
- Abandonment of the underground vault in the T2 transformer room, restricting access to the transformer room, and applying waterproof sealant to the foundation wall of the room.
- Abandonment of the former supply well in northern loading dock in accordance with the Vermont Water Supply Rule.

Periodic ongoing maintenance and monitoring of engineered barriers is imperative for proper function of the corrective actions to mitigate PCB exposure. Corrective action implementation is planned to begin in winter 2025/2026.



---

# Partial Corrective Action Plan Amendment 2: Former Fellow Gear Shaper Property, 100 River Street, Springfield, Vermont, SMS #972235

---

*Cover Photo:  
Northern façade of  
100 River Street  
Development. Stone  
Environmental,  
Inc., June 30, 2020*

## Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>Title and Approval Page.....</b>                               | <b>2</b>  |
| <b>Executive Summary.....</b>                                     | <b>3</b>  |
| <b>1. Introduction.....</b>                                       | <b>7</b>  |
| 1.1. Site Description.....                                        | 7         |
| 1.2. Site History.....                                            | 9         |
| 1.2.1. Former Occupants.....                                      | 9         |
| 1.3. Previous Environmental Investigations.....                   | 10        |
| 1.4. Redevelopment Plan.....                                      | 13        |
| <b>2. Conceptual Site Model.....</b>                              | <b>15</b> |
| 2.1. Topography.....                                              | 15        |
| 2.2. Geology.....                                                 | 15        |
| 2.2.1. Bedrock.....                                               | 15        |
| 2.2.2. Surficial Material.....                                    | 15        |
| 2.3. Hydrology and Hydrogeology.....                              | 15        |
| 2.4. Industrial Setting.....                                      | 16        |
| 2.5. Potential Release Mechanisms, Fate, and Transport.....       | 16        |
| 2.5.1. Polychlorinated Biphenyls (PCBs).....                      | 16        |
| 2.6. Contaminant Distribution.....                                | 17        |
| 2.7. Nearby Sensitive Receptors.....                              | 17        |
| 2.7.1. Drinking Water Supplies.....                               | 17        |
| 2.7.2. Surface Water and Groundwater Source Protection Areas..... | 17        |
| 2.7.3. Buildings with Basements.....                              | 18        |
| 2.7.4. Wetlands.....                                              | 18        |
| 2.7.5. Sensitive Ecological Areas.....                            | 18        |
| 2.7.6. Adjoining Property Owners.....                             | 18        |
| <b>3. Corrective Action Plan.....</b>                             | <b>20</b> |
| 3.1. Performance Standards.....                                   | 20        |
| 3.1.1. Relevant Regulatory Criteria.....                          | 20        |
| 3.1.2. Corrective Action Objectives.....                          | 21        |
| 3.2. Permits.....                                                 | 21        |
| 3.3. Redevelopment and Reuse.....                                 | 21        |
| 3.4. Remedial Construction Plan.....                              | 21        |
| 3.4.1. Epoxy Paint Encapsulation and Drywall Barrier.....         | 21        |
| 3.4.2. Concrete Barrier and Passive Vapor Barrier.....            | 22        |

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| 3.5. Site Feature Abandonment .....                                  | 22        |
| 3.5.1. Northern Loading Dock Elevator .....                          | 22        |
| 3.5.2. Transformer Room 2 (T2) Underground Vault .....               | 23        |
| 3.5.3. Former Supply Well .....                                      | 23        |
| 3.6. Waste Management .....                                          | 23        |
| 3.7. Quality Assurance/Quality Control .....                         | 24        |
| 3.7.1. Initial Post-Abatement Cleanup Verification .....             | 24        |
| 3.8. Institutional Control .....                                     | 25        |
| 3.9. Long-Term Monitoring and Operation & Maintenance .....          | 25        |
| 3.10. Health and Safety .....                                        | 25        |
| 3.11. Reporting .....                                                | 26        |
| 3.12. Schedule .....                                                 | 26        |
| 3.13. Proposed Contractors/Subcontractors .....                      | 26        |
| 3.14. Costs .....                                                    | 28        |
| <b>4. References .....</b>                                           | <b>29</b> |
| <b>Appendix A: Figures .....</b>                                     | <b>A</b>  |
| <b>Appendix B: TSCA Approval Letter Re-Issue .....</b>               | <b>B</b>  |
| <b>Appendix C: CAP Implementation Status Table .....</b>             | <b>C</b>  |
| <b>Appendix D: Data Tables .....</b>                                 | <b>D</b>  |
| <b>Appendix E: Stone Site-Specific Protocol SEI-102350.3.0 .....</b> | <b>E</b>  |
| <b>Appendix F: Health and Safety Plan .....</b>                      | <b>F</b>  |
| <b>Appendix G: Detailed Cost Estimate .....</b>                      | <b>G</b>  |

## Table of Figures

|                                                                |   |
|----------------------------------------------------------------|---|
| Figure 1: Location Map .....                                   | A |
| Figure 2: Vicinity Map .....                                   | A |
| Figure 3: Site Map .....                                       | A |
| Figure 4: Site Map – Ground Floor .....                        | A |
| Figure 5: Site Map – First Floor .....                         | A |
| Figure 6: Historic PCB Analytical Results – Ground Floor ..... | A |
| Figure 7: Historic PCB Analytical Results – First Floor .....  | A |
| Figure 8: 2021 SSI PCB Analytical Results – Ground Floor ..... | A |
| Figure 9: 2021 SSI PCB Analytical Results – First Floor .....  | A |

## Table of Tables

|                                                      |    |
|------------------------------------------------------|----|
| Table 1: Proposed Use by Area .....                  | 13 |
| Table 2: Sensitive Receptor Evaluation .....         | 17 |
| Table 3: Sensitive Ecological Areas .....            | 18 |
| Table 4: Adjoining Landowners .....                  | 18 |
| Table 5: Proposed Cleanup Verification Samples ..... | 25 |
| Table 6: Proposed Schedule .....                     | 26 |
| Table 7: Proposed Contractors .....                  | 27 |
| Table 8: Estimated Costs .....                       | 28 |

---

# 1. Introduction

---

Stone Environmental, Inc. (Stone) has prepared this Partial Corrective Action Plan (CAP) Amendment for ICP Springfield SPE, LLC (ICP) for the former Fellows Gear Shaper facility located at 100 River Street in Springfield, Vermont (the Site; Figure 1, Appendix A). Remedial actions are necessary at the Site to prevent risk of exposure to Site users through direct contact and inhalation of polychlorinated biphenyl (PCB) in porous and non-porous media. This document amends the 2009 CAP (Johnson Company, Inc. [JCO], 2009b) and the 2011 CAP Amendment (Stone, 2011) for the Site. A CAP amendment is necessary to meet the requirements of the updated Vermont Department of Environmental Conservation (VT DEC) Investigation and Remediation of Contaminated Properties Rule (IRule) issued in 2024, to capture additional PCB analytical data for building materials (paint, underlying masonry, and non-porous surfaces) collected in 2021 (Stone, 2025), and to report updates to the previously selected mitigation strategy. This amendment is administrative and minor as the mitigation strategy remains to separate contaminated building materials from the occupied space and perform confirmation and long-term monitoring to ensure efficacy. This report has been revised to include receipt of the *Re-Issue and-PCB Risk-Based Disposal Approval under 40 CFR § 761.61(c), Former Fellows Gear Shaper Facility, Springfield, Vermont*, dated July 14, 2026 (the Approval; Appendix B; EPA, 2026).

This Partial CAP Amendment has been prepared exclusively for the remediation of PCB-contaminated building materials in the 100 River Street former main production facility, hereafter referred to as the main building. Corrective actions to address other contaminants of concern in the main building, as well as corrective actions for the remainder of the Site, will be detailed in a separate Partial CAP Amendment.

The property was purchased in January 2025. The contact information for the current property owner is:

100 River Street Ventures, LLC  
Mark Ellenbogen, Partner-Entitlement and Development  
550 W. B Street, 4th Floor  
San Diego, CA, 92101

## 1.1. Site Description

The Site is centered approximately at 43.30140° north latitude and -72.48632° west longitude with elevations ranging between 445 to 439 feet above sea level in the Town of Springfield, Windsor County, Vermont (Figure 1, Appendix A). The Site is an 8.75-acre parcel located at 100 River Street and is identified with the City of Springfield as Parcel 23-1-25.

The Site is in a mixed commercial and residential area in the Central Business District of the Town of Springfield (Figure 2, Appendix A). The Site is bound to the northwest by the former Vermont Machine Tool Company (65 Pearl Street), a former machine manufacturing facility. The Black River defines the north and northeast property boundaries, except for a narrow strip of land northeast of the Black River that is an asphalt parking lot serving patrons of businesses within the Site building; River Street is immediately northeast of this auxiliary parking lot (Figure 3, Appendix A). A pedestrian footbridge spans the Black River from the main

---

building to the parking lot. Pearl Street is located southwest of the Site with residences and a machine shop (Gear Works, Inc., 76 Pearl) further southwest. Additional residences and a vacant lot (5 Pearl Street) are southeast of the Site.

The main building measures approximately 255,000 square feet on two stories except for a portion, hereafter referred to as the Office Area, which is three stories. The Office Area is occupied by the Springfield Health Center, operated by Springfield Medical Care Systems, and is used for medical offices. Tenants in other Site areas include the Visiting Nurses Association (VNA) and Vermont Adult Learning on the ground floor. Until recently, other lease spaces were occupied by Vermont Beer Shapers (a commercial brewery and tasting room in the northwest end of the main building), a pharmacy (first floor, off the Great Hall), and a café (first floor northeast section of the main building).

The bulk of the main building comprises two floors: Parts D and E on the ground floor at grade with the southeastern Site parking lot (Figure 4, Appendix A) and Parts C, F, G (the Great Hall), H, and J approximately at grade with Pearl Street (Figure 5, Appendix A). Slab-on-grade portions of the former manufacturing facility, specifically Part B and the Northern Loading Dock area, comprise the western portion of the manufacturing facility and are at grade with Pearl Street.

The table in Appendix C is modified from Stone's report titled *Site Status Report, 100 River Street, Springfield, VT*, dated July 2, 2014, to summarize the current status of remedial activities presented in the 100 River Street Corrective Action Plan (CAP; The Johnson Company, 2009b), subsequent amendment (Stone, 2011), and this amendment. It also provides a summary of ongoing monitoring requirements, as described within the August 2012 Monitoring and Maintenance Implementation Plan (MMIP), submitted by Stone to the US EPA Toxic Substances Control Act (TSCA) Division (Stone, 2012). The building layout and status of proposed remedial activities and ongoing monitoring requirements are also shown on Figures 4 and 5 (Appendix A).

Most of the property, not covered by the main building, is covered with asphalt which serves as parking for users of the main building. There are currently four outbuildings associated with the property (Figure 3, Appendix A): the former Boiler House (located within the lower parking lot on the east side of the property), the so-called "1898 House" (located immediately adjacent Pearl Street on the west side of the property), a sanitary sewer pump station (located in the southeast corner of the property) owned and operated by the Town of Springfield, and a three story former Fellows Gear Shaper workforce Cafeteria Building with attached one story garage (located along the southern property boundary). The third floor of the Cafeteria Building connects to the first floor of the main building by a catwalk that spans above one of the access drives.

Electric service is provided by pole-mounted lines located on Pearl Street. A pad-mounted electrical transformer is located near Part B adjacent to Pearl Street. An electrical room with dry transformers is located between Parts J and NLD. A hydroelectric turbine (Figure 3, Appendix A) powered by water diverted from the Black River provides net-metering to offset the property's electricity demand. The turbine is located northeast of Part J where a dam spans the Black River.

The property is serviced by municipal sanitary sewer that traverses the eastern portion of the property from north to south, following the former Opal Street and terminating at a pump station located at the southeast corner of the property. Manhole access points are located within Part E of the basement of the main plant. The property is also traversed by sanitary sewer lines from several residential connections along Pearl Street and from the 5 Pearl Street property located due south of the property.

The property formerly used two groundwater production wells. The first well was used for production water and is located within the building adjacent the northern loading dock. The second well supplied water for the 100 River Street boilers and was located southeast of the former Chip Shed. The second well was abandoned

---

by Stone in September 2010 to reduce the risk of the well serving as a migration pathway for contaminants within the overburden aquifer. The interior supply well is slated for abandonment during CAP activities.

Several previous reports for the Site indicated the presence of floor drains in the subject building and that one or more may potentially discharge to the Black River. With the onset of remedial actions, historical floor drains have been abandoned. A recently installed floor drain within the former Vermont Beer Shapers space was installed to capture overflow and process water from the brewery and discharges to the municipal sewer system. According to Mr. Ted Foster, building manager, roof drains discharge to the Black River.

## 1.2. Site History

The property was originally developed in 1836 and used as a sawmill, wooden doll factory, and carriage painting shop and was developed as a paper mill by 1856. The property use was converted to machine manufacturing by the Fellows Gear Shaper Company who operated at the property from 1896 to 1983. According to available plans for the property, the oldest building was constructed in 1898 along Pearl Street (i.e., the 1898 House).

Additional buildings were constructed at the property between the original structure and the Black River between 1899 and 1953. These buildings were first used to manufacture machines to fabricate gears. In its original configuration, the business utilized a canal that provided waterpower to the older incarnations of the manufacturing facility. A covered bridge spanned the Canal in the area south of the southern loading dock. Prior to 1948, the property was traversed by Opal Street, a now discontinued street that extended from the intersection of Pearl and Morgan Streets, passed under the plant, and beneath the Office Area. Street curb stones are still present and visible within the main building. The footbridge from River Street previously carried vehicles and horse carriage traffic, intersecting with Opal Street beneath the Office Area.

The Jones and Lamson Company used a portion of these facilities to manufacture gun turrets during the World War II era. Machining operations occurred at the property until Fellows Gear Shaper Company moved out of the complex in 1983.

The newest additions to the complex occurred in 1942 and 1953, which included buildings located along the Black River. These buildings were primarily used for office space.

### 1.2.1. Former Occupants

Prior to renovations and as recently as 2009, the 100 River Street property was primarily used for the storage of equipment, supplies, chemicals and/or documents. The following tenants were identified during the Site inspection of the 2008 Phase I ESA performed by URS and through a review of available local records:

- Matrix Chemical - Matrix Chemical operated a laboratory in approximately 1,200 square feet of the southeast portion of the building adjacent to the Black River. Drums of ethyl acetate and containers of amorphous boron and magnesium oxide addressed to Matrix Chemical were observed in the nearby loading dock. Access to Matrix Chemical was restricted and, therefore, this portion of the building could not be inspected in 2008. A company profile could not be obtained via a search of available records or the Internet.
- Profile Engineering - Profile Engineering performed specialized gear measuring services, operating from a small shop on the first floor of the main building. Profile Engineering measures gears and specializes in refurbishing, maintaining, and updating Fellows Gear Measuring equipment. Profile Engineering had occupied the building from approximately 1989 to 2009.
- Vermont Machine Tool - Vermont Machine Tool, formerly located at the adjoining 65 Pearl Street property, specialized in the remanufacturing, retrofitting, retooling, and modernizing of machine



---

tools. Vermont Machine Tool rented a large portion of the main building for storage of miscellaneous parts and equipment. Some of this equipment contained quantities of cutting oil stored in equipment reservoirs.

- Microcut Laser - Microcut Laser is a stone cutting company specializing in the production of marble countertops and marble etching.
- Dance Factory - A dance studio.
- Acrylic Designs - Manufacturers of acrylic signs and promotional materials for retail sales, marketing companies and restaurants.
- Adult Basic Education - A full service basic adult education center providing educational services, including general educational development (GED), adult diploma programs (ADP), English to speakers of other languages (ESOL), commercial driver's license (CDL), and basic computer instruction.
- VGHG Distribution Center - No information available.
- Northeast Rebuilders - A machine shop for the rebuilding and refurbishing machining tools and equipment cleaning and removal of cutting oils. Based on available records, kerosene was used for cleaning parts.
- Lincoln Street, Inc. - A non-profit to support individuals with developmental disabilities.
- Nevis Imaging Systems - No information available.
- Alpine Screen Works - A screen printing company. No further information was available.

### 1.3. Previous Environmental Investigations

The following section details prior environmental investigations that are germane to PCB-contaminated and PCB-containing building materials in the 100 River Street main building. Historical data is shown on Figures 6 and 7 (Appendix A), 2021 SSI data is shown on Figures 8 and 9, and all data is provided in tabular format in Appendix D.

Dufresne-Henry completed a Phase I ESA in 1999. The Phase I ESA identified multiple RECs, which included the use of hazardous materials and 48 abandoned transformers that tested positive for PCBs (Dufresne-Henry, 1999). Hazardous materials included fuel oil, kerosene, solvents, glues, PVC dyes, solvent-based dyes, lubricating oil, cutting oil, welding gases, and fuel oil additives. Some spillage was observed and was described as minor. Floor staining was observed in the vicinity of a parts washer on the lowest level of the building. Some portions of the Site were not accessible to Dufresne-Henry, including the area on the lower level occupied by a chemical manufacturer.

The US EPA and Roy F. Weston (Weston) Superfund Technical Assessment and Response Team performed a Preliminary Assessment/Site Investigation in October and November 1999. During the limited investigation, the EPA and Weston collected 19 soil samples near the transformers located outside of the buildings. An inventory of the transformers was performed, identifying 26 transformers inside the building and 22 located outdoors. The memo describes the transformers as “unsound” and documents oil staining around a number of transformers. In 2001, Loueriro Engineering Associates (Loueriro) supervised the removal of PCB-containing transformers and related switch gear from the Site.

JCO performed an updated Phase I ESA in 2005. This Phase I ESA revealed no additional conditions indicative of releases or threatened releases of hazardous materials or RECs beyond those identified in the prior Phase I ESA Update conducted by Marin, with the exception of the paint in the former electrical room. The epoxy paint applied as a protective barrier from PCB impacted concrete and soil appeared to be cracking, peeling, and no longer functional for its intended purpose (JCO, 2005).

---

An additional Phase III was subsequently conducted by JCO in 2006. During the site investigation, soil samples were collected from six locations below the slab of the T2 operational transfer room, located in the northern portion of the main building. All samples from T2 were submitted for laboratory analysis with results indicating no PCBs detected in any of the soil samples. It was therefore concluded that PCBs were not a concern in soils below the transformer rooms. An underground concrete vault containing approximately 1,100 gallons of water (8 feet long, 4.4 feet wide, with water 4 feet deep) was discovered in T2. The report documented the presence of two small ports on the tank, with no piping attached. The water inside the tank was not reported to be used in the building for any purpose. A water sample collected from the vault was found to contain 1.1 micrograms per liter ( $\mu\text{g/L}$ ) of total PCBs.

URS Corporation (URS) completed a PCB sampling program in 2008 to assist in preparation of a CAP. The samples collected included 15 wipe samples from the floor of the T2 electrical room. All wipe sampling results were below the wipe sampling criterion of 10 micrograms/100 square centimeters ( $\mu\text{g}/100\text{ cm}^2$ ) except one (T2-Wipe-05, located in the center of the southern end of the room), which contained  $63.5\text{ }\mu\text{g}/100\text{ cm}^2$  of PCBs.

A Phase I ESA was completed by URS in 2009. This Phase I ESA identified the following RECs: PCBs, hazardous materials, former and existing electrical rooms, an underground vault, a chip shed, a coolant tank and sump, a boiler room, VOC- and chlorinated VOC- impacted groundwater, asbestos-containing building materials, and lead-based paint (URS, 2009).

JCO performed an SSI between August and December of 2008 to further characterize PCB contamination on the Site for the purpose of developing a CAP. The 2008 effort included initial sampling in August for PCBs in the historical Machine Shops #2 (upper and lower level, Parts F and D, respectively) and #4 (Part E), the Chip Shed, soils around the Chip Shed, sediment in a dry well near the Chip Shed, transformer pads, water and sludge inside the cutting oil recycling tank, and groundwater downgradient of the Chip Shed. Following receipt of the analytical results, the investigation was expanded to encompass the entire main building (at various sample spacing) in October. In total, several hundred concrete samples were collected (JCO, 2009b).

In May 2009, JCO prepared a post-abatement sampling plan for a PCB Risk-Based Cleanup Plan (RBCP) in the northwestern portion of the 100 River Street building. This letter report detailed the methodology, number and frequency of remedial cleanup and ongoing monitoring sampling and analysis within Part B of the site building (JCO, 2009a). This was followed by a Corrective Action Feasibility Investigation (CAFI) and Corrective Action Plan (JCO, 2009b) for remedial activities at 100 River Street. Remedial activities relevant to the PCB-contaminated building materials in the main building included:

- Implementation of a RBCP for concrete in the main building.
- Removal of the outdoor transformer pad and adjacent soils.
- Cleanup of the underground vault in transformer room.
- Cleanup of the cutting oil recycling tank.
- Removal of waste drums from the building.
- Establishment and implementation of long-term maintenance schedules for PCBs in the main building.

Stone completed a Phase I ESA of the Subject Property in 2010. This Phase I identified the following RECs:

- Past use of 100 River Street as a machine manufacturing facility that included the following specific processes:
  - Use of PCB-contaminated machining oils.

- 
- Storage of machining “chips” within an exterior Chip Shed where machining fluids drained to soil.
  - Use of chlorinated solvents as degreasing agents.
  - Operation of loading docks in the southern and northern areas.
  - Use of ten (10) out of service USTs for various chemicals and fuels.
  - Onsite storage of virgin and waste machine oils, chlorinated solvents, and ketones.
  - Documented contamination in building materials and soil by PCBs.
  - Documented contamination in soil, soil gas, and groundwater by chlorinated solvents include PCE, TCE, and associated breakdown products.
  - Past use of 100 River Street for chemical storage (Matrix Chemical).
  - Occurrence of approximately ten (10) hazardous waste containers and approximately 3,000 PCB-contaminated fluorescent light ballasts on 100 River Street.
  - Location of 100 River Street adjacent to known RCRA generators with documented violations.
  - Location of 100 River Street downgradient of potential sources of chlorinated solvents, including a dry cleaner and other machine shops, and PCB contamination.

Remedial activities were initiated following the approval of the PCB RBCP from the EPA TSCA Division for concrete in the main Site building. A summary of the current status of proposed remedial activities is included as Appendix C.

Stone conducted long-term monitoring activities in 2017, which included assessment of impacts from PCBs in building materials within the main building. Specifically, indoor air was monitored for PCBs and no action levels were exceeded. Protective barriers, which include concrete and epoxy paint, were properly mitigating direct exposure to PCBs as well as aiding in the reduction of PCBs in indoor air. Indoor air PCB concentrations in Room 1 (0.12  $\mu\text{g/L}$ ) exceeded the occupied room action level, however, the room was unoccupied and undergoing remedial actions and renovations at the time of sampling (Stone, 2017).

Stone conducted Phase I ESAs on August 3, 2020, and February 5, 2025, as part of environmental due diligence on behalf of ICP (formerly Heartland Group) and ICP Springfield SPE, LLC, respectively, in anticipation of purchasing the Site.

In 2021, Stone conducted a Site Investigation, which included an evaluation of whether PCBs are present in paint and substrate in portions of the Site building that have not undergone redevelopment. Based on the findings of the SSI, Stone made the following conclusions relevant to PCBs in building materials:

- PCBs Bulk Products are present as various building material within the northern basement and northern loading dock areas of the main building.
  - Paint on walls within the investigated area contain PCB Bulk Product (EPA Toxic Substances Control Act (TSCA) Division bulk product criteria of 50 milligrams per kilogram [mg/Kg]).
  - PCBs in bulk product paint have diffused into underlying masonry and exceed the TSCA high occupancy walkway criteria of 1 mg/Kg where PCBs in paint are the highest (i.e., beige-grey paint on the first floor with PCB concentrations of 198 mg/Kg).
  - Dust or oil-residue present on the paint in some of the investigated area is PCB-contaminated likely from prior machining operations, but at concentrations below the applicable cleanup level.
  - Non-porous surfaces associated with the northern loading dock elevator contain PCBs that exceed the EPA TSCA division walkway criteria due to former use of PCB-containing lubricating oil.

- The electrical conduit previously identified within the former Part A machine room (currently the upper parking lot) is potentially present within the northern end of the Site building according to historical drawings.

## 1.4. Redevelopment Plan

ICP Springfield SPE, LLC intends to redevelop the Site as part of a greater redevelopment project centered at 100 River Street. Planned improvements include creating self-storage units in the basement and unspecified commercial leases in the remaining upper floor. Table 1 summarizes the proposed use of the various rooms in the 2010 CAP and 2011 CAP Amendment. This CAP Amendment does not propose any changes to the redevelopment. Ancillary improvements will include installation of new HVAC and bathrooms.

*Table 1: Proposed Use by Area*

| Area     | Description                                                     | PCB Contamination                                                     | CAP Proposed Use                                          | Amendment 1 Proposed Use                                                       | Amendment 2 Proposed Use             |
|----------|-----------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------|--------------------------------------|
| Part A   | Upper level, western side of main building                      | 0.51 to 5.4 mg/Kg in concrete<br>720 mg/Kg in conduit sludge          | To be demolished and redeveloped as parking               | No change                                                                      | No change                            |
| Part B   | Upper level, large rooms on east side                           | 0.65 to 41 mg/kg in concrete                                          | Industrial                                                | No change                                                                      | No change                            |
| Part C   | Upper level, northeastern corner                                | Non-detectable to 48.1 mg/Kg in concrete                              | Commercial                                                | Restaurant or commercial                                                       | No change                            |
| Part D/F | Former Machine Shop #2 Southernmost 25 feet of Machine Shop #2. | Non-detectable to 33 mg/Kg                                            | Parking                                                   | Parking and partial demolition.                                                | No change                            |
| Part E   | Lower level, former Machine Shop #4 Transformer room T2         | Non-detectable to 21 mg/Kg<br>54 to 136 mg/kg in paint                | Undetermined Commercial/Industrial<br>T2 to remain in use | Mini storage and offices<br>T2 will be closed and sealed<br>New elevator shaft | No change                            |
| Part G   | Great Hall                                                      | 1.6 to 8.2 mg/Kg in concrete                                          | Hallway/ Meeting Space                                    | No change                                                                      | HVAC improvements to be installed    |
| Part H   | Upper level, small rooms next to Great Hall                     | 1.2 to 20 mg/kg in concrete                                           | Commercial                                                | No change                                                                      | Commercial Bathrooms to be installed |
| Part J   | Upper level, northern side                                      | 0.91 to 12 mg/Kg                                                      | Commercial/ Industrial                                    | No change                                                                      | No change                            |
| Part LMN | Upper level, small rooms on east side                           | 0.86 to 11 mg/Kg                                                      | Commercial                                                | Springfield Hospital Health Clinic and Offices                                 | No change                            |
| Part NLD | Upper level, northern loading dock                              | Non-detectable to 2.9 mg/Kg in concrete<br>18.5 to 198 mg/kg in paint | Industrial, Supply well to remain in use                  | Industrial, Supply well to be abandoned                                        | No change                            |
| Part O/P | Upper level, wooden floor storage area                          | 4.3 to 6.0 mg/Kg                                                      | Demolished for Access Drive                               | To be demolished to allow for Handicap Parking                                 | No change                            |

---

| Area        | Description        | PCB Contamination      | CAP Proposed Use | Amendment 1 Proposed Use              | Amendment 2 Proposed Use |
|-------------|--------------------|------------------------|------------------|---------------------------------------|--------------------------|
| Part Office | Former office area | Non-detectable to 0.83 | Health Clinic    | Health Clinic with structural changes | No change                |

---

---

## 2. Conceptual Site Model

---

The following Conceptual Site Model (CSM) provides a set of working hypotheses that describe key aspects of the Site primarily as they pertain to the potential exposure from PCB-impacted building materials in the main building. The CSM includes a discussion of the physical, geologic, and hydraulic attributes of the Site and surrounding area, how chemicals were released at the Site, their transport pathways, fate mechanisms, and potential routes of exposure to ecological and human receptors. The CSM provides the context from which the site investigation is developed and a framework to make sound Site management decisions.

### 2.1. Topography

The Site is situated approximately 489 feet above mean seal level. The Site slopes from its southwestern border (Pearl Street) down to the northeastern border (the Black River). The top of the bank is approximately 10 feet above the Black River in the northeast corner of the Site's lower parking lot.

### 2.2. Geology

#### 2.2.1. Bedrock

According to the Bedrock Geologic Map of Vermont (Ratcliffe, et al., 2011), bedrock below the Site is mapped as phyllite and metalimestone, which is described as dark-gray to silvery-gray, lustrous, carbonaceous muscovite-biotite-quartzite phyllite containing abundant beds of punky-brown-weathering, dark-bluish-grey micaceous quartz-rich limestone in beds ranging from 10 centimeters to 10 meters thick. Bedrock outcrops were observed in the Black River immediately east of the Site during Stone's Phase I ESA inspection on January 27, 2025 and were consistent with the description above. The dip of bedding appears to be near vertical.

#### 2.2.2. Surficial Material

According to the Surficial Geologic Map of Vermont (Doll, Ed., 1970), native unconsolidated soils at the Site are primarily mapped as post glacial fluvial deposits composed of fluvial sand and gravel. The southeastern portion of the 100 River Street property under the footprint of the main building is mapped as a glaciolacustrine deposit consisting of pebbly sand. These deposits resulted from inundation of the region following the last glacial maximum when the region was flooded by Glacial Lake Hitchcock. Native soils are expected to be reworked with fill as the Site was developed.

Site investigations at the Site documented dense glacial till encountered at depths ranging between 5 and 15 feet below ground surface (Marin, 2001b). During monitoring well installation in 2017, Stone reported soil in the upper 12 feet to consist of silty sand and gravel before transitioning to dense glacial till (Stone, 2017).

### 2.3. Hydrology and Hydrogeology

The Black River abuts the Site to the north and northeast and generally flows northwest to southeast. Groundwater at the 100 River Street property has been measured at depths between 6 to 10 feet below grade in the eastern portion of the Site and flows northeasterly toward the Black River at a gradient of 0.05 feet per foot



---

(Stone, 2017). Groundwater on 5 Pearl Street was found to flow in a northeastern direction by Harper (2010). Groundwater at the adjoining property to the southwest, 76 Pearl Street, was found to be flowing north towards the Black River. Based on these observations, we surmise that flow within the unconsolidated aquifer is largely controlled by the presence and gauge height of the Black River. Groundwater is expected to flow generally to the northeast towards the Black River. In portions of the Site where retaining walls are present, shallow groundwater flow to the Black River is likely hindered. In other areas, such as where buried utility lines are present, we expect that flow may be affected; these utilities and their backfill may act as preferential pathways for groundwater and/or soil gas movement at the Site.

## 2.4. Industrial Setting

The Site was utilized for machine manufacturing for much of the last century. Known releases have occurred at the Site, including cutting fluids and coolants containing PCBs and chlorinated solvents including PCE and TCE, among others.

## 2.5. Potential Release Mechanisms, Fate, and Transport

A CSM for the Site was described in the 2009 CAP (JCO, 2009) and portions updated in the 2017 long-term monitoring report (Stone, 2017). The following description focuses on PCB impacts to building materials at the Site.

### 2.5.1. Polychlorinated Biphenyls (PCBs)

PCBs are a group of structurally similar, man-made chemicals that were manufactured in the United States from 1929 until 1979, after which time manufacturing was banned. During this time, PCBs were used in coolants and lubricants in transformers, capacitors, and other electrical equipment or machinery, hydraulic fluids, as well as in cutting oils for machining operations. Spills of PCB-containing cutting oil have occurred at the Site, resulting in contamination of concrete slabs. PCB contamination can be spread throughout buildings by foot traffic. For example, a worker standing on a contaminated area of slab near a machine base would likely get cutting oil on their work boots and track these oils to the bathroom, breakroom, office, or other areas of the building. Concrete slabs in the main building have been historically assessed with exceedances of the 1 mg/Kg walkaway standard observed across much of the building except for the Office Area. Exceedances of the 10 mg/Kg high occupancy cap standard are intermittently present in the machine shop areas and transformer rooms throughout the building with certain portions of these areas also exceeding the 25 mg/Kg low occupancy no cap standard.

The elevator components in the northern loading dock area were assessed for PCB-containing oil during Stone's SSI and found to be impacted, suggesting that lubricating oil used on the mechanical components historically contained PCBs. The observed concentrations of PCBs are unlikely to cause a significant impact to indoor air; however, the equipment should be decontaminated or properly disposed during future redevelopment activities.

Though PCBs have a low volatility, contaminated building materials can volatilize PCBs and potentially impact indoor air. Barriers including concrete and epoxy paint can be and have been installed over contaminated building materials in occupied portions of the main building to prevent direct contact and limit volatilization of PCBs from impacted materials. However, some PCB-contaminated building materials, which include concrete floor, brick walls, and parts of the ceiling, remain in unoccupied areas of the main building. Near term remedial efforts will include installation of concrete barriers and epoxy paint in areas where none exist, and maintenance of those in poor condition.

Data from 2017 long-term monitoring indicate that PCB barriers including epoxy paint and concrete caps are effectively mitigating exposure, including direct contact and inhalation, to PCB contamination. Indoor air monitoring has not been completed since 2017 and to continue to mitigate the risk of exposure, protective barriers will need to be monitored to ensure their proper integrity.

PCBs were additionally analyzed and not detected in two sub-slab soil samples in Part B and the northern loading dock area. While limited in spatial distribution, the two samples suggest that there is not widespread PCB-impacted fill immediately below this portion of the building. Current plans for the Part B and NLD areas are to retain the existing building for storage and possibly commercial tenants.

## 2.6. Contaminant Distribution

Contamination at the Site has been evaluated for its potential to adversely affect sensitive receptors. Table 2, below, presents the potentially affected media, pathways, and receptors for PCB contamination in building materials at the 100 River Street main building. Other contaminants of concerns and other areas of the Site will be addressed in subsequent partial CAPs.

*Table 2: Sensitive Receptor Evaluation*

| Potentially Affected Media | Potential Pathways                                                                                                     | Potential Sensitive Receptors                           | Potential Level of Risk                                                                                                                                                                                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Indoor Air                 | Impact to indoor air from volatilization of PCB-containing building materials in the building.                         | Building occupants and visitors<br>Construction workers | Low – PCB concentrations in indoor air during 2017 monitoring were below the action level in all rooms where corrective actions had been performed except Room 1. Corrective actions, including installation of engineered barriers in unoccupied rooms, will limit potential impacts from off-gassing to future users of those spaces.                  |
| Building Materials         | Direct contact PCB impacted walls and slabs.<br>Volatilization of PCBs from impacted building materials to indoor air. | Building occupants and visitors<br>Construction workers | Low – PCBs have been detected in concrete, masonry, and non-porous media at concentrations exceeding the applicable standards. Under current conditions, there is no exposure to occupants. Corrective actions, including installation of engineered barriers, will prevent direct contact and limit potential impacts from off-gassing to future users. |

## 2.7. Nearby Sensitive Receptors

Using the Vermont Agency of Natural Resources (ANR) Natural Resources Atlas, a qualitative receptor analysis was completed to evaluate the occurrence of potential receptors relative to the Site.

### 2.7.1. Drinking Water Supplies

There are no public and twenty-four private drinking water supplies within 0.5-miles of the Site. Private drinking water supplies are depicted on Figure 2.

### 2.7.2. Surface Water and Groundwater Source Protection Areas

There are no surface water or groundwater source protection areas within 0.5 miles of the Site.

### 2.7.3. Buildings with Basements

Data regarding the presence of buildings with basements on adjoining properties is not readily available. We expect that residences nearby the Site have basements.

### 2.7.4. Wetlands

According to the ANR Natural Resources Atlas, there is one mapped Class II wetland within 0.5 mile of the Site, which includes the Black River corridor as it passes the Site (Figure 2).

### 2.7.5. Sensitive Ecological Areas

Sensitive ecological areas, including deer wintering yards (1), habitat blocks (3), significant natural communities (0), VT Fish and Wildlife managed lands (0), rare, threatened, or endangered species (0), uncommon species (0), and Indiana Bat hibernacula (0) were assessed within 0.5 mile of the Site using the ANR Natural Resources Atlas. Results are summarized in Table 3.

*Table 3: Sensitive Ecological Areas*

| Resource ID | Resource Type       | Size (acres) |
|-------------|---------------------|--------------|
| DWA844      | Deer Wintering Area | 115          |
| 3352        | Habitat Block       | 1,911        |
| 3354        | Habitat Block       | 863          |
| 3453        | Habitat Block       | 5,831        |

### 2.7.6. Adjoining Property Owners

Property owners adjoining the Site are summarized in Table 4, below, and will be notified of proposed corrective actions in accordance with § 35-607(b)(1) of the IRule.

*Table 4: Adjoining Landowners*

| E911 Property Address | Parcel ID | Direction from Site | Owner                                | Contact Information                     |
|-----------------------|-----------|---------------------|--------------------------------------|-----------------------------------------|
| 5 PEARL ST            | 26-2-26   | SOUTHEAST           | ON THE RIVER LLC                     | 434 4TH ST NE<br>WASHINGTON DC 20002    |
| 31 PEARL ST           | 26-2-21   | SOUTHEAST           | SPRINGFIELD<br>HOUSING AUTHORITY     | 80 MAIN STREET<br>SPRINGFIELD VT 05156  |
| 35 PEARL ST           | 26-2-20   | SOUTHEAST           | FERNWOOD LANE LLC                    | 58 TOWNWOODS RD OLD<br>LYME CT 06371    |
| 36 PEARL ST           | 26-2-7    | SOUTHWEST           | RHODES DENITA                        | 40 PEARL ST SPRINGFIELD VT<br>05156     |
| 40 PEARL ST           | 26-2-6    | SOUTHWEST           | RHODES KIM D<br>RHODES DENITA A      | 40 PEARL STREET<br>SPRINGFIELD VT 05156 |
| 42 PEARL ST           | 26-2-4    | SOUTHWEST           | CROTEAU DOUGLAS J<br>CROTEAU THERESA | 42 PEARL STREET<br>SPRINGFIELD VT 05156 |
| 48 PEARL ST           | 26-2-3    | SOUTHWEST           | OLNEY BERTIE E                       | 48 PEARL STREET<br>SPRINGFIELD VT 05156 |
| 52 PEARL ST           | 26-2-2    | SOUTHWEST           | WRIGHT TARA JUDITH                   | 52 PEARL ST SPRINGFIELD VT<br>05156     |

| <b>E911 Property Address</b> | <b>Parcel ID</b> | <b>Direction from Site</b> | <b>Owner</b>                        | <b>Contact Information</b>                      |
|------------------------------|------------------|----------------------------|-------------------------------------|-------------------------------------------------|
| 56 PEARL ST                  | 26-2-1           | SOUTHWEST                  | AUGUSTINOWICZ<br>PATRICIA           | 56 PEARL STREET<br>SPRINGFIELD VT 05156         |
| 65 PEARL ST                  | 23-1-26          | NORTHWEST                  | MONTY-MACK LLC                      | 100 RIDGE RD ARDSLEY NY<br>10502                |
| 76 PEARL ST                  | 23-1-24          | WEST                       | PU TRADE<br>ASSOCIATES LLC          | 76 PEARL STREET<br>SPRINGFIELD VT 05156         |
| 12 RIVER ST                  | 26-2-39          | SOUTHEAST                  | FACTORY FALLS INC                   | 286 SOUTH STREET,<br>SPRINGFIELD, VT 05156      |
| 43 RIVER ST                  | 26-2-40          | SOUTHEAST                  | 43 RIVER STREET LLC                 | 43 RIVER STREET SUITE 2<br>SPRINGFIELD VT 05156 |
| 47 RIVER ST                  | 23-2-80          | SOUTHEAST                  | MCBRIDE ROBERT A                    | PO BOX 831 BELLOWS FALLS<br>VT 05101            |
| 57 RIVER ST                  | 23-2-72          | SOUTHEAST                  | TOLSTOI PROPERTIES<br>LLC           | PO BOX 195 CHESTER VT<br>05143                  |
| 67 RIVER ST                  | 23-2-71          | SOUTHEAST                  | SORBA FRANCOIS X<br>SORBA BARBARA A | 10 OAK SPRING DR SAN<br>ANSELMO CA 94960        |
| 69 RIVER ST                  | 23-2-64          | EAST                       | SORBA FRANCOIS X<br>SORBA BARBARA A | 10 OAK SPRING DR SAN<br>ANSELMO CA 94960        |

---

## 3. Corrective Action Plan

---

This section describes the recommended design elements for management of PCB-contaminated building materials and PCB-containing fluids. Corrective actions have been completed to date in accordance with the 2009 CAP (JCO, 2009b). Completed and remaining corrective actions by room are presented in the table in Appendix C and Figures 4 & 5 (Appendix A). The following sections detail recommended design elements for remaining corrective actions required to address exposure from PCB-impacted building materials in the main building. Corrective actions for other contaminants of concern and in other areas of the Site will be addressed in a subsequent Partial CAP Amendment.

Corrective actions will be performed by contractors under the supervision of a Qualified Environmental professional (QEP). This cleanup plan has been prepared as a CAP in accordance with the Vermont IRule. Disturbance of contaminated materials shall not commence until approval of this CAP by the VT DEC.

### 3.1. Performance Standards

Corrective action objectives described within this CAP are designed to mitigate exposure known Site contaminants through inhalation and direct contact with PCB-contaminated building materials and PCB-containing fluids.

#### 3.1.1. Relevant Regulatory Criteria

PCBs are regulated by the EPA under 40 CFR Part 761, under the authority of EPA TSCA Division. PCBs are present within building materials including porous media (i.e., concrete) and on non-porous surfaces (i.e., steel columns) and require cleanup in accordance with TSCA regulations for the following reasons:

- PCBs are present at levels above 1.0 mg/kg in porous materials and above 10 µg/100 cm<sup>2</sup> on non-porous surfaces,
- PCBs are presumed to have been released from a source or sources with unknown PCB concentrations, and
- PCBs may have, in part, been released after 1978.

PCB analytical results from previous environmental investigations were compared to the following regulatory criteria:

- Concrete: TSCA cleanup levels regulated by the United States Environmental protection Agency (EPA) under 40 CFR Part 761. Section 761.61(a) of the CFR outlines the following cleanup levels of porous media at PCB contaminated sites:
  - High Occupancy, no cap: less than or equal to ( $\leq$ ) 1.0 mg/kg
  - High Occupancy, with cap: greater than ( $>$ ) 1.0 mg/kg, but  $\leq$  10 mg/kg
  - Low Occupancy, no cap:  $\leq$  25 mg/kg
  - Low Occupancy, no cap, with signage indicating the presence of PCBs:  $>$  25 mg/kg, but  $\leq$  50 mg/kg.
  - Low Occupancy, with cap:  $>$  25 mg/kg, but  $\leq$  100 mg/kg

- 
- Wipe Samples: TSCA cleanup levels for non-porous surfaces include:
    - $\leq 10 \mu\text{g}/100 \text{ cm}^2$  for high occupancy use
    - $\leq 100 \mu\text{g}/100 \text{ cm}^2$  for low occupancy use

Proposed PCB initial post-abatement sampling results will be compared to the following site specific standards described in the Approval, Attachment 1, Item 13(a) (EPA, 2026):

- Air Samples: Initial post-abatement sampling requirements:
  - $\leq 0.03 \mu\text{g}/\text{m}^3$
- Wipe Samples: Initial post-abatement sampling requirements:
  - $< 1 \mu\text{g}/100 \text{ cm}^2$

### 3.1.2. Corrective Action Objectives

Corrective actions must achieve the following corrective action objectives:

- Encapsulation of all PCB remediation waste at concentrations  $\geq 1.0 \text{ mg/kg}$  in high occupancy areas.
- Draining of the northern loading dock elevator hydraulic fluids and sealing access to the elevator.
- Abandonment of the underground vault in the T2 transformer room, restricting access to the transformer room, and applying waterproof sealant to the foundation wall of the room.
- Abandonment of the former supply well in northern loading dock in accordance with the Vermont Water Supply Rule.

## 3.2. Permits

The following permits are required for the implementation of the CAP:

- Approved special waste profile from disposal facility
- Building permits may be required for some elements of the CAP.

## 3.3. Redevelopment and Reuse

The current Site redevelopment plan is described in Table 1 in Section 1.4 and is unchanged from the 2011 CAP Amendment (Stone, 2011).

## 3.4. Remedial Construction Plan

The basis of design for engineered barriers is to eliminate the potential for human contact and inhalation of PCB-contaminated building materials. The following engineered barriers will be constructed:

- Epoxy paint encapsulation
- Drywall and caulking barrier over poly sheeting
- Concrete barriers overlying poly sheeting

### 3.4.1. Epoxy Paint Encapsulation and Drywall Barrier

A combination of epoxy paint encapsulation and drywall physical barriers will be applied to the walls and steel columns in rooms where remediation has not already been completed. Rooms requiring additional remedial action include: a portion of Part E (Room E1), C, H (Rooms H1, H2, and H3), J, and NLD totaling around 25,000 ft<sup>2</sup> (Figure 4 & 5, Appendix A). The drywall barrier design will tend to be installed over large wide-open walls and the epoxy paint encapsulation will be installed where drywall barrier construction is challenging, such as around windows. Additionally, the contractor may consider impacts of the mitigation

---

design to potential future use of the space when selecting which to use. The final location of drywall barrier versus epoxy paint encapsulation will be recorded in the field and documented in the completion report.

Prior to installation of either barrier, if a concrete cap has already been installed it will be covered with overlapping polyethylene sheeting to prevent cross-contamination. If epoxy paint is being applied, the walls will be scraped of free and flaking paint and cleaned to remove surface grime. It is assumed, unless documented otherwise, that paint is lead-based and will be removed in accordance with the Vermont Lead Law. Walls will then be primed and painted with two contrasting colors of epoxy-based paint.

Where the drywall barrier is to be installed over walls or columns, large flakes of paint may be removed, however, the walls do not need to be made entirely stable as with the epoxy paint. The drywall barrier will be constructed to fully encase the impacted walls and columns, as relevant, using a steel stud frame and 1/2-inch-thick gypsum drywall board. A minimum 6-mil poly sheeting shall be installed behind the drywall. An airtight seal shall be made between the masonry wall and the interior space by sealing the vapor barrier to the floor, ceiling, masonry wall, or metal flashing that is itself sealed to one of these surfaces. The drywall will be finished with spackle, primed, and latex paint.

All tools and equipment within the work area shall be decontaminated before removal from the work area. Following removal of paint and containment materials, the work area will be decontaminated by vacuuming (with a high-efficiency particulate absorbing [HEPA] filter), wet wiping/mopping and a repeated vacuuming (with a HEPA filter) of the entire work area. All surfaces in and around the work area must be free of dust/particles generated during the work. The QEP will visually inspect the work area to determine if additional decontamination is required. After any decontamination is considered complete, the QEP will collect wipe samples from the slab if necessary (Section 3.7.1). If necessary, decontamination steps and wipe sampling will be repeated for the entire work area until PCBs are not detected in any of the wipe samples at concentrations exceeding  $10 \mu\text{g}/100 \text{ cm}^2$ .

#### **3.4.2. Concrete Barrier and Passive Vapor Barrier**

A 4-inch-thick concrete barrier, consisting of 3,500 PSI reinforced concrete will be installed in Parts H (Rooms H1, H2, and H3), J, and NLD over a total of approximately 34,000 ft<sup>2</sup> and will be underlain by a polyethylene vapor barrier. The basis of design for the passive vapor barrier is to mitigate exposure to PCBs via inhalation. The passive vapor barrier will consist of a minimum of 6-mil polyethylene sheet laid over the existing concrete slab prior to pouring of the new slab. Where more than one piece of vapor barrier is required, sheets will overlap by a minimum of 6-inches and be sealed with a vapor barrier tape.

All penetrations through the existing PCB-contaminated slab will be performed in accordance with Stone Site Specific Protocol (SSP) SEI-102350.3.0 (*Procedure for Cutting Concrete and Masonry at 100 River Street in Springfield, Vermont*), provided in Appendix E. Expansion joints will be placed at the direction of the architect and sealed with caulk. Wipes samples will be collected from concrete as described in Section 3.7.1.

### **3.5. Site Feature Abandonment**

#### **3.5.1. Northern Loading Dock Elevator**

To mitigate direct contact risk with the northern loading dock elevator's mechanical components, and lubricating fluids, the elevator gearbox and other associated vessels containing free liquids will be drained into DOT-approved containers and disposed of as PCB liquid waste. Prior to drainage, a minimum 6-mil polyethylene sheeting will be placed below the work area to contain any spilled liquids. After the removal of the bulk oil, the access to the elevator shaft and mechanical room will be sealed on the ground and first floor



---

using concrete masonry blocks and/or covered with the vapor barrier and drywall physical barrier described in Section 3.4.1.

### **3.5.2. Transformer Room 2 (T2) Underground Vault**

The T2 underground vault will be pumped dry and any liquids contained in 350-gallon totes or 55-gallon drums. The approximately 1,100-gallon vault will then be filled with concrete and any additional displaced water, collected and contained. Following filling of the vault, water sealant will be applied inside T2 along the northern, foundation wall to reduce the groundwater seepage into the room. The wall will be prepared according to the water sealant manufacturer's direction. The room will then be sealed from future use by walling off the eastern double-door access using concrete masonry blocks or installing a vapor barrier and drywall physical barrier and installing a lockable man door on the southern single door. Continued emergency access to the transformer room is necessary due to active electrical lines that transverse a portion of the room. Liquids contained from the vault will be characterized prior to subsequent disposal by EPA Method 8082 with manual Soxhlet extraction. One sample will be collected for each matrix present (liquids and/or sludge).

### **3.5.3. Former Supply Well**

Closure of the former supply well in the northern loading dock shall be completed by a Vermont licensed well driller in accordance with the Vermont Water Supply Rule. The well pump will be removed and the associated piping scrapped. The borehole will then be tremie grouted with a Portland cement grout. If the well pump cannot be removed, the well cap will be removed from the base of the well materials and the borehole tremie grouted. Displaced groundwater will be discharged to the ground surface to reinfiltrate. Previous analytical testing of water from the bedrock supply well has shown that it was not impacted above the Vermont Groundwater Enforcement Standard and concentrations are several orders of magnitude below those observed in overburden groundwater (JCO, 2009b); therefore, reinfiltration will not exacerbate the existing plume. The surface around the well and its vault will be repaired to meet CAP vapor barrier and concrete specifications.

## **3.6. Waste Management**

Waste will be contained in DOT-approved containers and transported off-Site for disposal as follows:

- Liquids, including tool and equipment decontamination liquids and free liquids from elevator mechanical components, will be disposed of as PCB liquid waste in accordance with 40 CFR §761.60(a).
- Disposable solids, such as personal protective equipment (PPE), rags, painting utensils, and polyethylene sheeting, generated during the PCB cleanup and disposal activities will be disposed of as PCB remediation waste corresponding to the bulk PCB remediation waste from which it was generated.
- Paint fragments from paint stabilization and liquids/sludge from the T2 vault will be contained, characterized, and disposed of according to analytical results as liquid PCB waste or bulk PCB remediation waste.

Bulk PCB remediation waste removed from the Site will be transported to the disposal facilities in accordance with 40 CFR §761.61(a)(5)(i). For bulk waste containing PCBs at concentrations greater than 50 mg/Kg, the disposal facility will be approved in accordance with 40 CFR Part §761.75 such as US Ecology's landfill in Wayne, Michigan. For bulk waste containing PCBs at concentrations less than 50 mg/Kg, the disposal facility will be a Subtitle D landfill permitted to receive PCB remediation waste, such as Cassella's Landfill in Coventry, Vermont.

---

### 3.7. Quality Assurance/Quality Control

Sample collection and data management activities will be performed in accordance with Stone's Standard Operation Procedures (SOPs) which are available upon request:

- SEI-4.2.8: Chain of Custody Procedures
- SEI-4.5.13: Conduct of Data Handling for GLP Studies
- SEI-5.1.7: Decontamination of Field Equipment
- SEI-5.34.6 Installation, Development, and Decommissioning of Monitoring Wells and Observation Wells
- SEI-5.41.4: Handling, Collection and Transportation of Samples
- SEI-5.99.0: Procedure for Wipe Sample Collection to Assess PCB Concentrations on Material Surfaces
- SOP 5.100.0: Determination of Polychlorinated Biphenyls in Ambient Air Using Low Volume Polyurethane Foam (PUF) Sampling

In addition, penetrations to concrete will be performed in accordance with Stone's SSP, provided as Appendix E:

- SSP SEI-102350.3.0: Procedure for Cutting Concrete and Masonry at 100 River Street in Springfield, Vermont

#### 3.7.1. Initial Post-Abatement Cleanup Verification

Following completion of remedial activities, initial post-abatement cleanup verification wipe sampling will be conducted of the concrete engineered barrier surfaces in accordance with 40 CFR §761.61 Subpart P. Wipe samples will be collected from within 100 cm<sup>2</sup> areas using laboratory prepared hexane wipes. A total of 11 wipe confirmation samples will be collected (Table 5; Figure 4 & 5, Appendix A). Field duplicate samples will be collected at a 5% frequency (1 in 20).

Sampling devices will be decontaminated between sample locations using a phosphate-free detergent scrub, isopropyl alcohol rinse, and clean water triple rinse. At least one equipment blank will be collected for each day cleanup verification sampling is conducted by wiping decontaminated sampling equipment surfaces with a laboratory-provided hexane wipe. Wipe samples will be submitted to a NELAP-accredited laboratory for analysis of PCB Aroclors by EPA Method 8082 with manual Soxhlet extraction.

Post-abatement indoor air samples will also be collected to confirm that remedial activities are effectively mitigating off-gassing of PCBs to indoor air in rooms with new engineered barriers. Laboratory provided PUF cartridges will be secured to continuous flow sample pumps calibrated to a flow rate of approximately 1 to 5 liters per minute and sampled over a 24-hour period. Based on this flow rate, laboratory reporting limits will be less than 10 nanograms per cubic meter (ng/m<sup>3</sup>). Five indoor air samples, one on the ground level and five on the first floor, plus one field duplicate, one field blank, and one exterior ambient air sample, will be collected (Table 5). The ambient air sample will be collected from a location up wind of the Site. Stone will submit samples to a NELAP-accredited laboratory under chain-of-custody procedures for analysis of PCBs by EPA Method TO-10A.

**Table 5: Proposed Cleanup Verification Samples**

| Description                 | Media      | Number of Samples | Quality Control Samples | Analysis     | Minimum Laboratory Reporting Limit | Site Specific Action Limit (Total PCBs) |
|-----------------------------|------------|-------------------|-------------------------|--------------|------------------------------------|-----------------------------------------|
| Engineered Barrier Surfaces | Wipe       | 11                | 1 FD<br>1 EB            | 8082 w/3540C | 0.50 $\mu\text{g}/100\text{ cm}^2$ | 1 $\mu\text{g}/100\text{ cm}^2$         |
| Confirmatory Air            | Indoor Air | 6                 | 1 FD<br>1 FB<br>1 AA    | TO-10A       | 0.01 $\mu\text{g}/\text{m}^3$      | 0.03 $\mu\text{g}/\text{m}^3$           |

Note: Site Specific Action Limits established in Attachment 1, Item 13 of the Approval (EPA, 2026).

### 3.8. Institutional Control

As a Vermont Brownfields Reuse and Environmental Liability Limitation Act (BRELLA) participant, the enrollee will receive a Certificate of Completion (COC) upon substantial completion of all corrective actions for the property including those described in this partial CAP amendment. The COC will serve as the institutional control and will be recorded in the Town of Springfield, Vermont Land Record for the 100 River Street property. Institutional control elements from this CAP that will be included in the COC following completion of all Site remediation will, at a minimum, require that:

- The Site owner submit a certification to the VT DEC that the COC has been recorded on the Site Property deed,
- A legal description of the site property,
- A brief description of the release of hazardous materials,
- A brief description of the corrective actions that were implemented on the property,
- The location of contamination that remains on-Site,
- The vapor barrier and engineered barriers constructed in accordance with this CAP be routinely inspected and maintained in perpetuity in such a manner to prevent exposure risk to Site users,
- Failed vapor barrier and engineered barriers be repaired promptly (within 30 days) under the supervision of personnel trained in accordance with the requirements of the OSHA HAZWOPER regulations (20 CFR 191.120),
- VT DEC be notified prior to any future Site development that could potentially disturb contaminated media or affect the operation of the remedial systems.

Within one week of receipt, the Site owner is responsible for recording the COC in the Town of Springfield Land Records and providing the VT DEC with proof that the COC was filed, including the land record book and page number.

### 3.9. Long-Term Monitoring and Operation & Maintenance

Long-term monitoring and operations and Maintenance (O&M) activities are required to ensure the continued effectiveness of the passive vapor and engineered barriers, and to monitor indoor air for PCBs. Monitoring and O&M requirements have been detailed in Stone's 2012 *Long-Term Monitoring and Maintenance Implementation Plan (MMIP) for Risk-Based PCB Cleanup* (Stone, 2012). The MMIP will be revised upon completion of corrective actions.

### 3.10. Health and Safety

Due to the presence of contamination at the Site, cleanup activities should be performed using appropriate health and safety precautions. Contractors selected for cleanup activities shall perform those services under the

auspices of their own site-specific health and safety plan, to be developed for the project. The contractors must make their own determinations as to the appropriate level of health and safety protection required for each of the activities described in this plan.

A Site-Specific Health and Safety Plan for QEP activities, waste characterization, and cleanup verification sampling is provided in Appendix F.

### 3.11. Reporting

Following completion of cleanup activities, a Partial Corrective Action Construction Completion Report (CACCR) will be prepared in accordance with §35-608 of the IRule and submitted to the VT DEC Brownfield Response Program Project Manager and EPA Region I PCB Coordinator. The completion report will include a description of Site activities including dates of work, field notes, figures, a discussion and tables of cleanup verification sample results, and recommendations for additional remedial activities, if necessary.

Operation and Maintenance (O&M) reports for the passive vapor and engineered barriers shall be submitted to VT DEC by October 1 of each year. Annual monitoring reports shall be prepared in accordance with the IRule and detail the annual long-term monitoring that occurred as well as any recommendations for changes to future O&M activities.

### 3.12. Schedule

Upon approval of the CAP, the proposed schedule for completion of the corrective action plan is provided in Table 6, below. The presented schedule is subject to change based on input by selected contractors and resource and funding availability.

*Table 6: Proposed Schedule*

| Task                                | Responsible Party               | Duration | Anticipated Start Date | Anticipated Completion Date |
|-------------------------------------|---------------------------------|----------|------------------------|-----------------------------|
| CAP Review                          | VTDEC                           | 6 weeks  | January 2026           | February 2026               |
| Final CAP                           | Stone, VT DEC                   | 1 week   | July 2026              | July 2026                   |
| Public Comment Period               | VTDEC, BRELLA Enrollee          | 30 days  | August 2026            | September 2026              |
| Funding Procurement                 | BRELLA Enrollee                 | 4 weeks  | July 2026              | October 2026                |
| Contractor Procurement              | BRELLA Enrollee                 | 6 weeks  | October 2026           | November 2026               |
| Contracting                         | BRELLA Enrollee, Contractor TBD | 2 weeks  | November 2026          | December 2026               |
| CAP Implementation                  | Stone, Contractor TBD           | 6 months | January 2027           | June 2027                   |
| Verification Sampling               | Stone, Contractor TBD           | 1 month  | May 2027               | June 2027                   |
| Corrective Action Completion Report | Stone                           | 2 months | July 2027              | September 2027              |
| O&M                                 | Stone, Contractor TBD           | 2 months | May 2027               | June 2027                   |

### 3.13. Proposed Contractors/Subcontractors

Contractors selected to perform cleanup activities will be procured under a competitive bid process by the owner. Potential contractors include, but are not limited to, the contractors summarized in Table 7, below.

**Table 7: Proposed Contractors**

| Address                                                                                       | Contact          | Title                                         | Phone        | Email                                                                                    |
|-----------------------------------------------------------------------------------------------|------------------|-----------------------------------------------|--------------|------------------------------------------------------------------------------------------|
| <b>Corrective Action Planning, Oversight, Cleanup Verification, Monitoring, and Reporting</b> |                  |                                               |              |                                                                                          |
| Stone Environmental, Inc.<br>535 Stone Cutters Way<br>Montpelier, VT 05602                    | David Jensen     | Project Engineer                              | 802-318-7828 | <a href="mailto:djensen@stone-env.com">djensen@stone-env.com</a>                         |
| <b>Well Abandonment</b>                                                                       |                  |                                               |              |                                                                                          |
| Cushing & Sons Water Well<br>and Systems<br>631 Rt. 12N<br>Keene, NH 03431                    | Bart C. Cushing  | Project Manager                               | 603-352-8866 | --                                                                                       |
| Platform Environmental<br>Drilling and Remediation<br>Services                                | Michael Jordan   | Owner                                         | 802-498-3828 | <a href="mailto:mjordan@platform-env.com">mjordan@platform-env.com</a>                   |
| <b>NELAP-Accredited Laboratory</b>                                                            |                  |                                               |              |                                                                                          |
| Eurofins Environment<br>Testing<br>64 Camp Avenue<br>North Kingstown, RI 02852                | Mara Ploch       | Regional Acct<br>Manager                      | 203-767-9894 | <a href="mailto:mara.ploch@et.eurofinsus.com">mara.ploch@et.eurofinsus.com</a>           |
| Pace Analytical<br>39 Spruce Street<br>East Longmeadow, MA<br>01028                           | James Georgantas | Account Executive                             | 413-525-2332 | <a href="mailto:jgeorgantas@pacelabs.com">jgeorgantas@pacelabs.com</a>                   |
| Phoenix Environmental<br>Laboratory<br>587 East Middle Turnpike<br>Manchester, CT 06040       | Bobbi Aloisa     | Vice President/Director<br>of Client Services | 860-645-8728 | <a href="mailto:bobbi@phoenixlabs.com">bobbi@phoenixlabs.com</a>                         |
| <b>Remediation Derived Waste Management</b>                                                   |                  |                                               |              |                                                                                          |
| Republic Services<br>280 Commerce Street<br>Williston, VT 05495                               | John Welch       | Project Manager                               | 802-338-8400 | <a href="mailto:jwelch2@republicservices.com">jwelch2@republicservices.com</a>           |
| Casella Waste Systems<br>184 Small Road<br>Barrington NH 03825                                | Scott Sampson    | Landfill Sales &<br>Marketing Manager         | 603-235-3597 | <a href="mailto:Scott.Sampson@casella.com">Scott.Sampson@casella.com</a>                 |
| Brighter Horizons<br>Environmental Corp.<br>201 West Main Street<br>Ayer, MA 01432            | Jennifer Laramie | Strategic Account<br>Manager                  | 978-970-0500 | <a href="mailto:jlaramie@bhenv.com">jlaramie@bhenv.com</a>                               |
| <b>Concrete Engineered Barrier Installer</b>                                                  |                  |                                               |              |                                                                                          |
| Carroll Concrete<br>368 Springfield Rd<br>Charlestown, NH 03603                               | Wes Carter       | Plant Manager                                 | 603-826-4444 | <a href="mailto:info@carrollconcrete.us">info@carrollconcrete.us</a>                     |
| S&S Concrete Floors<br>167 Davis Village Rd.<br>New Ipswich, NH 03071                         | TBD              | TBD                                           | 603-878-3311 | TBD                                                                                      |
| <b>Epoxy Paint Barrier Installer</b>                                                          |                  |                                               |              |                                                                                          |
| Vermont Protective Coatings<br>2598 Franklin St.<br>Brandon, VT 05733                         | Kirk Thomas      | Owner                                         | 802-247-3237 | <a href="mailto:ktthomas@vtprotectivecoatings.com">ktthomas@vtprotectivecoatings.com</a> |

| Address                                                                    | Contact           | Title           | Phone        | Email                                                                |
|----------------------------------------------------------------------------|-------------------|-----------------|--------------|----------------------------------------------------------------------|
| Associated Concrete Coatings LLC<br>476 Valley St.<br>Manchester, NH 03103 | Thomas Hall       | President       | 603-669-2780 | <a href="mailto:sales@concoat.com">sales@concoat.com</a>             |
| Area Man Construction, LLC                                                 | Nathan Rutherford | Project Manager | 813-970-5403 | <a href="mailto:Nrutherford03@gmail.com">Nrutherford03@gmail.com</a> |
| <b>Vapor Barrier and Drywall Physical Barrier Installer</b>                |                   |                 |              |                                                                      |
| Area Man Construction, LLC                                                 | Nathan Rutherford | Project Manager | 813-970-5403 | <a href="mailto:Nrutherford03@gmail.com">Nrutherford03@gmail.com</a> |

### 3.14. Costs

The estimated remedial costs are summarized in Table 8, below, and are based on professional experience, recent contractor quotes, and recent inflationary-related cost increases. Tasks costs are rounded to the nearest \$10. A detailed cost estimate is provided as Appendix G. A 20% contingency has been included to account for variations in contractor bids and unforeseen circumstances. Rates and contractor costs are subject to change if CAP implementation timing is delayed or redevelopment is completed piecemeal.

*Table 8: Estimated Costs*

| Task                                                                                 | Professional Services <sup>1</sup> | Consultant <sup>1</sup> | Expenses <sup>1</sup> | Total       |
|--------------------------------------------------------------------------------------|------------------------------------|-------------------------|-----------------------|-------------|
| 1 - Project Management & Coordination                                                | \$18,160                           | \$0                     | \$0                   | \$18,160    |
| 2 - CAP Implementation - Concrete & Epoxy Paint                                      | \$6,810                            | \$879,180               | \$970                 | \$886,960   |
| 3 - CAP Implementation - CAP Implementation - NLD Elevator, NLD Well, and T2 Closure | \$5,450                            | \$177,020               | \$780                 | \$183,240   |
| 4 - CAP Implementation - Initial Post Abatement Sampling                             | \$7,950                            | \$2,130                 | \$990                 | \$11,070    |
| 5 - Partial CACCR and MMIP Update                                                    | \$10,250                           | \$0                     | \$0                   | \$10,250    |
| 6 - Annual Monitoring (PCB in Bldg Materials) – 1 year <sup>2</sup>                  | \$7,380                            | \$1,720                 | \$1,010               | \$10,110    |
| <b>TOTAL</b>                                                                         |                                    |                         |                       | \$1,119,790 |
| <b>20% Contingency</b>                                                               |                                    |                         |                       | \$223,960   |
| <b>TOTAL with 20% Contingency</b>                                                    |                                    |                         |                       | \$1,343,750 |

Notes:

1 – Task costs are rounded to the nearest \$10.

2 – Monitoring costs assume complete occupancy of the building. A reduced long-term monitoring may be acceptable if rooms are vacant and will be described in the updated MMIP. VT DEC and EPA TSCA will be notified of any delays.

---

## 4. References

---

- Chace, J. *Map of Windsor County, Vermont*. [Troy: J. Chace, Jr, 1856] Map.  
<https://www.loc.gov/item/2012586224/>
- Dufresne-Henry, 1999, *Phase I Environmental Site Assessment*. February 1999.
- Environmental Protection Agency (EPA), 2026. *Re-Issue and-PCB Risk-Based Disposal Approval Under 40 CFM § 761.61(c). Former Fellows Gear Shaper Facility, Springfield, Vermont*. July 14.
- Griffin, 2002, *Phase III Environmental Site Assessment*. May 2002.
- Harper, 2010, Site Investigation, *DeRosia Property, 5 Pearl Street, Springfield, Vermont, SMS Site #WMD129*, November 19, 2020.
- JCO, 2005, *Phase I Environmental Site Assessment Update*. September 2005.
- JCO, 2006a, *Underground Petroleum Storage Tank Closure*. January 20, 2006.
- JCO, 2006b, *Additional Phase III Environmental Site Assessment*. May 2006.
- JCO, 2009a, *Post Abatement Sampling Plan for Risk-Based PCB Cleanup, Northwestern Portion*. May 27, 2009.
- JCO, 2009b, *Corrective Action Plan for Remediation of Soil and Groundwater Contamination*. October 20, 2009.
- Loureiro, 2001, *Completion of Work Report/ Interim Removal Action*. May 2001.
- Marin, 2001a, *Phase I Environmental Site Assessment Update*. June 2001.
- Marin, 2001b, *Phase II Environmental Site Assessment*. October 2001.
- Ratcliffe, N.M., Stanley, R.S., Gale, M.H., Thompson, P.J., and Walsh, G.J., 2011, *Bedrock Geologic Map of Vermont*, U.S. Geological Survey Scientific Investigations Map 3184, 3 sheets, scale 1:100,000.
- Stone, 2010, *Phase I Environmental Site Assessment, Former Fellows Gear Shapers, SMS #972235*. November 23.
- Stone, 2011, *Corrective Action Plan Amendment for Remediation of Soil and Building Material Contamination, SMS #97-2235, Former Fellows Gear Shaper Property, 100 River Street, Springfield, Vermont*, February 24, 2011.
- Stone, 2012, *Long-Term Monitoring and Maintenance Implementation Plan (MMIP) for Risk-Based PCB Cleanup, SMS# 99-2235 (sic), Former Fellows Gear Shaper, 100 River Street, Springfield, Vermont*, August 16, 2012.
- Stone, 2014. *Site Status Report, 100 River Street, Springfield, VT*, July 24.
- Stone, 2017. *2017 Annual Monitoring Report at the Former Fellows Gear Shaper, 100 River Street, Springfield, Vermont*. October 27.



---

Stone, 2020, *Phase I Environmental Site Assessment – 100 River Street, Springfield, Vermont*, August 3, 2020.

Stone, 2025, *Supplemental Site Investigation: 100 River Street, Springfield, Vermont, SMS #972235*, June 9.

Surficial Geologic Map of Vermont, 1970, Stewart and MacClintock, Doll, ed. Digital Data (VT Open Geodata Portal).

URS, 2009. *Phase I Environmental Site Assessment Report*. March 20, 2009.

---

# Appendix A: Figures

---

*Figure 1: Location Map*

*Figure 2: Vicinity Map*

*Figure 3: Site Map*

*Figure 4: Site Map – Ground Floor*


*Figure 5: Site Map – First Floor*

*Figure 6: Historic PCB Analytical Results – Ground Floor*

*Figure 7: Historic PCB Analytical Results – First Floor*


*Figure 8: 2021 SSI PCB Analytical Results – Ground Floor*

*Figure 9: 2021 SSI PCB Analytical Results – First Floor*

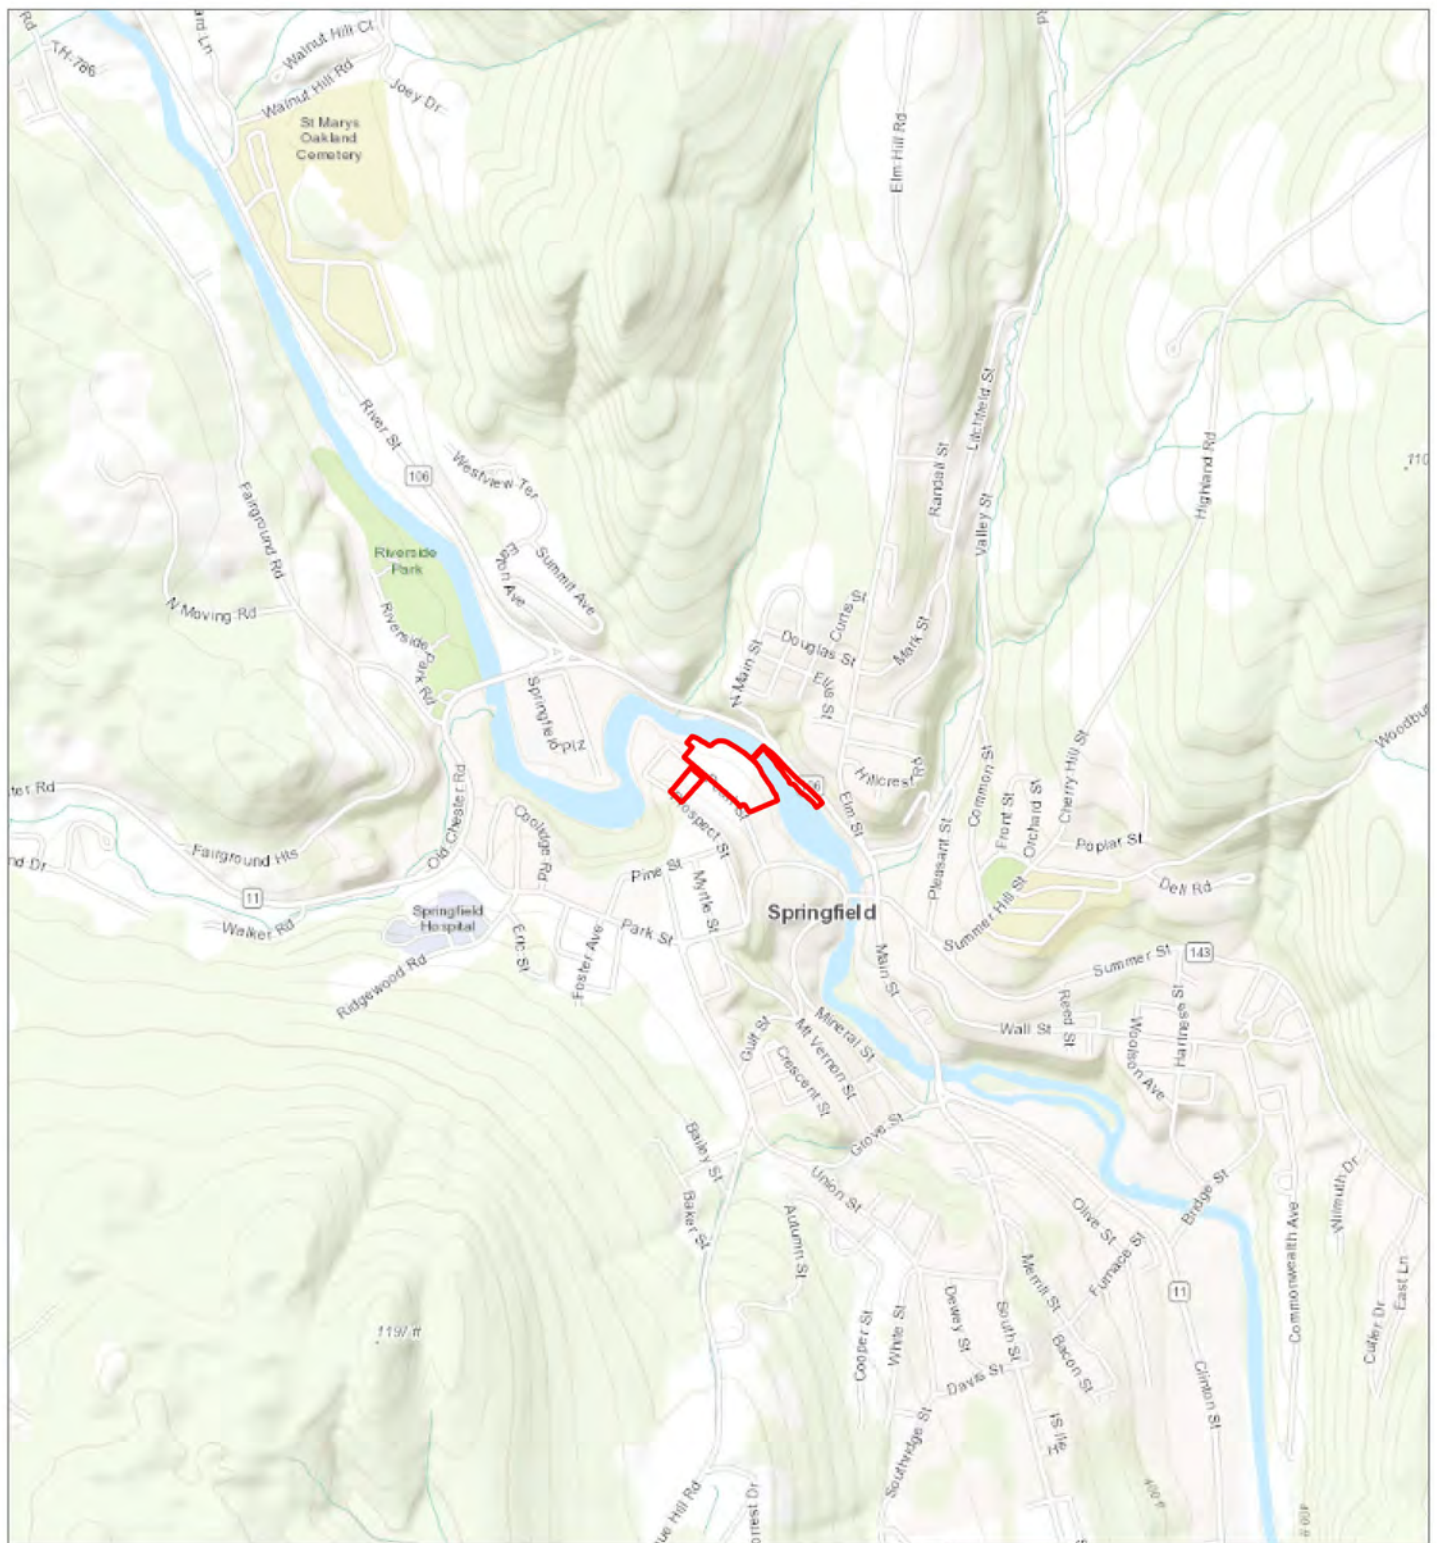

## LEGEND

Site Boundary



## Figure 1: Location Map

100 River Street  
Springfield, Vermont

Prepared for ICP Springfield SPE,  
LLC



STONE ENVIRONMENTAL






Source: Esri World Imagery, VCGI, ANR Atlas

## LEGEND

- |                                       |                                    |
|---------------------------------------|------------------------------------|
| Parcel Boundaries                     | VT Significant Wetlands Inventory  |
| 100 River Street Site Boundary        | Underground Storage Tank (working) |
| Private Wells                         | Hazardous Waste Site               |
| screen digitized                      | Hazardous Waste Generators         |
| E911 Address                          | Dry Cleaner                        |
| Habitat Blocks and Wildlife Corridors | VT Significant Wetlands Inventory  |
| 6                                     |                                    |
| 4                                     |                                    |



## Figure 2: Vicinity Map

100 River Street  
Springfield, Vermont

Prepared for ICP Springfield SPE,  
LLC

STONE ENVIRONMENTAL





LEGEND

- 100 RIVER ST PARCEL BOUNDARY
- PARCEL BOUNDARY
- FLOOR BUILDING LAYOUT
- PARKING LOT
- SITE FEATURES
- STRUCTURAL COLUMN

File: O:\PROJ-19\EAR\P19-124 Heartland 100 River Street\Data\AutoCAD\19-124\_COMBINED.dwg

| DRAWING CREDITS       | REVISIONS | # | DATE | DRWN | CHK'D | APP'D | DESCRIPTION |
|-----------------------|-----------|---|------|------|-------|-------|-------------|
|                       |           |   |      |      |       |       |             |
|                       |           |   |      |      |       |       |             |
|                       |           |   |      |      |       |       |             |
|                       |           |   |      |      |       |       |             |
|                       |           |   |      |      |       |       |             |
| DRAWN ON: 1/30/2025   |           |   |      |      |       |       |             |
| DRAWN BY: LBR         |           |   |      |      |       |       |             |
| CHECKED ON: 1/30/2025 |           |   |      |      |       |       |             |
| CHECKED BY: DTV       |           |   |      |      |       |       |             |
| PROJECT NO: 19-124    |           |   |      |      |       |       |             |



STONE ENVIRONMENTAL


535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com


SITE MAP  
100 RIVER STREET  
ICP SPRINGFIELD SPE, LLC  
SPRINGFIELD VERMONT

Sources:  
Lidar and Parcel boundaries - VCGI  
Stone Environmental Inc. conducted a building survey 7/28/2020 of cafeteria building and 65 Pearl Street to create floor plan layouts.  
A building survey was completed 4/1/2020 of 100 River Street building to create floor plan layout.




File: O:\PROJ-19\EAR-19-124\Hearland 100 River Street\Drawings\AutoCAD\19-124\_As-Built.dwg

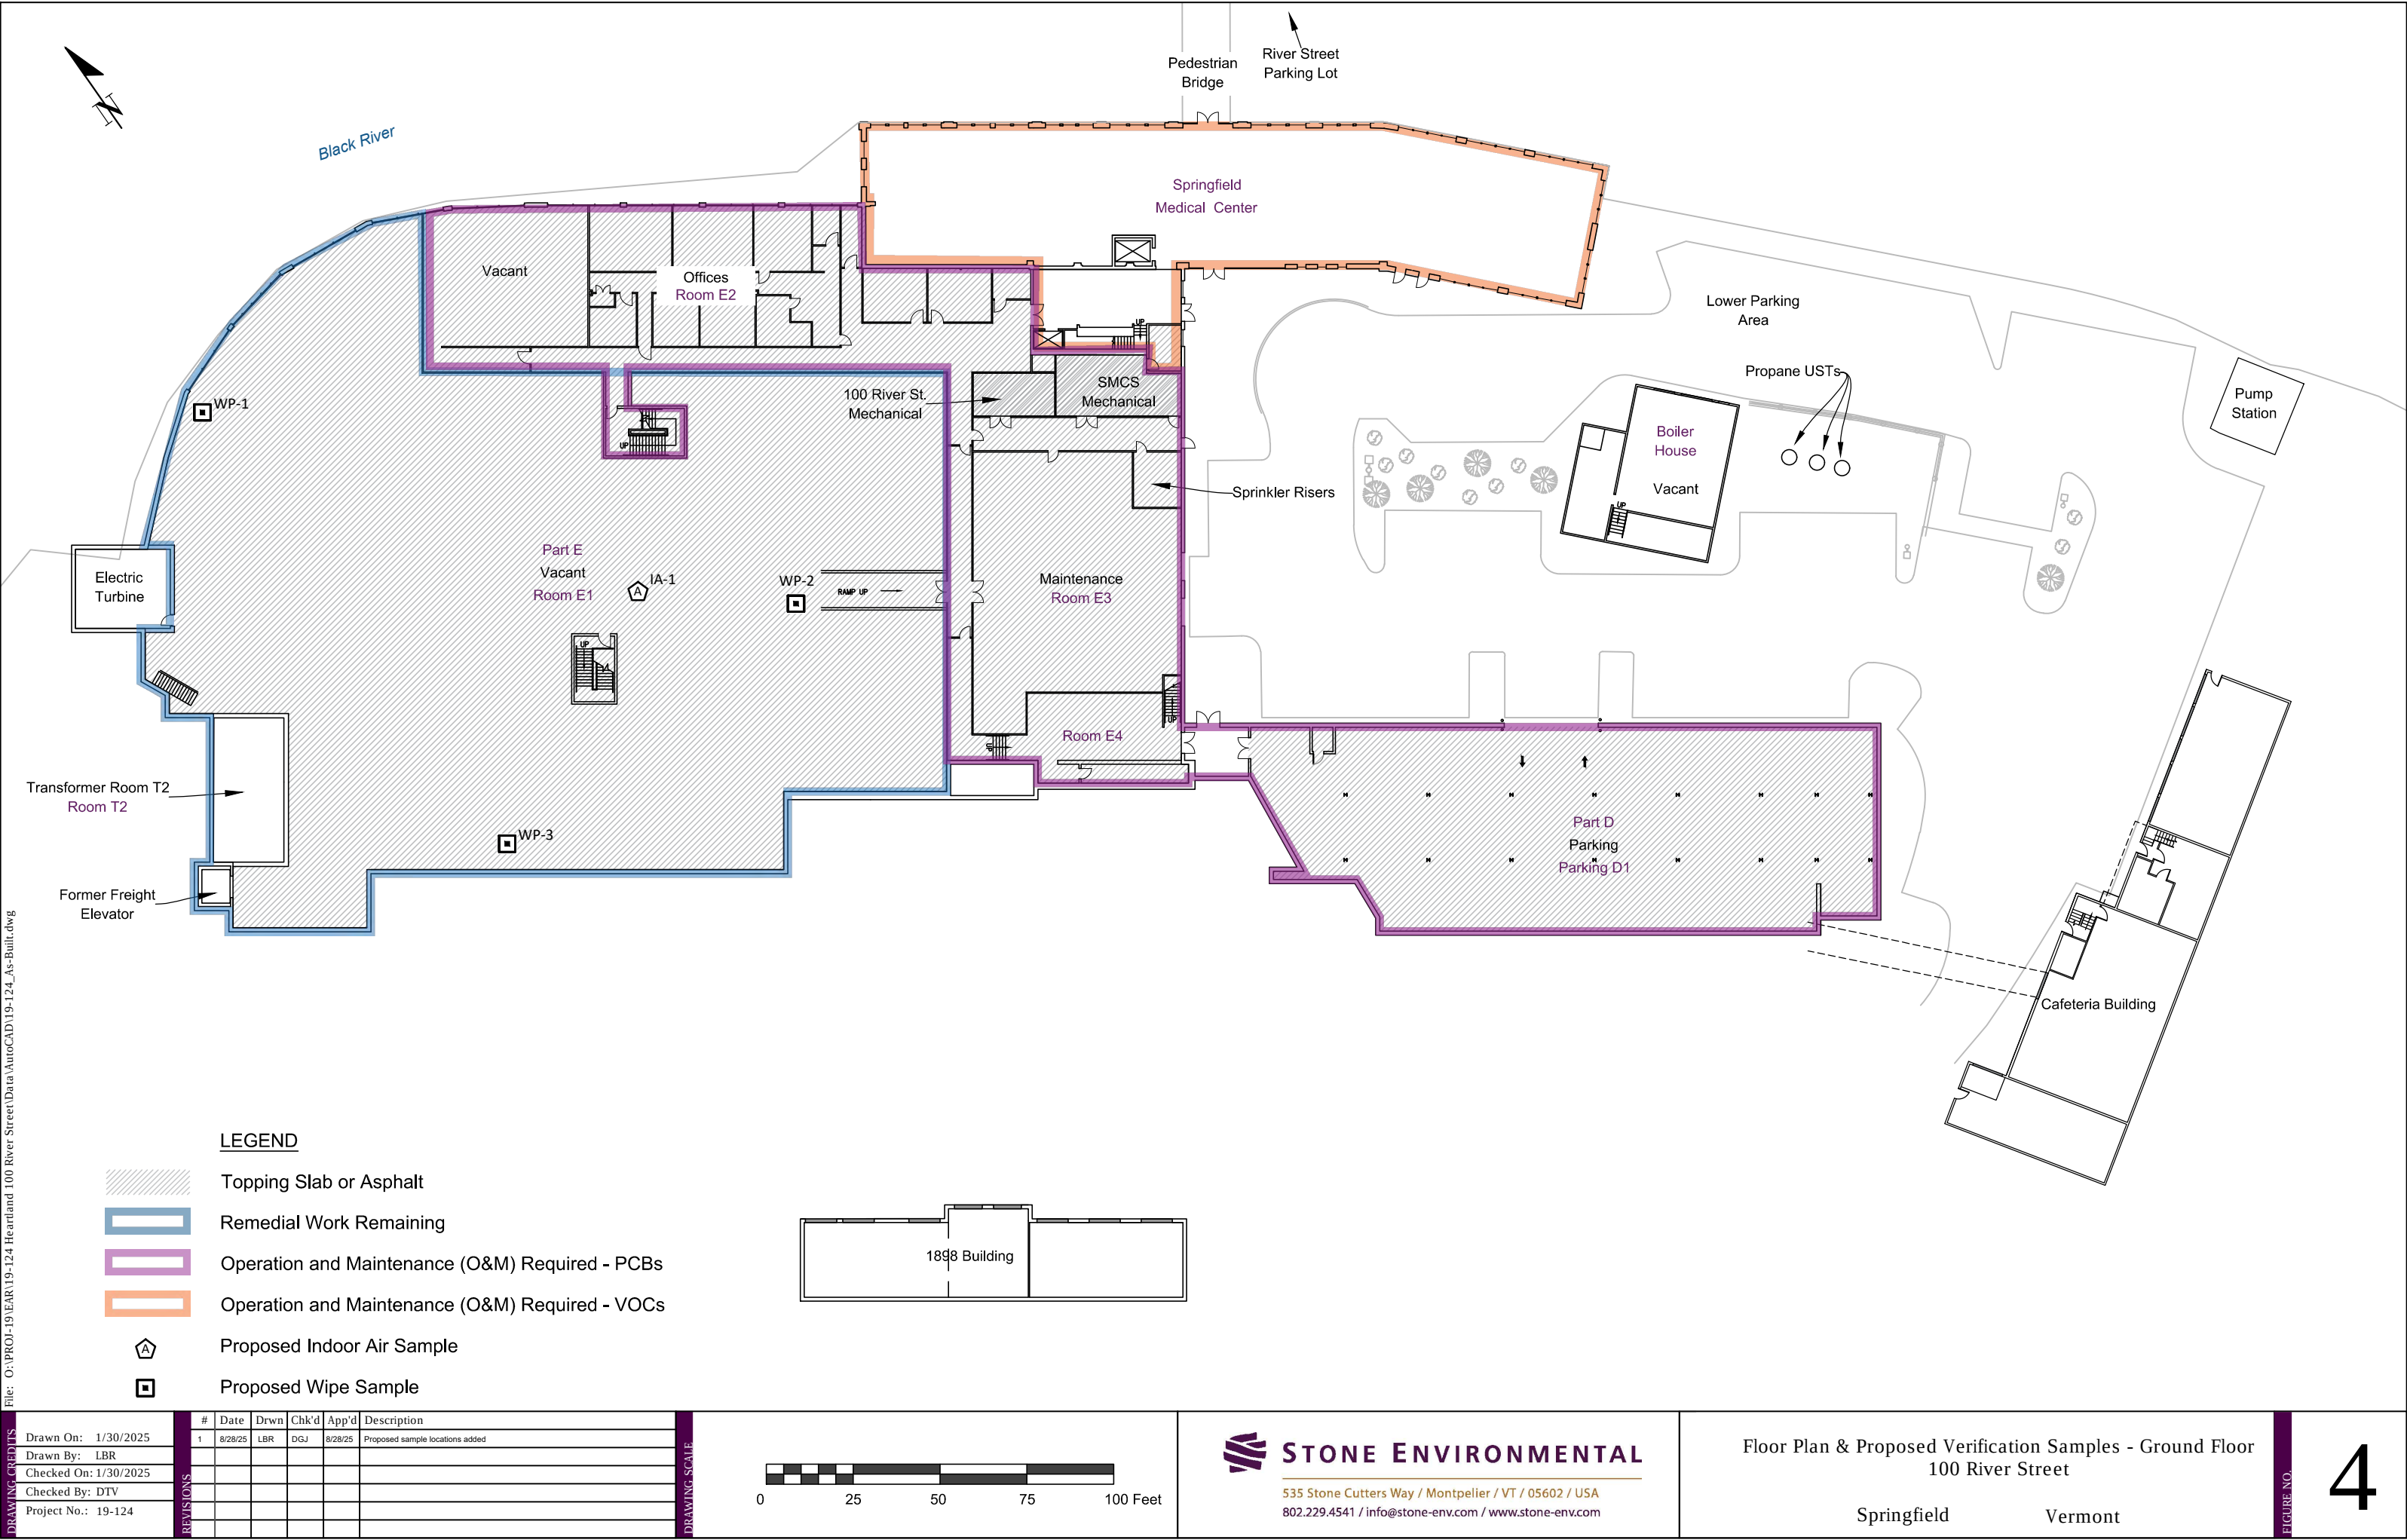

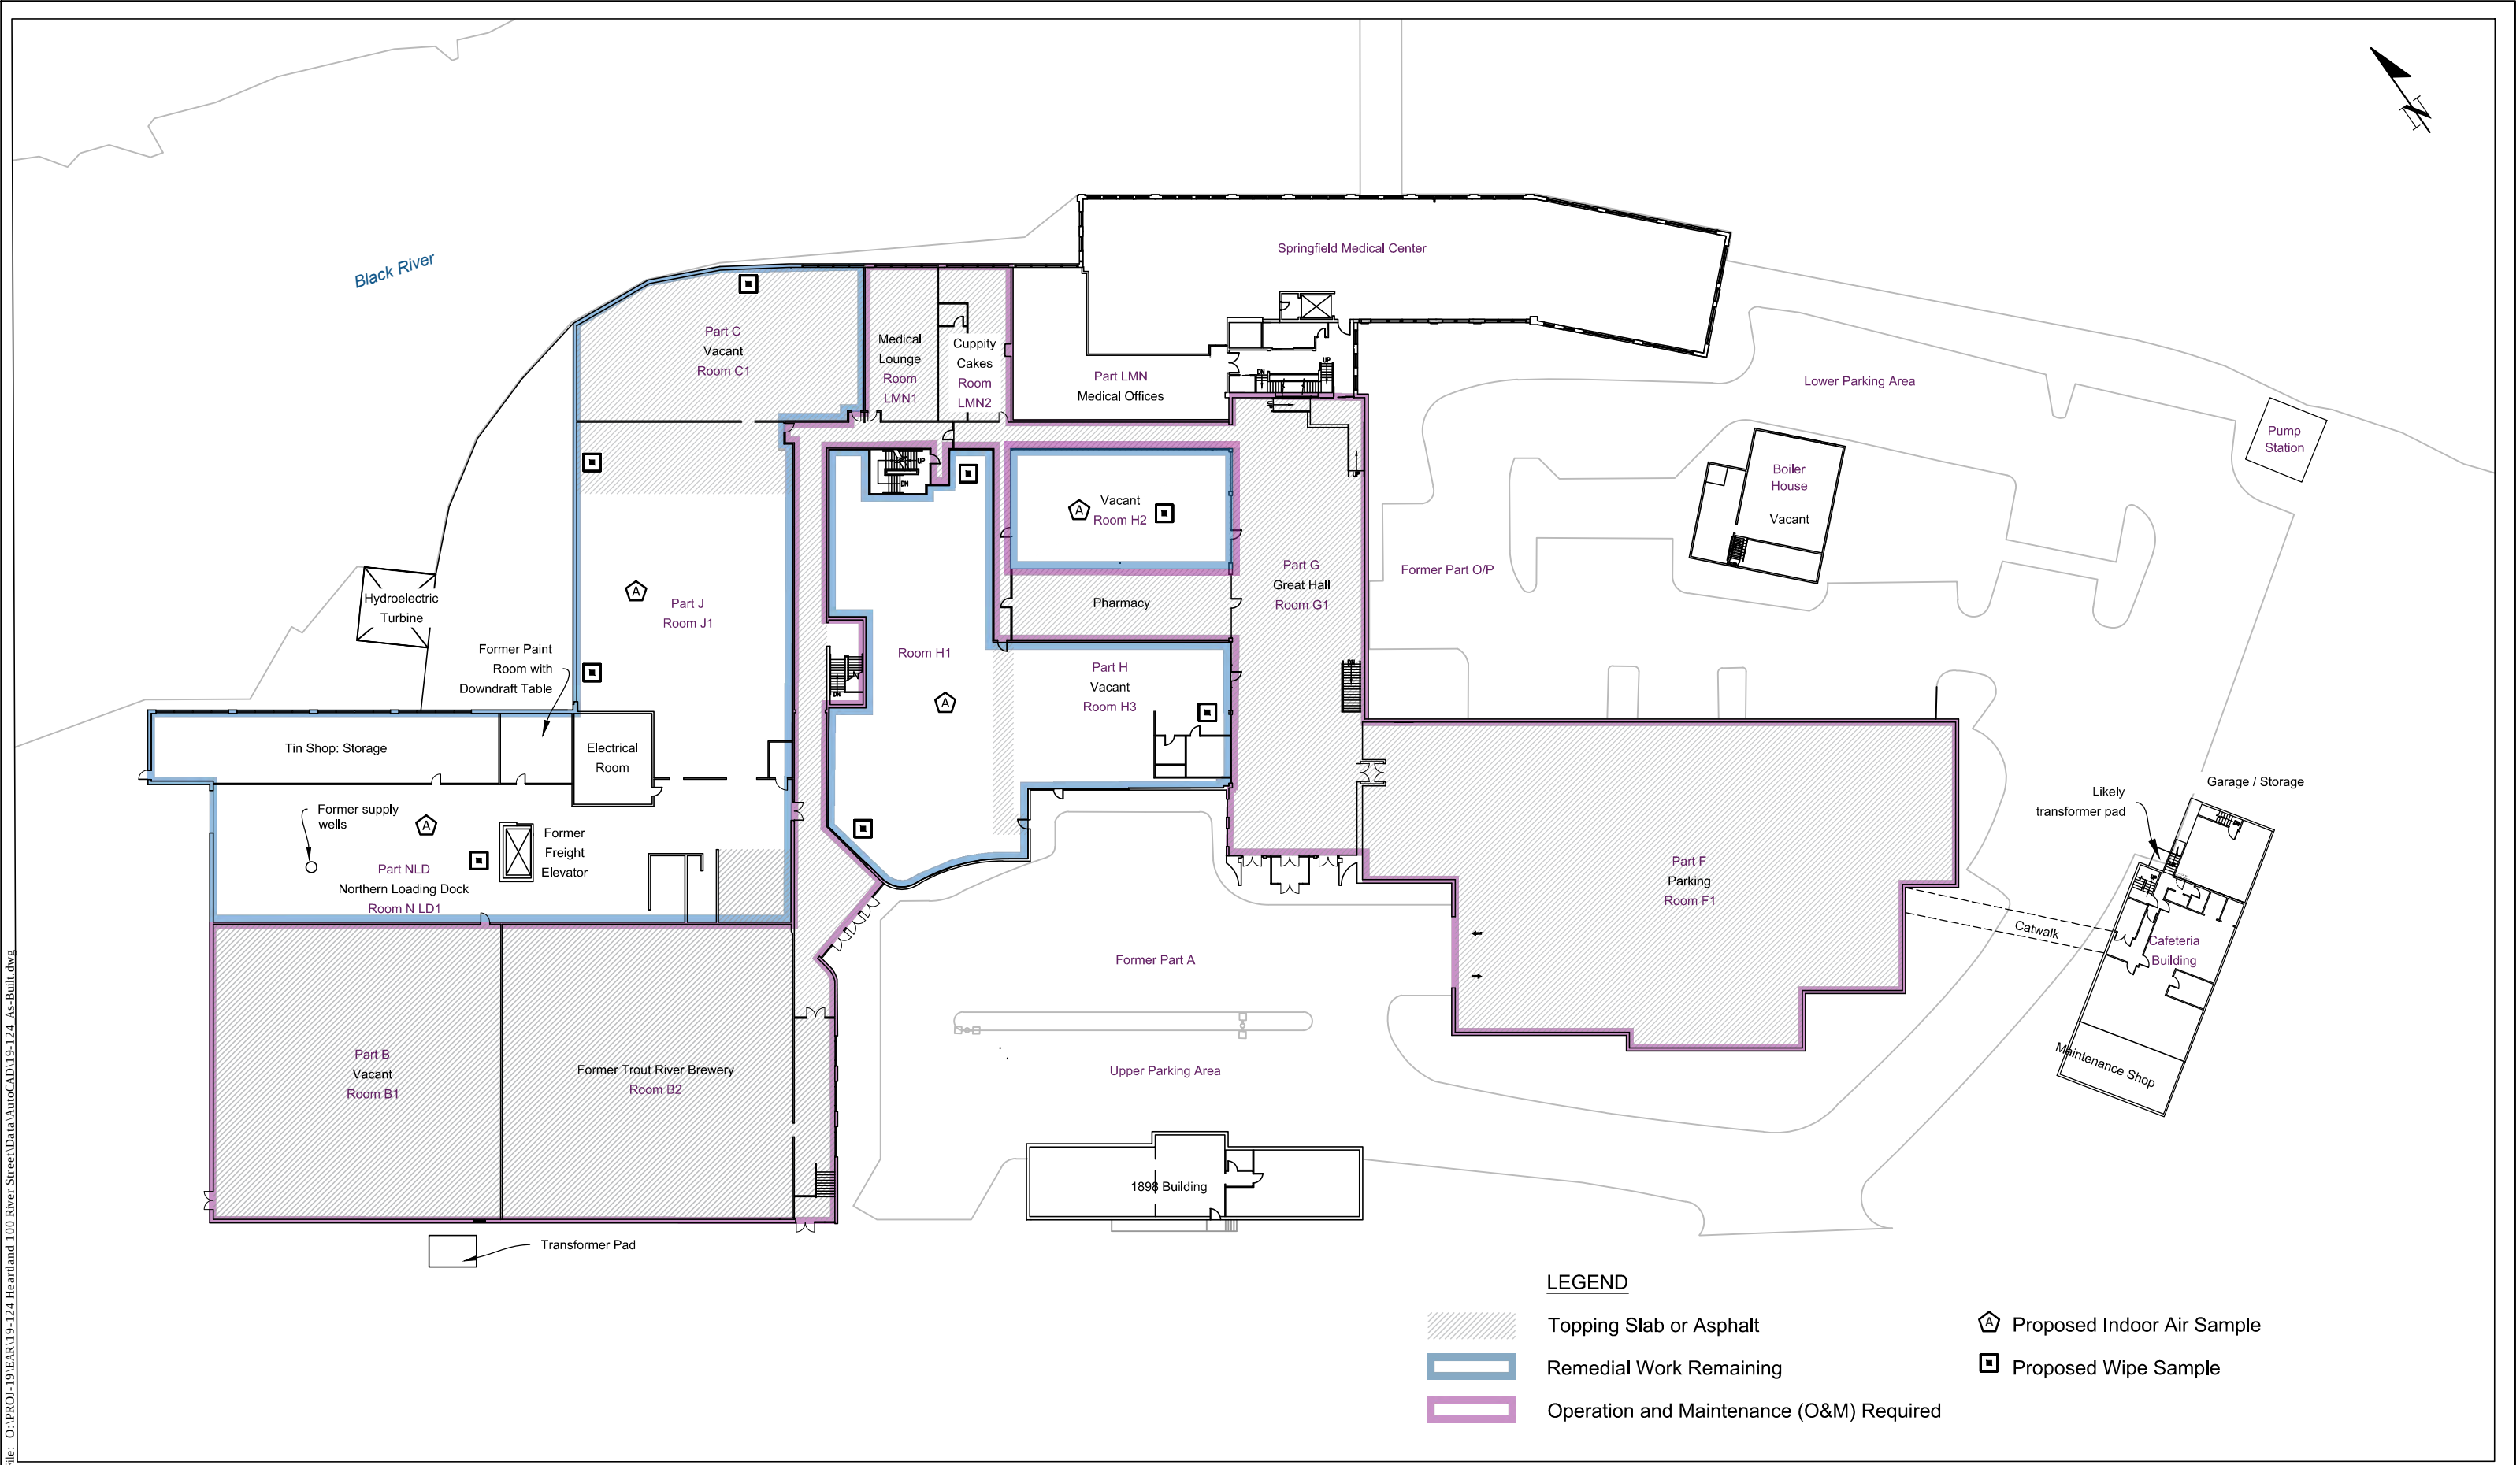

File: O:\PROJ-19\19-124 Heartland 100 River Street\Drawings\19-124 As-Built.dwg

| DRAWING CREDITS      | # | Date    | Drwn | Chk'd | App'd   | Description                     |
|----------------------|---|---------|------|-------|---------|---------------------------------|
|                      | 1 | 8/28/25 | LBR  | DGJ   | 8/28/25 | Proposed sample locations added |
|                      |   |         |      |       |         |                                 |
|                      |   |         |      |       |         |                                 |
|                      |   |         |      |       |         |                                 |
| Drawn On: 7/2/2020   |   |         |      |       |         |                                 |
| Drawn By: LBR        |   |         |      |       |         |                                 |
| Checked On: 7/2/2020 |   |         |      |       |         |                                 |
| Checked By: LJR      |   |         |      |       |         |                                 |
| Project No.: 19-124  |   |         |      |       |         |                                 |




**STONE ENVIRONMENTAL**

535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com



File: O:\PROJ-19\EAR\19-124 River Street\Drawings\19-124\_100\_River.dwg

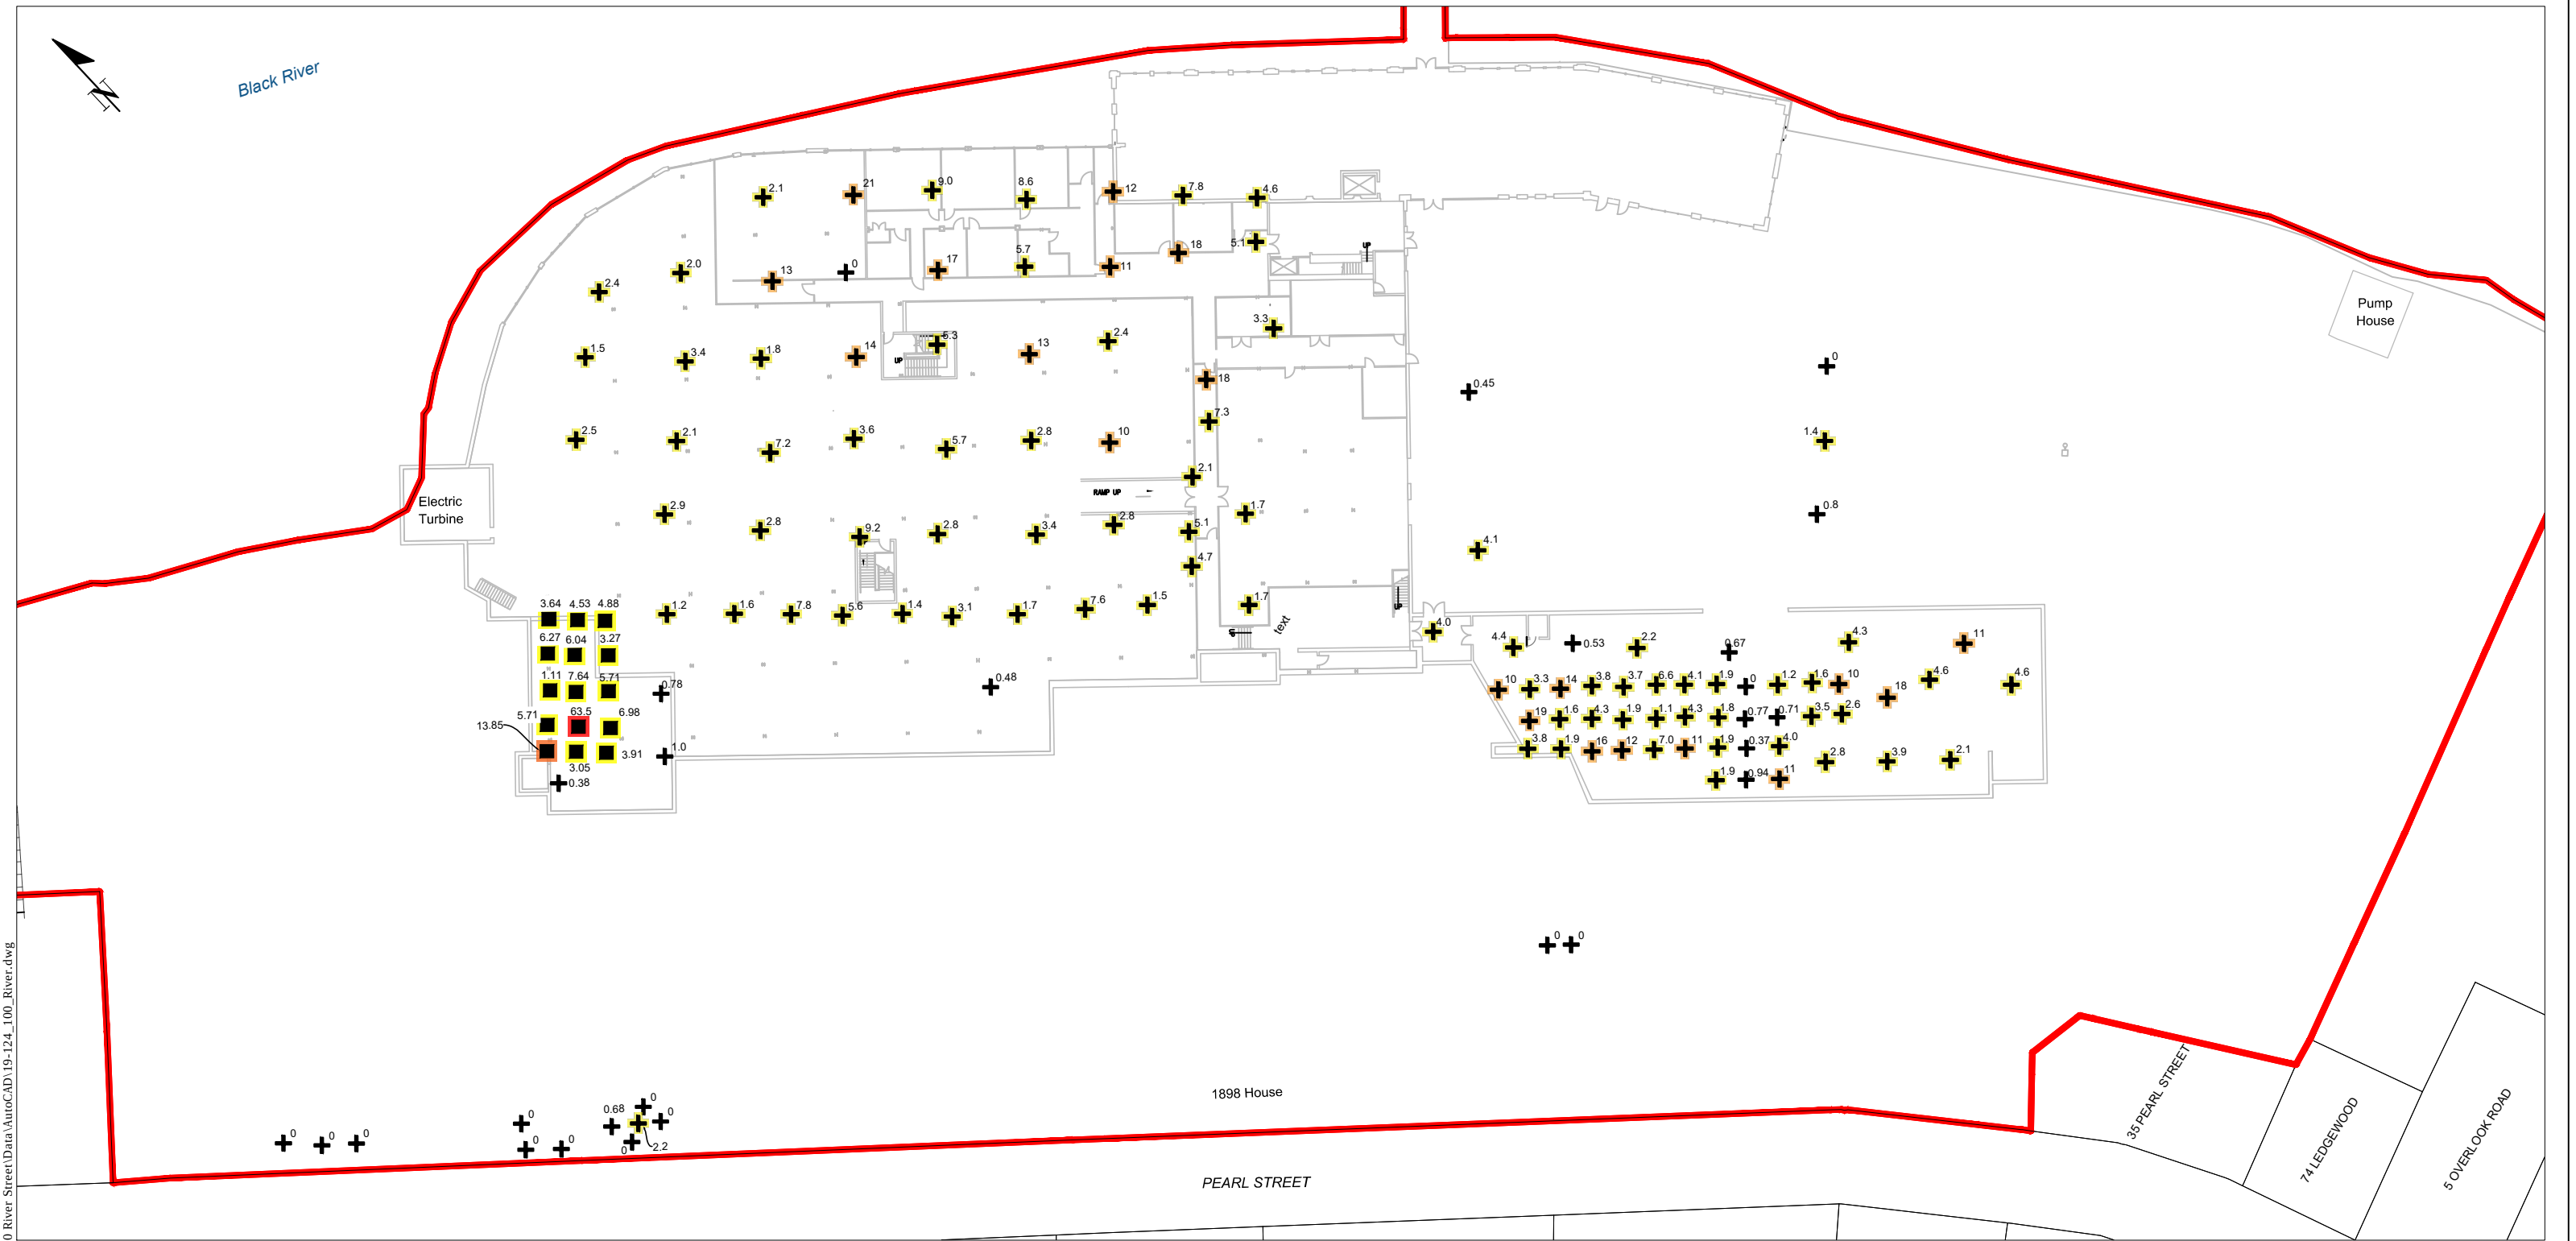

LEGEND

- SITE BOUNDARY
- PARCEL BOUNDARY
- GROUND FLOOR BUILDING LAYOUT
- + PCB SAMPLE
- WIPE SAMPLE

Previous PCB Sample Concentrations

- + Results < 1 mg/Kg or µg/wipe
- + Results 1 - 10 mg/Kg or µg/wipe
- + Results 10 - 49 mg/Kg or µg/wipe
- + Results > 50 mg/Kg or µg/wipe


- Total PCB concentration displayed  
- Wipe concentrations reported in ug/wipe

Notes:  
Concrete sample results shown include those that have been removed during corrective actions.

Sources:  
Vermont Center of Geographic Information - Parcel Boundaries, 1' Contours derived from 2013 - 2017 QL2 lidar data - Statewide  
PCB data with callouts displaying sample name and concentration results collected by Stone Environmental Inc., 9/3/10  
PCB Data with concentration results only collected by Johnson Company Inc prior to 9/3/10.

| DRAWING CREDITS | # | Date      | Drwn | Chk'd | App'd | Description           |
|-----------------|---|-----------|------|-------|-------|-----------------------|
|                 | 1 | 8/21/2020 |      |       |       | Drawn On:             |
|                 |   |           |      |       |       | Drawn By: LBR         |
|                 |   |           |      |       |       | Checked On: 8/21/2020 |
|                 |   |           |      |       |       | Checked By: DTV       |
|                 |   |           |      |       |       | Project No.: 19-124   |
| REVISIONS       |   |           |      |       |       |                       |
|                 |   |           |      |       |       |                       |
|                 |   |           |      |       |       |                       |
|                 |   |           |      |       |       |                       |
|                 |   |           |      |       |       |                       |
|                 |   |           |      |       |       |                       |

DRAWING SCALE




 **STONE ENVIRONMENTAL**  
535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com

SITE MAP WITH HISTORIC  
PCB ANALYTICAL RESULTS - FIRST FLOOR  
100 RIVER STREET  
SPRINGFIELD VERMONT

FIGURE NO.

6

File: O:\PROJ-19\YEAR\19-124 Heartland 100 River Street\Drawings\19-124\_100\_River.dwg

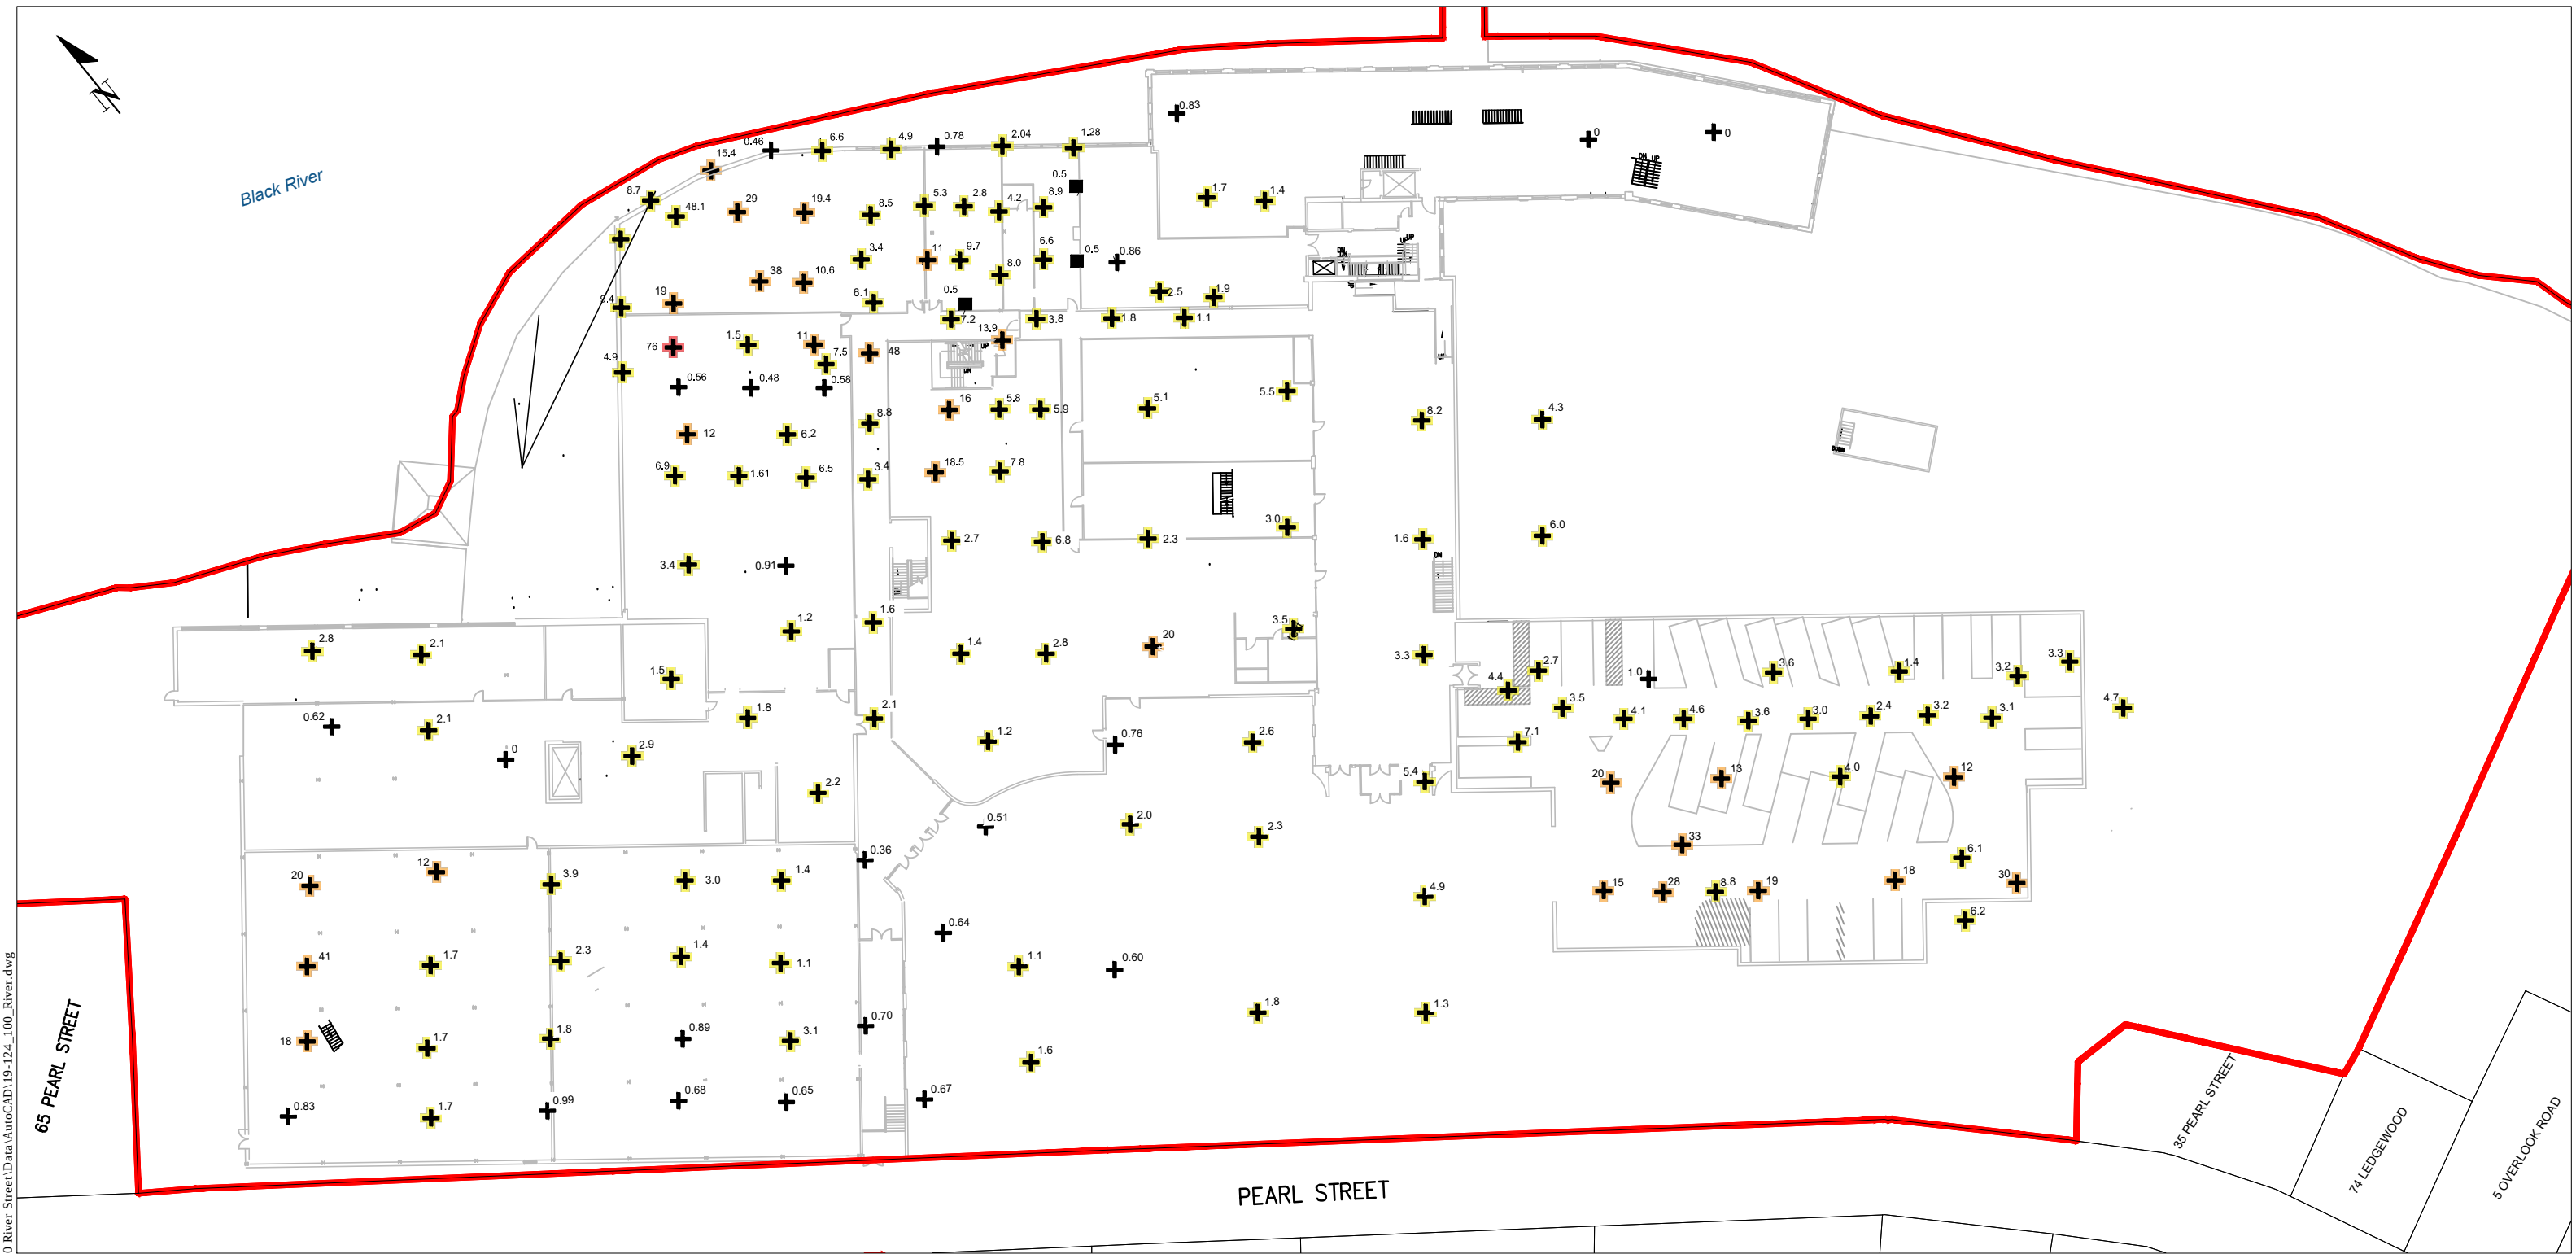

LEGEND

- PCB SAMPLE
- WIPE SAMPLE

Previous PCB Sample Concentrations

- Results < 1 mg/Kg
- Results 1 - 10 mg/Kg
- Results 10 - 49 mg/Kg
- Results ≥ 50 mg/Kg
- Total PCB concentration displayed
- Wipe concentrations reported in ug/wipe

Notes:  
Concrete sample results shown include those that have been removed during corrective actions.

Sources:  
Vermont Center of Geographic Information - Parcel Boundaries, 1' Contours derived from 2013 - 2017 QL2 lidar data - Statewide  
PCB data collected by Stone Environmental Inc., 9/3/10 and Johnson Company Inc prior to 9/3/10.

| DRAWING CREDITS | # | Date      | Drwn | Chk'd | App'd | Description           |
|-----------------|---|-----------|------|-------|-------|-----------------------|
|                 | 1 | 8/21/2020 | LBR  |       |       | Drawn On: 8/21/2020   |
|                 | 2 | 8/21/2020 | DTV  |       |       | Checked On: 8/21/2020 |
|                 | 3 |           |      |       |       | Checked By: DTV       |
|                 | 4 |           |      |       |       | Project No.: 19-124   |
| REVISIONS       | 1 |           |      |       |       |                       |
|                 | 2 |           |      |       |       |                       |
|                 | 3 |           |      |       |       |                       |
|                 | 4 |           |      |       |       |                       |
|                 | 5 |           |      |       |       |                       |

DRAWING SCALE




**STONE ENVIRONMENTAL**  
535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com

SITE MAP  
WITH PCB ANALYTICAL RESULTS - SECOND FLOOR  
100 RIVER STREET  
SPRINGFIELD VERMONT

FIGURE NO.

7

File: O:\PROJ-19\EAR\19-124 Heartland 100 River Street\Drawings\19-124\_As-Built.dwg

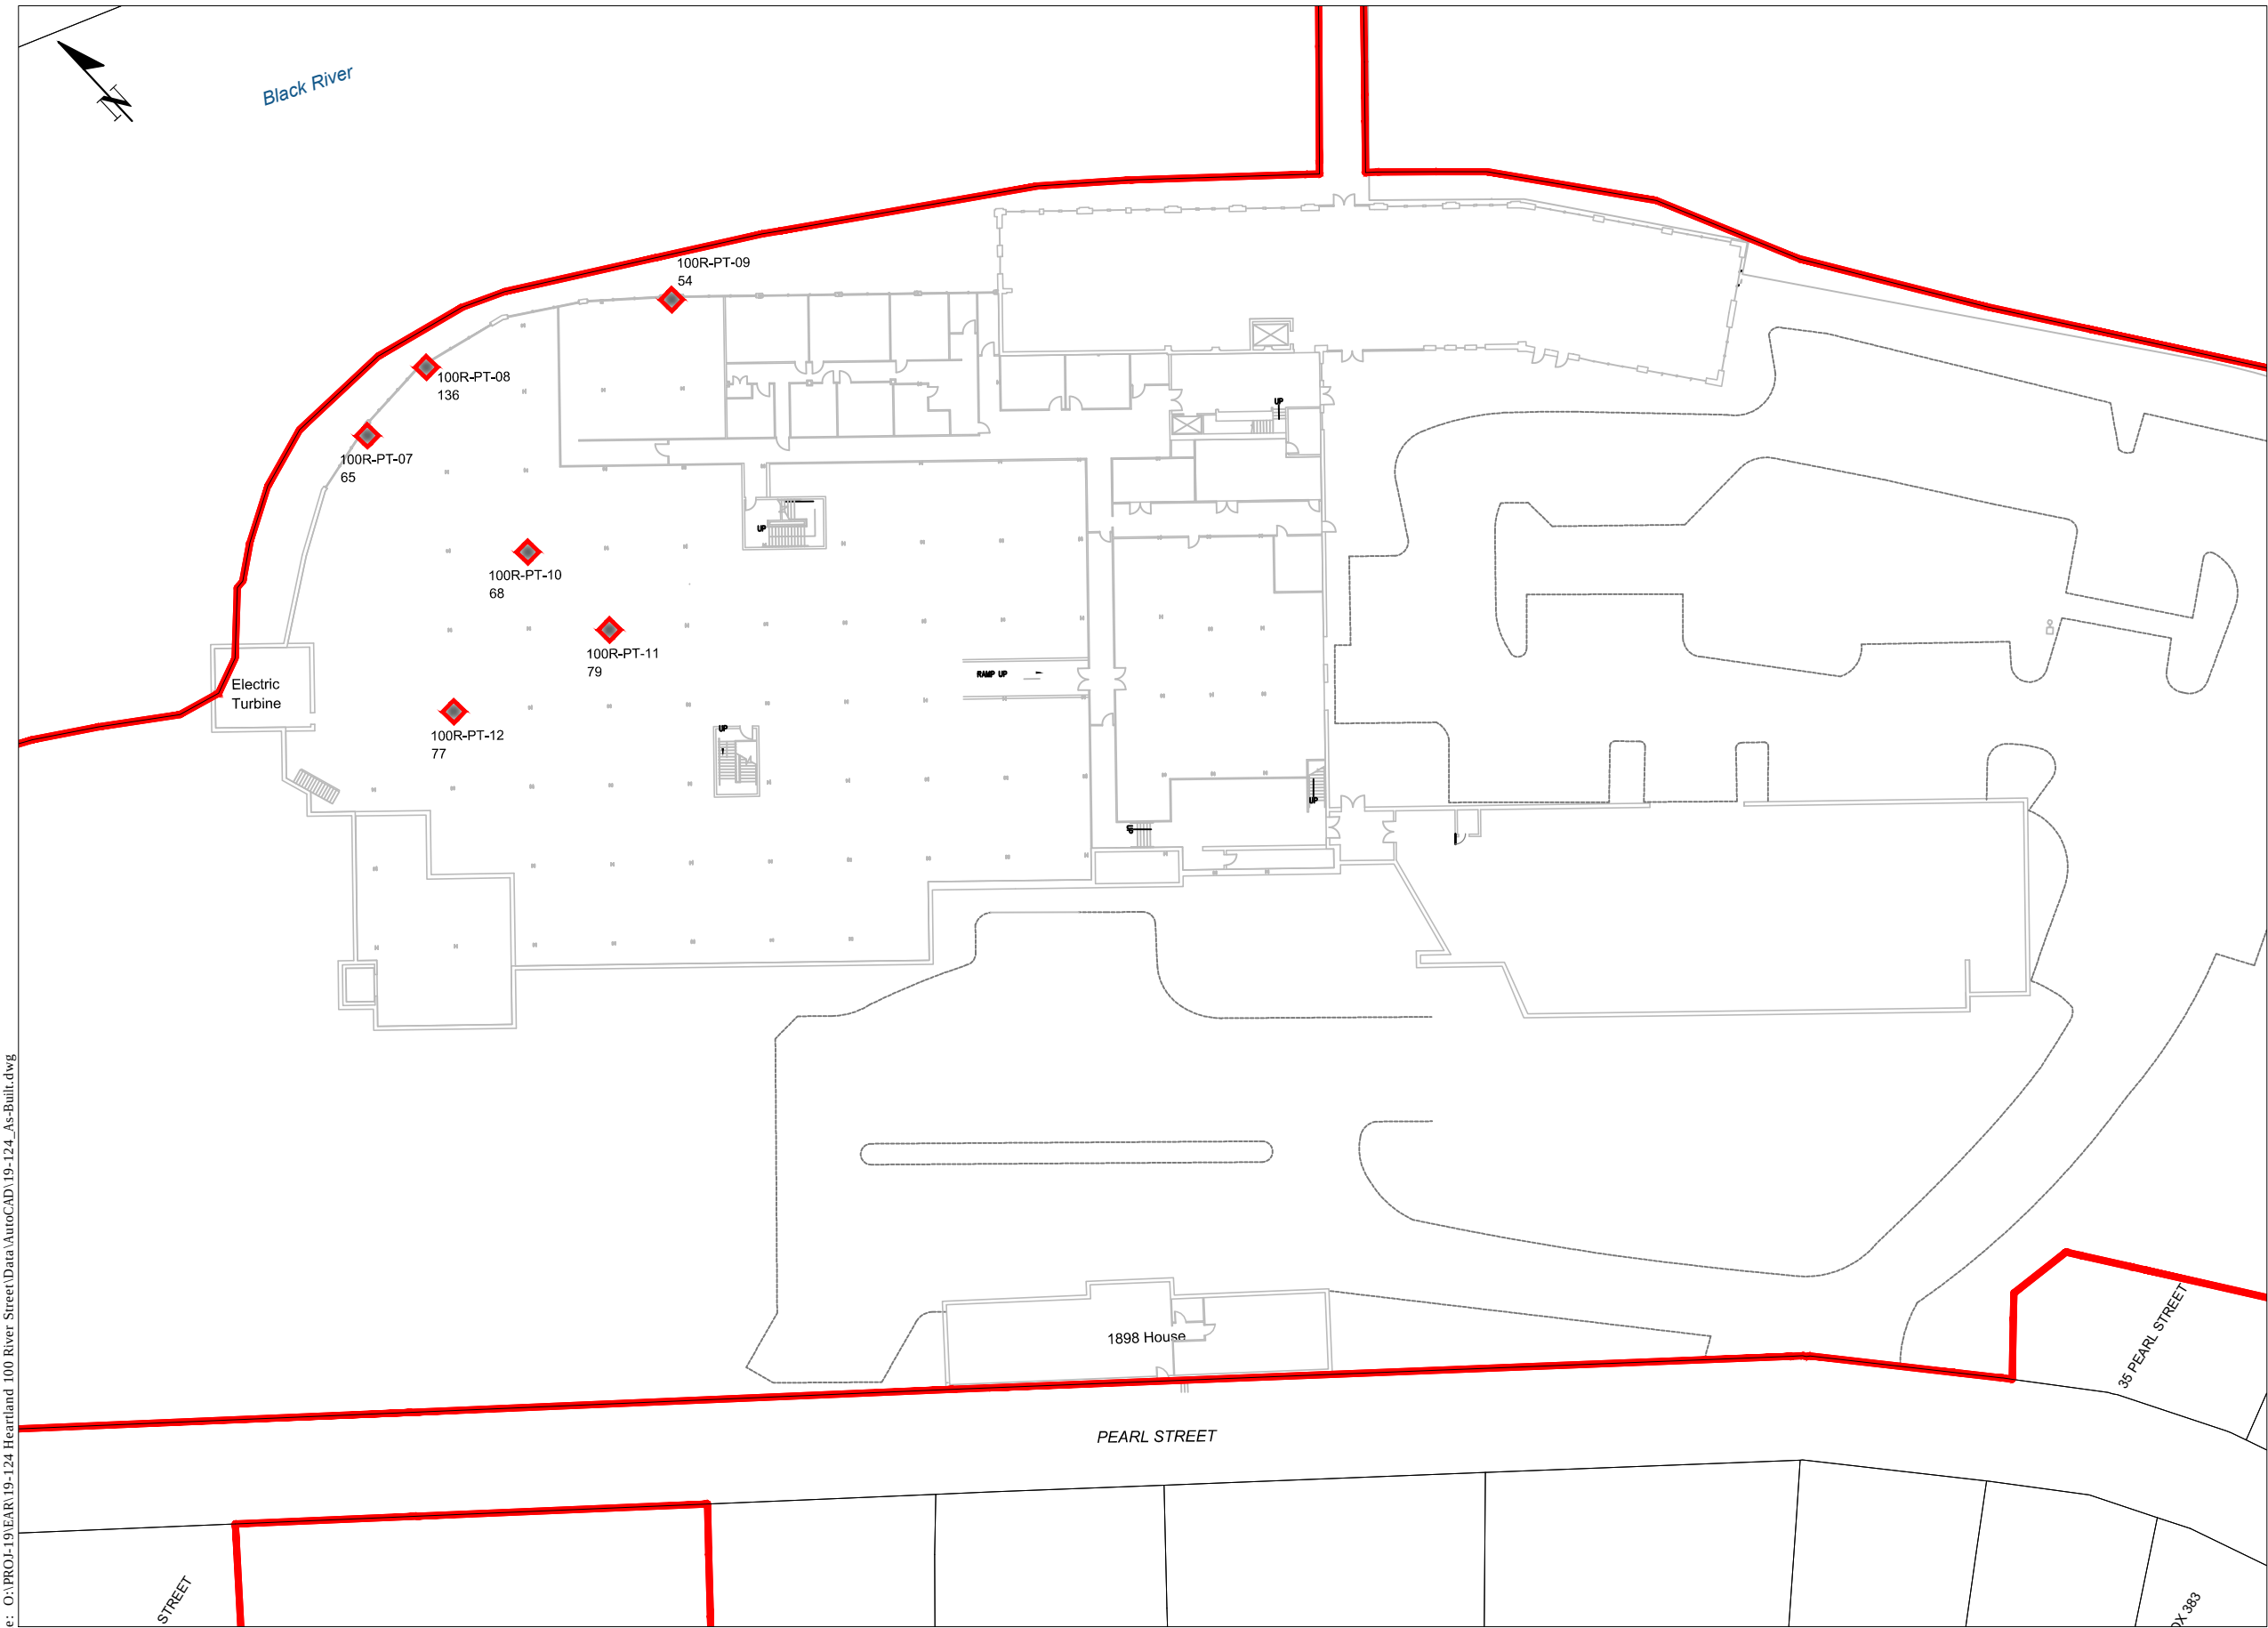


LEGEND

- SITE BOUNDARY
- PARCEL BOUNDARY
- GROUND FLOOR BUILDING LAYOUT
- PARKING LOT
- PAINT (100R-PT-##)
  - Detection;  $\geq 50$  mg/Kg

Sources:  
Vermont Center of Geographic Information - Parcel  
Boundaries,

| DRAWING CREDITS | # | Date      | Drwn | Chk'd | App'd | Description  |
|-----------------|---|-----------|------|-------|-------|--------------|
|                 | 1 | 8/21/2020 |      |       |       | Drawn On:    |
|                 |   |           | LBR  |       |       | Drawn By:    |
|                 |   | 8/21/2020 |      |       |       | Checked On:  |
|                 |   |           | DTV  |       |       | Checked By:  |
|                 |   | 19-124    |      |       |       | Project No.: |
| REVISIONS       | # | Date      | Drwn | Chk'd | App'd | Description  |
|                 |   |           |      |       |       |              |
|                 |   |           |      |       |       |              |
|                 |   |           |      |       |       |              |
|                 |   |           |      |       |       |              |
|                 |   |           |      |       |       |              |

DRAWING SCALE



STONE ENVIRONMENTAL


535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com

SSI PCB ASSESSMENT RESULTS  
FIRST FLOOR  
100 RIVER STREET


SPRINGFIELD VERMONT

FIGURE NO.

8

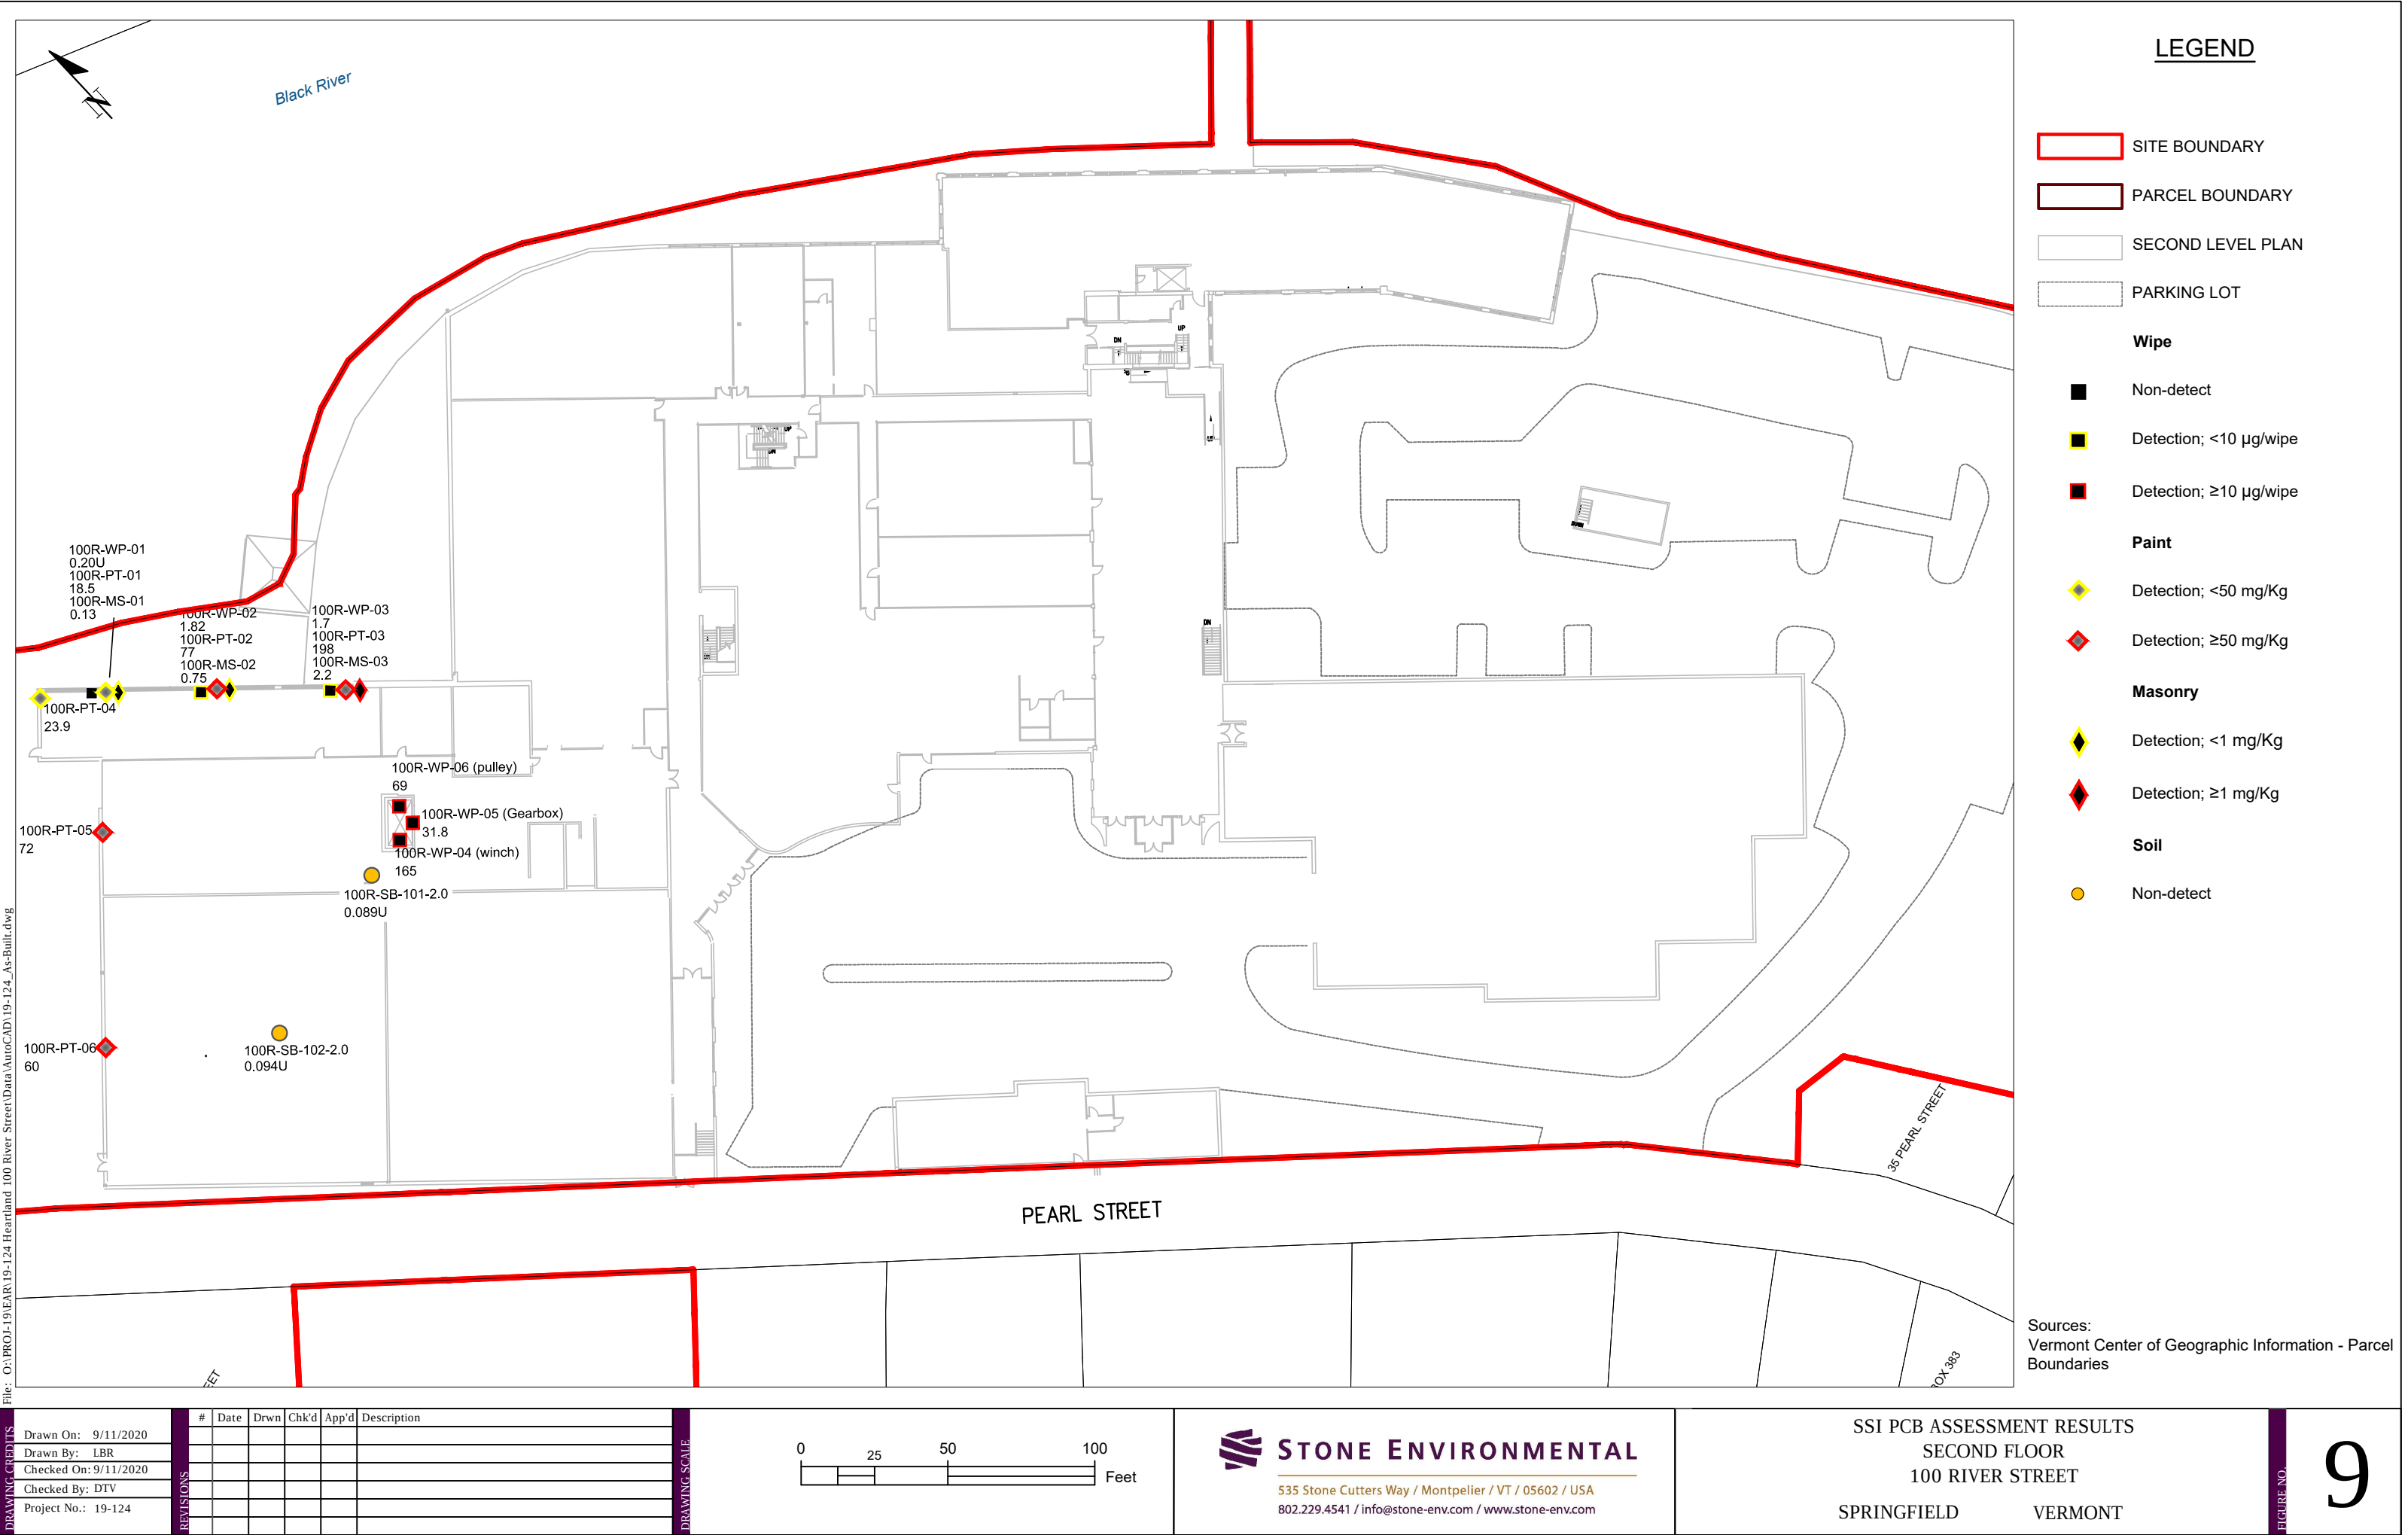


| DRAWING CREDITS | # | Date      | Drwn | Chk'd | App'd | Description  |
|-----------------|---|-----------|------|-------|-------|--------------|
|                 | 1 | 9/11/2020 | LBR  |       |       | Drawn On:    |
|                 | 2 | 9/11/2020 | DTV  |       |       | Checked On:  |
|                 | 3 | 9/11/2020 | DTV  |       |       | Checked By:  |
|                 | 4 | 9/11/2020 | DTV  |       |       | Project No.: |



**STONE ENVIRONMENTAL**

535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com

SSI PCB ASSESSMENT RESULTS  
SECOND FLOOR  
100 RIVER STREET  
SPRINGFIELD VERMONT

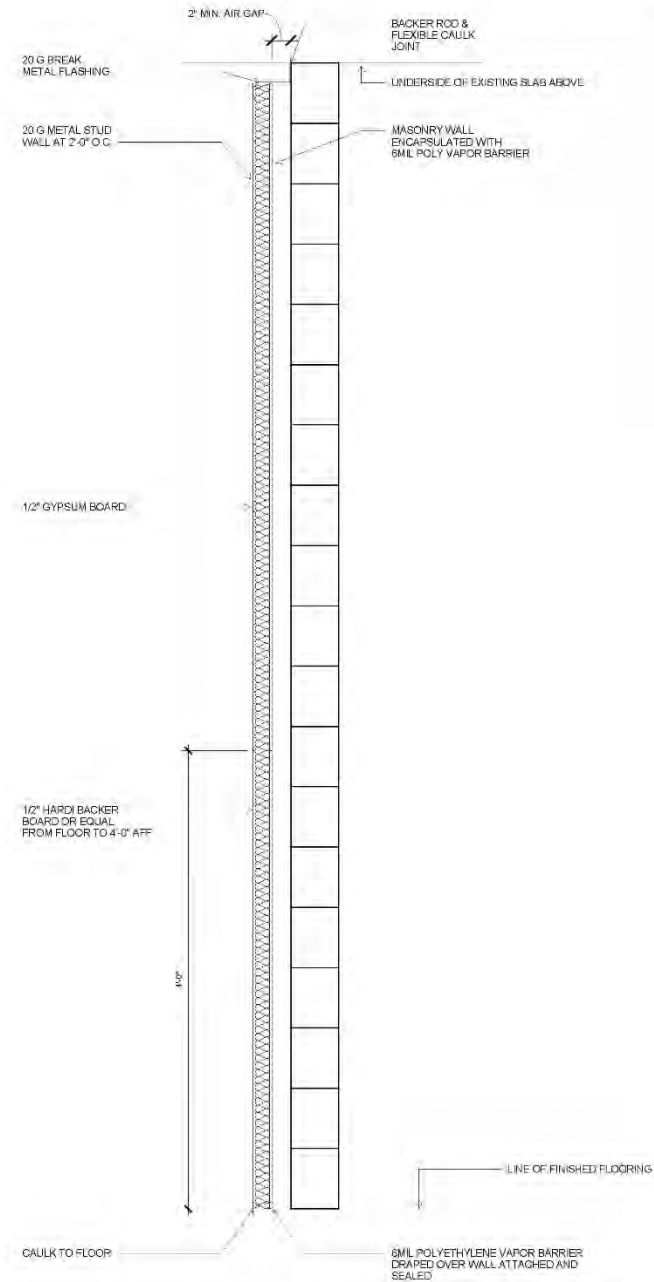

WALL DETAIL

1. FRAMING:  
2" X 4" 20 GA. METAL STUDS @ SPACING PER STRUCTURAL REQUIREMENTS.  
PROVIDE MIN. 2" CLEAR AIR CAVITY BETWEEN STUD FRAMING AND ADJACENT MASONRY WALL.
2. VAPOR BARRIER:  
DRAPE AND SECURE 6 ML POLYETHYLENE VAPOR BARRIER TO MASONRY FACE, EXTENDING TO FRAME SIDE.  
ENSURE CONTINUOUS, UNPUNCTURED COVERAGE.
3. SHEATHING (BASE COURSE):  
INSTALL TWO (2) LAYERS 1/2" HARDIBACKER OR EQUAL  
FROM FLOOR TO 4'-0" ABOVE FINISHED FLOOR (A.F.F.).  
FASTEN PER MANUFACTURER'S RECOMMENDATIONS.
4. WALLBOARD (UPPER COURSE):  
INSTALL 1/2" GYPSUM WALLBOARD FROM TOP OF CEMENT BOARD TO WALL TERMINATION (CEILING, SOFFIT, OR ADJACENT WALL).
5. FINISHES:  
TAPE, SPACKLE, SAND, PRIME, AND APPLY TWO (2) COATS INTERIOR LATEX PAINT TO ALL EXPOSED GYPSUM SURFACES.  
COLOR AND FINISH PER INTERIOR FINISH SCHEDULE.

Fellows Gear Mill

100 River Street  
Springfield, VT

EXISTING  
CONDITIONS

Call us at: (817) 247 9161  
info@existingconditions.com  
www.existingconditions.com

The Most Accurate  
Existing Conditions Surveys and  
As-Built Surveys™

All projects are measured using the most advanced laser measuring equipment and our best standards and practices.  
All work will be field verified by client prior to design or construction or other use.

DISCLAIMERS:

1. It is expressly understood by client that ECS is not an architectural or engineering entity. None of the documents prepared by ECS for client shall have any planning or certification of such legal professionals.
2. This is not a structural or MEP analysis or any distance model. Visible and accessible elements are measured to location only only. Further structural or MEP analysis could be necessary by other.
3. 3. MEASUREMENT BY ELECTRONIC: Surveys performed by ECS under this Agreement will be conducted in a manner consistent with the level of care and skill ordinarily exercised by members of the profession currently practicing in the same locality under similar conditions. No other representations, expression of method, and no warranty or guarantee is included or intended in this Agreement, or in any report, quote, document or otherwise. Client shall verify all work prior to design construction, or other use.
4. These drawings are for the described purposes listed in the scope of work at the time of survey and shall not be used for any other purposes. Use scope of work provided to client for further information.

Laser Scanning Notes:

1. Visit FARO.com and leica.com/products for 3D laser scanner information, range information and product specifications.
2. Laser scanning equipment can't "see" what is behind it. It cannot see through walls or other obstacles. It can only see what is in front of it. It can only see what is in front of it. It can only see what is in front of it.
3. Accuracy over long distances can be improved if the client provides survey information prior to scanning in order to reference the laser scan data into a coordinate system.
4. The final file contains the raw coordinate aligned as point cloud data. All laser scanning by default is in a projected coordinate system. Laser scan coordinates in real-time may be the same as the previous laser scan in any of the specific features and targets. Point cloud equipment available in 3D or 4D or 5D.

Revision Schedule

| Revision Number | Revision Description | Revision Date |
|-----------------|----------------------|---------------|
|                 |                      |               |
|                 |                      |               |
|                 |                      |               |

WALL DETAIL

Date: 10/21/25

Scale: 1/2" = 1'-0"


A-501

Drawn By: Author

Figure 10. Physical Barrier - Wall Detail

100 River Street  
Springfield, Vermont



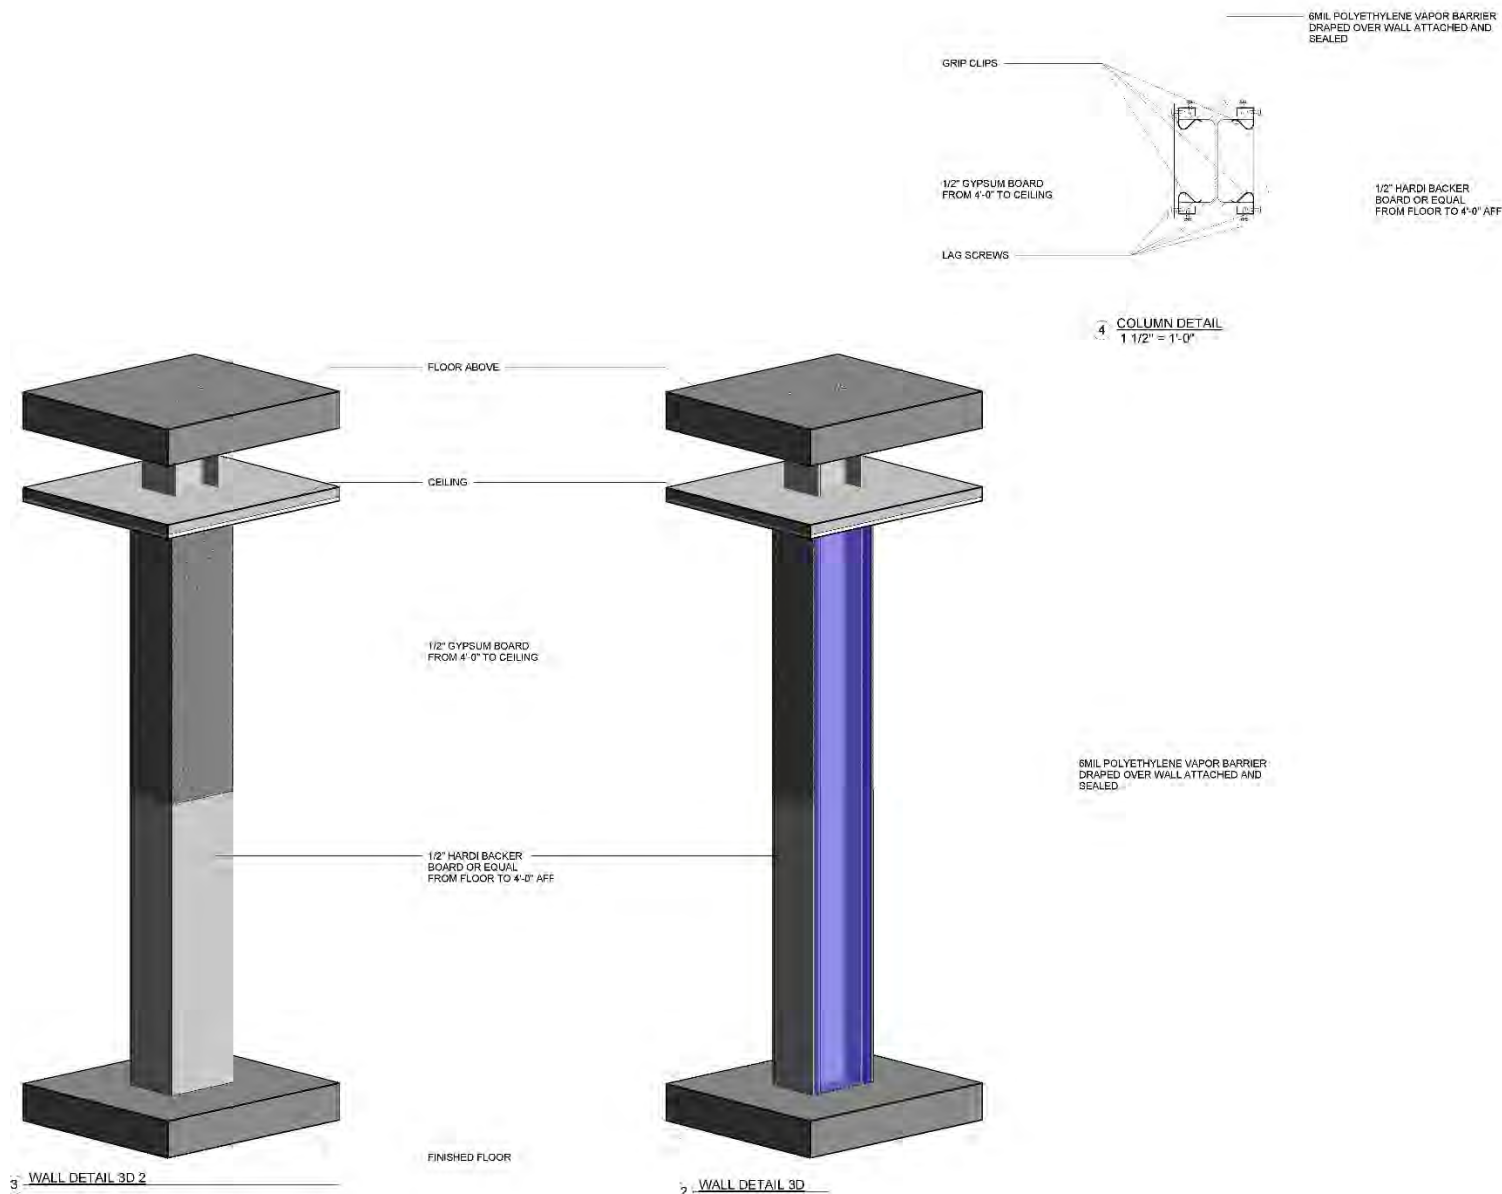

COLUMN DETAIL

1. FRAMING:  
2" X 2" 26-GAUGE METAL STUDS CLIPPED TO COLUMN FLANGE OR BUILT WITH MINIMUM 2" CLEAR AIR CAVITY OFFSET FROM STEEL COLUMN.
2. VAPOR BARRIER:  
DRAPE AND SECURE 6 MIL POLYETHYLENE VAPOR BARRIER ON COLUMN FACE ON THE INSIDE OF THE FRAMED WALL. ENSURE CONTINUOUS UNPUNCTURED COVERAGE.
3. SHEATHING (BASE COURSE):  
FROM FLOOR TO 4'-0" ABOVE FINISHED FLOOR (A.F.F.), INSTALL TWO (2) LAYERS OF 1/2" HARDIE BACKER OR EQUAL. FASTEN PER MANUFACTURER'S INSTRUCTIONS.
4. WALLBOARD (UPPER COURSE):  
INSTALL 1/2" GYPSUM WALLBOARD FROM TOP OF CEMENT BOARD TO WALL TERMINATION (CEILING, SOFFIT, OR ADJACENT WALL).
5. TERMINATIONS / FLASHING:  
AT THE TOP, BOTTOM OR SIDE TERMINATIONS WHERE THE ENCLOSURE INTERFACES WITH MASONRY OR STEEL, PROVIDE 20 GAUGE BREAK METAL FLASHING MECHANICALLY FASTENED TO THE STUD FRAME. INSTALL BACKER ROD AND FLEXIBLE BUTYL SEALANT AT ALL SIDES FOR COMPLETE AIR AND MOISTURE SEAL.
6. FINISHES:  
TAPE, SPACKLE, SAND, PRIME, AND APPLY TWO (2) COATS INTERIOR LATEX PAINT TO ALL EXPOSED GYPSUM SURFACES. COLOR AND FINISH PER INTERIOR FINISH SCHEDULE.

Fellows Gear Mill

100 River Street  
Springfield, VT

EXISTING  
CONDITIONS

Call us at: (617) 247 9161  
info@existingconditions.com  
www.existingconditions.com

The Most Accurate  
Existing Conditions Surveys and  
As-Built Surveys™

All projects are reviewed using the most advanced laser  
measuring equipment and our best standards and practices.  
All work will be field verified by client prior to design or  
construction on other sites.

General Notes:

1. It is acknowledged that the design of this project is based on the information provided by the client and the design team. The design team is not responsible for the accuracy of the information provided by the client.
2. The design team is not responsible for the accuracy of the information provided by the client.
3. The design team is not responsible for the accuracy of the information provided by the client.
4. The design team is not responsible for the accuracy of the information provided by the client.
5. The design team is not responsible for the accuracy of the information provided by the client.
6. The design team is not responsible for the accuracy of the information provided by the client.
7. The design team is not responsible for the accuracy of the information provided by the client.
8. The design team is not responsible for the accuracy of the information provided by the client.
9. The design team is not responsible for the accuracy of the information provided by the client.
10. The design team is not responsible for the accuracy of the information provided by the client.

Use Schedule:

1. The design team is not responsible for the accuracy of the information provided by the client.
2. The design team is not responsible for the accuracy of the information provided by the client.
3. The design team is not responsible for the accuracy of the information provided by the client.
4. The design team is not responsible for the accuracy of the information provided by the client.
5. The design team is not responsible for the accuracy of the information provided by the client.
6. The design team is not responsible for the accuracy of the information provided by the client.
7. The design team is not responsible for the accuracy of the information provided by the client.
8. The design team is not responsible for the accuracy of the information provided by the client.
9. The design team is not responsible for the accuracy of the information provided by the client.
10. The design team is not responsible for the accuracy of the information provided by the client.

Revision Schedule

| Revision Number | Revision Description | Revision Date |
|-----------------|----------------------|---------------|
|-----------------|----------------------|---------------|

COLUMN  
DETAIL

Date: 10/21/25

Scale: 1 1/2" = 1'-0"

Drawn By: Author

A-502

Figure 10. Physical Barrier - Column Detail

100 River Street  
Springfield, Vermont

---

## Appendix B: TSCA Approval Letter Re-Issue

---



**TRANSMITTED BY ELECTRONIC MAIL**

One Hundred River Street, LLC  
Attn: Mr. Richard Genderson  
100 River Street  
Springfield, Vermont

One Hundred River Street Venture, LLC  
Attn: Mr. Mark Ellenbogen  
4438 Ingrahm Street PMB 216  
San Diego, California 92109

Re: Re-Issue and-PCB Risk-Based Disposal Approval under 40 CFR § 761.61(c)  
Former Fellows Gear Shaper Facility  
Springfield, Vermont

Dear Messrs. Genderson and Ellenbogen,

This letter is in response to the request from One Hundred River Street, LLC to re-issue the Risk-based Disposal Approval for the former Fellows Gear Shaper Facility (the "Site") dated October 13, 2010 (the "Approval") to the current property owner, One Hundred River Street Venture, LLC in accordance with the provisions of Attachment 1, Condition 18 of the Approval.

By this letter, EPA Region 1 grants the request to transfer the Approval to One Hundred River Street Venture LLC which has agreed to accept all the responsibilities for the remaining tasks at the Site (see Attachment 2).

Concerning the modification submitted to EPA on February 3, 2026, as there is no substantive change to the remedy by adding the physical barrier to the walls and column, the previous determination that there was no unreasonable risk to health or the environment remains applicable.

Based on EPA Region 1's review of the information provided by all parties, and in accordance with Condition 18 of Attachment 1 to the Approval, EPA Region 1 hereby reissues the Approval to One Hundred River Street Venture LLC subject to the following conditions:

1. The Approval incorporated herein by reference and, as affected by this letter, shall be in full force and effect and binding on 100 River Street Venture, LLC, with 100 River Street Venture, LLC assuming the remaining obligations under the Approval, which shall include, but not be limited to, the ongoing monitoring and maintenance requirements as set forth in the Monitoring and Maintenance Implementation Plan ("MMIP"). 100 River Street Venture LLC and

any future transferees of the Property will be subject to, and have the benefit of, the Sale, Lease, or Transfer Condition in connection with any subsequent sale, lease, or transfer of the Property after the date the owner files the deed restriction.

2. 100 River Street Venture, LLC shall provide written notification to EPA of its acceptance of and intention to comply with the terms and conditions of the reissued Approval within fifteen (15) business days of receipt of this letter. The reissued approval may be withdrawn if the EPA does not receive written notification from the new owner(s), lessee or transfer entity of its acceptance of, and intention to comply with, the terms and conditions of the re-issued approval within this 15-day period. This 15-day period replaces the 30-day period of Condition 18.c. in the Sale, Lease, or Transfer Condition.
3. 100 River Street Venture, LLC shall submit documentation of its title to the Property and an executed and recorded deed restriction within 15 business days of receipt of this letter.
4. 100 River Street Venture, LLC shall provide the name and contact information for its designated off-site representative as well as a designated representative of any tenant which is located on-site for the reissued Approval within 15 business days of receipt of this letter.

Please note that upon completion of the activities authorized under this Approval, the Site owner will be required to record a notation with the property's deed (Attachment 1, Condition 16) which will identify the PCB contamination remaining at the Site and the long-term monitoring and maintenance requirements.

Questions and correspondence on this Approval should be directed to: R1PCBS@epa.gov

EPA shall not consider this project complete until it has received all submittals required under this Approval. Please be aware that upon EPA receipt and review of the submittals, EPA may request any additional information necessary to establish that the work has been completed in accordance with 40 CFR Part 761, the Notification, and this Approval.

Sincerely,

Stephanie Carr, Director  
Land, Chemicals and Redevelopment Division

Cc: David Jensen, PE, [djensen@stone-env.com](mailto:djensen@stone-env.com), Stone Environmental  
Shawn Donovan, [Shawn.donovan@vermont.gov](mailto:Shawn.donovan@vermont.gov), VTDEC

Attachment 1: 2010 PCB Approval Conditions and 2011 Modification

Attachment 2: Transfer Letters- Current and Former Owners

Attachment 3: Addendum 3 to TSCA Cleanup Notification, 100 River Street, Springfield, Vermont

ATTACHMENT 1

FILE COPY



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
REGION I  
5 POST OFFICE SQUARE, SUITE 100  
BOSTON, MASSACHUSETTS 02109-3912

**CERTIFIED MAIL - RETURN RECEIPT REQUESTED**

OCT 13 2010

Bob Flint, President  
Precision Valley Development Corporation  
c/o Springfield Regional Development Corporation  
14 Clinton Street, Suite 7  
Springfield, Vermont 05156

Mr. John Meekin  
One Hundred River Street LLC  
14803-L Southlawn Lane  
Rockville, Maryland 20850

Re: PCB Risk-Based Disposal Approval under 40 CFR § 761.61(c)

Dear Messrs. Flint and Meekin:

This is in response to the Notification<sup>1</sup> by Precision Valley Development Corporation (PVDC) and One Hundred River Street, LLC for approval of a risk-based plan to address PCB-contamination at the former Fellows Gear Shaper Facility, 100 River Street, Springfield, Vermont. PCB contamination that exceeds the allowable PCB levels for unrestricted use under the federal PCB regulations at 40 CFR § 761.61(a) is present in building concrete floors and walls.

Under previous EPA approvals, PVDC has conducted cleanup of PCBs in a former manufacturing area; the chip shed; a transformer area; and Part E located on the lower level of the main building, which included the T2 transformer area. Under this Notification, PVDC has indicated that it will be responsible for initiating this PCB cleanup plan, but that it intends to transfer ownership of the property to One Hundred River Street, LLC once PVDC's cleanup grant funding is expended. After the transfer, One Hundred River Street LLC will then be responsible for completion of the PCB cleanup.

<sup>1</sup> Information was submitted by the Johnson Company and Stone Environmental Inc. on behalf of PVDC to support a risk-based disposal approach for PCB remediation waste under 40 CFR § 761.61(c). Information was submitted dated April 30, 2010 (Notification); August 10, 2010 (Amendment 1 to Notification); October 5, 2010 (Amendment 2 to Notification); October 8, 2010 (Response to EPA comments); and, October 12, 2010 (Response to EPA comments). These submissions will be referred to as the "Notification."



SEMS DocID 100026694



Y900 3117

PCB Risk-Based Disposal Approval  
Page 2 of 3

PVDC and One Hundred River Street, LLC have proposed a plan to address the remaining PCB contamination at the facility under the PCB risk-based disposal option at 40 CFR § 761.61(c) that includes the following activities:

- Demolish Parts A, O and P, remove and dispose of associated PCB-contaminated soils, and place an asphalt cover over the areas for reuse as parking;
- Remove and dispose of PCB-contaminated electrical conduit and associated concrete located in Part A as a greater than or equal to ( $\geq$ ) 50 part per million (ppm) PCB waste;
- Remove and dispose of PCB-contaminated water contained in the underground vault located in the T2 electrical room;
- Remove and dispose of PCB-contaminated concrete and soils located in exterior transformer locations;
- Wash interior *porous surfaces* to remove dust, dirt, and debris;
- Cap PCB-contaminated concrete on the floors located in Parts C, G, H, J, LMN, and Hall beneath a vapor barrier and 4-inches of concrete;
- Cap PCB-contaminated concrete on the floor located in Parts D and F with 2-inches of asphalt for reuse as parking;
- Encapsulate PCB-contaminated concrete on the walls in Parts C, G, H, J, LMN, and Hall with an 2-colored epoxy-based paint;
- Establish a long-term monitoring and maintenance plan for monitoring of indoor air and surfaces and maintenance of physical barriers; and,
- Record a deed restriction to document the PCB contamination at the Site.

EPA finds that the proposed soil cleanup and verification sampling is reasonable and that the proposed abatement measures should effectively prevent direct exposure of the PCB-contaminated *porous surfaces* to building tenants and Site users provided the barriers are maintained. As such, EPA may approve the proposed work under § 761.61(c).

PVDC may proceed with its project in accordance with 40 CFR § 761.61(c); its Notification; and, this Approval, subject to the conditions of Attachment 1. Following completion of the activities authorized under this Approval, the PCB surface wipe samples and PCB indoor air samples should indicate that there is no unreasonable risk to future tenants or Site users. However, under this Approval, EPA is reserving its rights to require additional mitigation measures should indoor air concentrations or surface wipe sample results indicate that PCBs are present at concentrations which could result in a risk to Site users or tenants.

PCB Risk-Based Disposal Approval  
Page 3 of 3


Please note that upon completion of the activities authorized under this Approval, the Site owner will be required to record a notation with the property's deed (Attachment 1, Condition 16) which will identify the PCB contamination remaining at the Site and the long-term monitoring and maintenance requirements.

Questions and correspondence on this Approval should be directed to:

Kimberly N. Tisa, PCB Coordinator (OSRR07-2)  
United States Environmental Protection Agency  
5 Post Office Square, Suite 100  
Boston, Massachusetts 02109-3912  
Telephone: (617) 918-1527  
Facsimile: (617) 918-0527

EPA shall not consider this project complete until it has received all submittals required under this Approval. Please be aware that upon EPA receipt and review of the submittals, EPA may request any additional information necessary to establish that the work has been completed in accordance with 40 CFR Part 761, the Notification, and this Approval.

Sincerely,



James T. Owens, III, Director  
Office of Site Remediation & Restoration

cc T. Coppelino, VTDEC  
A. Peterson, EPA  
D. Voisin, Stone Environmental  
Springfield Department of Health  
File

Attachment 1

**ATTACHMENT 1:**

**PCB CLEANUP AND DISPOSAL APPROVAL CONDITIONS  
PRECISION VALLEY DEVELOPMENT CORPORATION  
"REST OF BUILDING"  
100 RIVER STREET  
SPRINGFIELD, VERMONT**

**GENERAL CONDITIONS**

1. This Approval is granted under the authority of Section 6(e) of the Toxic Substances Control Act (TSCA), 15 U.S.C. § 2605(e), and the PCB regulations at 40 CFR Part 761, and applies solely to *PCB remediation waste* identified in the Notification as shown on Figure 3 and Figure 4 of the April 30, 2010 submittal. Specifically, the following areas will be addressed under this Approval:
  - a. Parts A, C, D, F, G, H, J, LMN, O, and P
  - b. Hallway
  - c. Underground vault located in the T2 area
  - d. Exterior transformer locations
  - e. Cutting oil recycling tank valve pit located in Part D
2. Precision Valley Development Corporation (PVDC) shall conduct on-site activities in accordance with the conditions of this Approval and the Notification.
3. In the event that the activities described in the Notification differ from the conditions specified in this Approval, the conditions of this Approval shall govern.
4. The terms and abbreviations used herein shall have the meanings as defined in 40 CFR § 761.3 unless otherwise defined within this Approval.
5. PVDC must comply with all applicable federal, state and local regulations in the storage, handling, and disposal of all PCB wastes, including PCBs, PCB Items and decontamination wastes generated under this Approval. In the event of a new spill during response actions, PVDC shall contact EPA within twenty-four (24) hours for direction on sampling and cleanup requirements.
6. PVDC is responsible for the actions of all officers, employees, agents, contractors, subcontractors, and others who are involved in activities conducted under this Approval. If at any time PVDC has or receives information indicating that PVDC or any other person has failed, or may have failed, to comply with any provision of this Approval, it must report the information to EPA in writing within twenty-four (24) hours of having or receiving the information.

7. This Approval does not constitute a determination by EPA that the contractors, transporters or disposal facilities selected by PVDC are authorized to conduct the activities set forth in the Notification. PVDC is responsible for ensuring that its selected contractors, transporters and disposal facilities are authorized to conduct these activities in accordance with all applicable federal, state and local statutes and regulations.
8. This Approval does not: 1) waive or compromise EPA's enforcement and regulatory authority; 2) release PVDC from compliance with any applicable requirements of federal, state or local law; or 3) release PVDC from liability for, or otherwise resolve any violations of federal, state or local law.

#### **NOTIFICATION AND CERTIFICATION CONDITIONS**

9. This Approval may be revoked if the EPA does not receive written notification from PVDC of its acceptance of the conditions of this Approval within 10 business days of receipt.
10. PVDC shall notify EPA in writing of the scheduled date of commencement of on-site activities at least 1 business day prior to conducting any work under this Approval.
11. Prior to initiating onsite work under this Approval, PVDC shall submit the following information:
  - a. a certification signed by the selected analytical laboratory, stating that the laboratory has read and understands the analytical and quality assurance requirements specified in the Notification and in this Approval;
  - b. a certification signed by its selected remediation contractor, stating that the contractor has read and understands the Notification, and agrees to abide by the conditions specified in this Approval; and,
  - c. A contractor decontamination work plan, prepared and submitted by the contractor, describing the methods that will be used for removal, decontamination, storage, and disposal of PCB-containing materials, for air monitoring, and for field equipment decontamination. PVDC shall incorporate any changes EPA deems necessary to comply with the conditions of this Approval and the PCB Regulations at 40 CFR Part 761.

#### **ABATEMENT CONDITIONS**

12. The cleanup level for bulk *PCB-remediation wastes* (i.e. soil) shall be less than (<) 10 parts per million (ppm) for a *high occupancy area* cleanup or < 1 ppm for *unrestricted use* in accordance with § 761.61(a)(4).
  - a. Post-cleanup verification sampling for bulk *PCB remediation waste* (i.e. soil) shall be performed on a bulk basis (e.g. mg/Kg). Verification sampling for *PCB remediation waste* shall comply with the procedures and frequencies specified in the Notification. Confirmatory samples shall be collected from both excavation bottoms and sidewalls, as applicable.
  - b. Chemical extraction for PCBs shall be conducted using Methods 3500B/3540C of SW-846; and, chemical analysis for PCBs shall be conducted using Method 8082 of SW-846, unless another extraction/analytical method(s) is validated according to Subpart Q.
13. PCB-contaminated *porous surfaces* (e.g. concrete walls and floors) shall be covered by a barrier as described in the Notification. Initial post-abatement indoor air sampling and indoor surface sampling for PCBs shall be conducted to determine the impact of the abatement activities.
  - a. Initial post-abatement sampling
    - i) Air sampling shall be conducted as described in the Notification. Sufficient sample volumes shall be collected to provide a laboratory reporting limit of less than (<) 0.03 µg/m<sup>3</sup>.
    - ii) Wipe sampling of indoor surfaces shall be performed on a surface area basis by the standard wipe test as specified in 40.CFR § 761.123 (i.e. µg/100 cm<sup>2</sup>). Chemical extraction for PCBs shall be conducted using Methods 3500B/3540C of SW-846 and chemical analysis for PCBs shall be conducted using Method 8082 of SW-846, unless another method(s) is validated according to Subpart Q.
    - iii) Analytical results of the initial surface wipe and air sampling shall be submitted to EPA within 10 business days of PVDC's receipt of the results.
      - (1) In the event that PCB concentrations in the wipe samples are greater than or equal to (≥) 1 µg/100 cm<sup>2</sup> or air sample results are greater than (>) 0.03 µg/m<sup>3</sup>, PVDC shall contact EPA for a determination on what, if any, additional abatement measures and/or information are necessary, which may include development of a site-specific risk exposure assessment.



- b. PVDC shall submit a monitoring and maintenance implementation plan (MMIP) to monitor the long-term effectiveness of the physical barriers in reducing exposure to building users (see Condition 21).
14. PCB waste (at any concentration) generated as a result of the activities described in the Notification, excluding any decontaminated materials, shall be marked in accordance with 40 CFR § 761.40; stored in a manner consistent with 40 CFR § 761.65; and, disposed of in accordance with 40 CFR § 761.61, unless otherwise specified below.
- a. Decontamination wastes and residues shall be disposed of in accordance with 40 CFR § 761.79(g)(6).
  - b. Moveable equipment, tools, and sampling equipment shall be decontaminated in accordance with either 40 CFR § 761.79(b)(3)(i)(A), § 761.79(b)(3)(ii)(A), or § 761.79(c)(2).
  - c. PCB-contaminated water generated during decontamination or dewatering shall be decontaminated in accordance with 40 CFR § 761.79(b)(1) or disposed of under § 761.70.
15. To the maximum extent practical, engineering controls shall be utilized to minimize the potential for PCB releases during the abatement. In addition, to the maximum extent possible, disposable equipment and materials, including PPE, will be used to reduce the amount of decontamination necessary.

#### **DEED RESTRICTION AND USE CONDITIONS**

16. Within thirty (30) days of completing the activities described in the Notification and in the Approval, PVDC shall submit for EPA's review and approval, a draft deed restriction for the Site. The deed restriction shall include: a description of the extent and levels of contamination at the Site following the abatement work; a description of the actions taken at the Site; and, a description of the use restrictions for the Site. Within 30 days of receipt of EPA's approval of the draft deed restriction, PVDC shall record the deed restriction. A copy of this Approval and the long-term monitoring and maintenance implementation plan (see Condition 21) shall be attached to the deed restriction.
17. Prior to occupancy of the Site by a tenant, the Site owner shall submit the following information to EPA:
- a. a certification signed by the tenant acknowledging the PCB contamination at the Site, and the tenant's agreement to inform its employees of the presence of PCBs. The certification also shall specify how the tenant shall provide the information to its employees.

**SALE, LEASE OR TRANSFER OF SITE**

18. PVDC shall notify the EPA of the sale, lease or transfer of any portion of the Site, in writing, no later than 10 days prior to such action. This notification shall include the name, address, and telephone number of the new owner(s). In the event that PVDC sells, leases or transfers any portion of the Site, PVDC shall continue to be bound by all the terms and conditions of this Approval, unless EPA allocates some or all of this Approval's responsibilities to the new owner through the issuance of a new approval associated with those activities. The procedures for the issuance of a new approval are as follows:
    - a. The new owner(s), lessee or transfer entity must request, in writing, that the EPA issue a new approval to the new owner(s), lessee or transfer entity which transfers some or all responsibilities to comply with the terms and conditions of this Approval to that entity or entities;
    - b. The EPA reviews the request, and determines whether to issue a new approval; and,
    - c. The new owner(s), lessee or transfer entity provides written notification to the EPA of its acceptance of and intention to comply with the terms and conditions of the new approval. The new approval may be withdrawn if the EPA does not receive written notification from the new owner(s), lessee or transfer entity of its acceptance of, and intention to comply with, the terms and conditions of the new approval within ten (10) days of the date of the new approval. Under such circumstances, all terms and conditions of this Approval will continue to be binding on PVDC.
  19. In the event that the sale, lease or transfer of the Site will involve or result in a change in the use of the Site, EPA may revoke, suspend, and/or modify this Approval or the new approval if it finds, due to the change in use, that the measures implemented under this Approval will not be protective of public health or the environment. The new owner shall record any amendment to the deed restriction, resulting from any approved modification(s), within sixty (60) days of such change(s).
  20. In any sale, lease or transfer of the Site, PVDC shall retain sufficient access rights to enable it to continue to meet its obligations under this Approval, except as provided above.
-

**INSPECTION, MONITORING, MODIFICATION AND REVOCATION CONDITIONS**

21. Within sixty (60) days of receipt of this Approval, PVDC shall submit for EPA's review and approval, a detailed long-term monitoring and maintenance implementation plan (MMIP) for the barrier(s) and for indoor air quality and surface monitoring.
  - a. The MMIP shall include: a description of the activities that will be conducted, including barrier inspection criteria and frequency; and, indoor air quality monitoring and surface sampling locations; sampling protocols, sampling frequency, and analytical criteria, including laboratory reporting limits; surface wipe and air action levels; corrective action contingencies; and, reporting requirements.
  - b. The MMIP shall include a communications component which details how the maintenance and monitoring results will be communicated to the Site tenants.
  - c. PVDC shall submit the results of these long-term monitoring and maintenance activities to EPA. Based on its review of the results, EPA may determine that modification to the MMIP is necessary in order insure long-term effectiveness of the physical barriers.
  - d. PVDC shall incorporate any changes to the MMIP required by EPA. Activities required under the MMIP shall be conducted until such time that EPA determines, in writing, that such activities are no longer necessary.
  - e. At the completion of the cleanup activities authorized under this Approval, PVDC may consolidate all MMIPs into one comprehensive MMIP for its entire facility.
22. Any modification(s) in the plan, specifications, or information submitted by PVDC, contained in the Notification, and forming the basis upon which this Approval has been issued, must receive prior written approval from the EPA. PVDC shall inform the EPA of any modification, in writing, at least 10 days prior to such change. No action may be taken to implement any such modification unless the EPA has approved of the modification in writing. The EPA may request additional information in order to determine whether to approve the modification.

If such modification involves a change in the use of the Site which results in exposures not considered in the Notification, the EPA may revoke, suspend, and/or modify this Approval upon finding that this cleanup and disposal action may pose an unreasonable risk of injury to health or the environment due to the change in use. EPA may take similar action if the EPA does not receive requested information from PVDC needed to make a determination regarding potential risk.

---

23. Any departure from the conditions of this Approval without prior, written authorization from the EPA may result in the revocation, suspension and/or modification of the Approval, in addition to any other legal or equitable relief or remedy the EPA may choose to pursue.
24. Any misrepresentation or omission of any material fact in the Notification or in any future records or reports may result in the EPA's revocation, suspension and/or modification of the Approval, in addition to any other legal or equitable relief or remedy the EPA may choose to pursue.
25. Approval for these activities may be revoked, modified or otherwise altered: if EPA finds a violation of the conditions of this Approval or of 40 CFR Part 761, including EPA's PCB Spill Cleanup Policy, or other applicable rules and regulations; if EPA finds that these activities present an unreasonable risk to public health or the environment; or if EPA finds that changes are necessary to comply with new rules, standards, or guidance for such approvals. PVDC may apply for appropriate modifications in the event new rules, standards, or guidance come into effect.
26. PVDC shall allow any authorized representative of the Administrator of the EPA to inspect the Site and to inspect records and take samples as may be necessary to determine compliance with the PCB regulations and this Approval. Any refusal to allow such an inspection (as authorized by Section 11 of TSCA) shall be grounds for revocation of this Approval.

#### **RECORDKEEPING AND REPORTING CONDITIONS**

27. PVDC shall prepare and maintain all records and documents required by 40 CFR Part 761, including, but not limited to, the records required by Subparts J and K. PVDC shall maintain a written record of and the analytical sampling for the activities conducted under this Approval. All records shall be made available for inspection by authorized representatives of the EPA, until such time as EPA approves in writing a request for an alternative disposition of such records.
28. PVDC shall submit a Final Completion Report (Report) to the EPA within 120 days of completion of the activities described under this Approval. At a minimum, this Report shall include: a discussion of the project activities; characterization and verification sampling analytical results; copies of the accompanying analytical chains of custody; field and laboratory quality control/quality assurance checks; an estimate of the quantity of PCBs removed and disposed off-site; copies of manifests; and, copies of certificates of disposal or similar certifications issued by the disposer, if applicable. The Report shall also include a copy of the recorded deed restriction and a certification signed by PVDC and the Site owner (if applicable) verifying that the authorized activities have been implemented in accordance with this Approval and the Notification.

29. As required under Condition 21 of this Approval and unless otherwise modified, PVDC shall submit the results of the long-term monitoring and maintenance activities to EPA as specified in the final MMIP to be approved by EPA.
30. Required submittals shall be mailed to:  
  
Kimberly N. Tisa, PCB Coordinator  
United States Environmental Protection Agency  
5 Post Office Square, Suite 100 (OSRR07-2)  
Boston, Massachusetts 02109-3912  
Telephone: (617) 918-1527  
Facsimile: (617) 918-0527
31. No record, report or communication required under this Approval shall qualify as a self-audit or voluntary disclosure under EPA audit, self disclosure or penalty policies.

\*\*\*\*\*

END OF ATTACHMENT 1

---



**FILE COPY**



**UNITED STATES ENVIRONMENTAL PROTECTION AGENCY**

REGION I  
5 POST OFFICE SQUARE, SUITE 100  
BOSTON, MASSACHUSETTS 02109-3912

December 12, 2011

One Hundred River Street, LLC  
Attn: John Meekin  
One Hundred River Street  
Springfield, Vermont 05156

Re: Modification to October 13, 2010 Risk-Based Disposal Approval under § 761.61(c)  
Former Fellows Gear Shaper Facility  
Springfield, Vermont

Dear Mr. Meekin:

This is in response to your October 21, 2011 request for modification to a plan to address PCB contamination at the One Hundred River Street property (the Site) formerly known as the Fellows Gear Shaper Facility. On October 13, 2010 EPA issued a *PCB Risk-Based Disposal Approval under § 761.61(c)* (hereinafter "the Approval") to the Precision Valley Development Corporation (PVDC) and One Hundred River Street, LLC. One Hundred River Street, LLC is proposing a modification to the PCB cleanup plan, which is being submitted pursuant to Condition 22 of the Approval. This request was submitted on behalf of One Hundred River Street, LLC by Stone Environmental, Inc.

One Hundred River Street, LLC is proposing to use two (2) layers of epoxy paint on the PCB-contaminated concrete floor of the Part D and Part F indoor parking areas in lieu of installation of 2 inches of asphalt. In its request, One Hundred River Street, LLC indicates that this modification is being requested due to maintenance and drainage concerns of an asphalt cover and that a concrete cover could be compromised due to salt. You determined that use of the epoxy coatings would be a better alternative given these concerns.

Based on the information provided and the fact that this represents a substantive change in the plan, EPA is approving the modification request with the following conditions:

1. Unless otherwise modified by this letter, all terms and conditions specified in October 13, 2010 Approval remain unchanged.
2. One Hundred River Street, LLC must obtain all necessary State and local permits or approvals, as needed, for this modification.

Y900 3.117

2 | Page

3. The long-term monitoring and maintenance plan (MMIP) required under Condition 21 of the Approval must include both visual inspections and a surface sampling contingency for the encapsulated surfaces to monitor the effectiveness of the epoxy coatings. The MMIP should also include any additional measures, such as cleaning, to reduce potential wear and tear of the surface coatings.
4. Once Hundred River Street, LLC shall establish a financial assurance mechanism for the long-term monitoring and maintenance activities to be conducted under the final MMIP to be approved by EPA and the Vermont Department of Environmental Conservation (VT DEC). The financial assurance mechanism shall be established in accordance with 40 CFR §§ 264.144 and 264.145 or an alternative financial mechanism approved by EPA. Within 60 days of receipt of EPA's and VT DEC's approval of the final MMIP, One Hundred River Street, LLC shall provide written notice to EPA and VT DEC of the establishment of such financial assurance mechanism.
5. Within 30 days of receipt of this modification approval, One Hundred River Street, LLC shall review all conditions specified in its Approval and in previously issued PCB approvals for this property (together "all approvals") to insure that all documents, including notifications and certifications, required under all approvals have been submitted.

As the date of this letter, EPA has not received the following submittals which were required under the Approval:

1. Request by One Hundred River Street, LLC for transfer of the Approval from PVDC (see Approval Condition 18) to One Hundred River Street, LLC as a single entity; and,
2. MMIP (see Approval Condition 21).

Please be aware that in addition to the above submittals, the following submittals remain outstanding for previously issued approvals:

1. The final MMIP for the chip shed area that was required under the *October 13, 2009 PCB Cleanup and Disposal Approval under 40 CFR §§ 761.61(a) and (c)* (see Condition 19 of this approval)
2. Annual monitoring results for the Part B area required under the May 2009 MMIP for the Part B (manufacturing and loading dock) area (see Condition 19 of the *March 30, 2009 PCB Risk-Based Disposal Approval under 40 CFR § 761.61(c)*)

Given that numerous MMIPs are required for this property and that two remain outstanding, One Hundred River Street, LLC may submit one comprehensive MMIP to address all long-term monitoring and maintenance requirements for the entire property. This comprehensive MMIP shall be supported by a financial assurance mechanism(s) established in accordance with 40 CFR §§ 264.144 and 264.145 or an alternative financial mechanism approved by EPA.

3 | Page

EPA is reserving its rights to require additional mitigation methods, including construction of an asphalt or concrete surface cover, should the results of the inspections or long-term monitoring sampling indicate that the epoxy coatings are not an effective barrier and/or are not being maintained such that there is no unreasonable risk to public health or the environment.

Should you have any questions, please call Kimberly Tisa in this office at (617) 918-1527.

Sincerely,



Mary Sanderson, Branch Chief  
Remediation & Restoration II Branch  
Office of Site Remediation & Restoration

cc: D. Voisin, Stone  
B. Flint, PVDC  
A. Peterson, EPA Brownfields  
T. Coppolino, VT DEC  
File

\*\*\*\*\*

END OF ATTACHMENT 1

**100 RIVER STREET VENTURE, LLC**

100 River Street  
Springfield, VT 05156

June 5, 2026

Katherine Woodward  
PCB Coordinator  
US Environmental Protection Agency, Region 1  
5 Post Office Square, Suite 100  
Boston, MA 02109  
Woodward.katherine@epa.gov

**Subject: Request for New PCB Disposal Approval due to Property Ownership Transfer –  
100 River Street, Springfield, Vermont**

Dear Katherine,

Pursuant to the requirements set forth in Condition 18 of the October 13, 2010 letter titled "PCB Risk-Based Disposal Approval under 40 CFR 761.61(c)", this letter intends to notify you of the transfer of title of the 100 River Street property to 100 River Street Venture, LLC from One Hundred River Street, LLC. As the current owners, we accept the responsibility to comply with all the terms and conditions of the Approvals.

Sincerely,

Matthew Fistonich  
Matthew Fistonich  
Managing Member  
100 River Street Venture, LLC

**ONE HUNDRED RIVER STREET, LLC**

100 River Street  
Springfield, VT 05156

June 2, 2026

Katherine Woodward  
PCB Coordinator  
US Environmental Protection Agency, Region 1  
5 Post Office Square, Suite 100  
Boston, MA 02109  
Woodward.katherine@epa.gov

**Subject: Request for New PCB Disposal Approval due to Property Ownership Transfer –  
100 River Street, Springfield, Vermont**

Dear Katherine,

Pursuant to the requirements set forth in Condition 18 of the October 31, 2010 letter titled "PCB Risk-Based Disposal Approval under 40 CFR 761.61(c)", this letter intends to notify you of the transfer of title of the 100 River Street property to 100 River Street Ventures, LLC from One Hundred River Street, LLC. The new owner has accepted the responsibility to comply with all terms and conditions of the Approvals.

Sincerely,

  
Richard Genderson  
Managing Member  
One Hundred River Street, LLC



535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com

February 3, 2026

Katherine Woodward  
US EPA Region 1 TSCA Coordinator  
5 Post Office Square, Suite 100  
Boston, MA 02109-3912  
Via Email: [Woodward.Katherine@epa.gov](mailto:Woodward.Katherine@epa.gov)

Stone Project No. 20231131  
Subject: Addendum 3 to former Fellows Gear Shaper facility TSCA Cleanup Notification, 100 River Street, Springfield, Vermont

Dear Katherine,

On behalf of ICP Springfield SPE, LLC, Stone Environmental, Inc. (Stone) has prepared the following letter presenting alterations to the remedial method at the former Fellows Gear Shaper property located at 100 River Street in Springfield, Vermont (the Site or Property). This letter serves as Addendum 3 to the letter prepared by the Johnson Company titled "Notification of Self-Implementing PCB Cleanup, Remainder of PVDC Building and Property, 100 River Street, Springfield, Vermont" dated April 28, 2010 (the Notification).

The previously accepted remedial approach included installing two coats of contracting color epoxy paint over walls and columns in all impacted areas. The proposed alterations to the remedial method for yet-to-be-remediated areas include the use of a physical barrier in tandem with epoxy paint encapsulation to mitigate unacceptable risk to human health posed by PCBs present on interior building walls. The physical barrier design will consist of a minimum 6-mil polyethylene vapor barrier sealed over PCB impacted masonry walls and steel support columns. The vapor barrier will be protected by a false wall consisting of a metal stud wall and wall board to be taped, spackled, primed, and painted with two coats of interior latex paint. Example drawings of the designs are included as attachments. The drywall barrier design will tend to be installed over large wide-open walls and the epoxy paint encapsulation will be installed where drywall barrier construction is challenging, such as around windows. Additionally, the contractor may consider impacts of the mitigation design to potential future use of the space when selecting which to use. The final location of drywall barrier versus epoxy paint encapsulation will be recorded in the field and documented in the completion report. Proposed uses of the space remain unchanged and post-installation confirmation testing will remain the same as previously approved.

In addition to the proposed change in remedial method, this letter also provides notification that the owner of the Property has changed from 100 River Street, LLC to 100 River Street Venture, LLC. We request that EPA issue a new approval which transfers all responsibilities to comply with the terms and conditions of the Approvals to the new owner. The proposed redevelopment and use of the property have not changed from




the previous notification except as described in the Addendum above. The new owner may be contacted at the following address:

100 River Street Venture, LLC  
c/o Matt Fistonich  
4438 Ingrahm Street  
PMB 216  
San Diego, CA 92109

And via phone by contacting Mark Ellenbogen at 609-828-0751.

Upon receipt of the new approval, 100 River Street Venture will provide written notification to EPA TSCA of its acceptance of and intention to comply with the terms and conditions of the new approval.

Sincerely,





David Jensen, PE (MA, VT)  
Project Engineer  
Mobile / 802.318.7828  
Email / [djensen@stone-env.com](mailto:djensen@stone-env.com)

O:\PROJECTS\2012\1121 100 River Street\Project Reports\Dir\03\_TSCA Notification Addendum\TSCA Notification Addendum 3.doc

Attachments:

Figure 1: Physical Barrier - Wall Detail

Figure 2: Physical Barrier - Column Detail

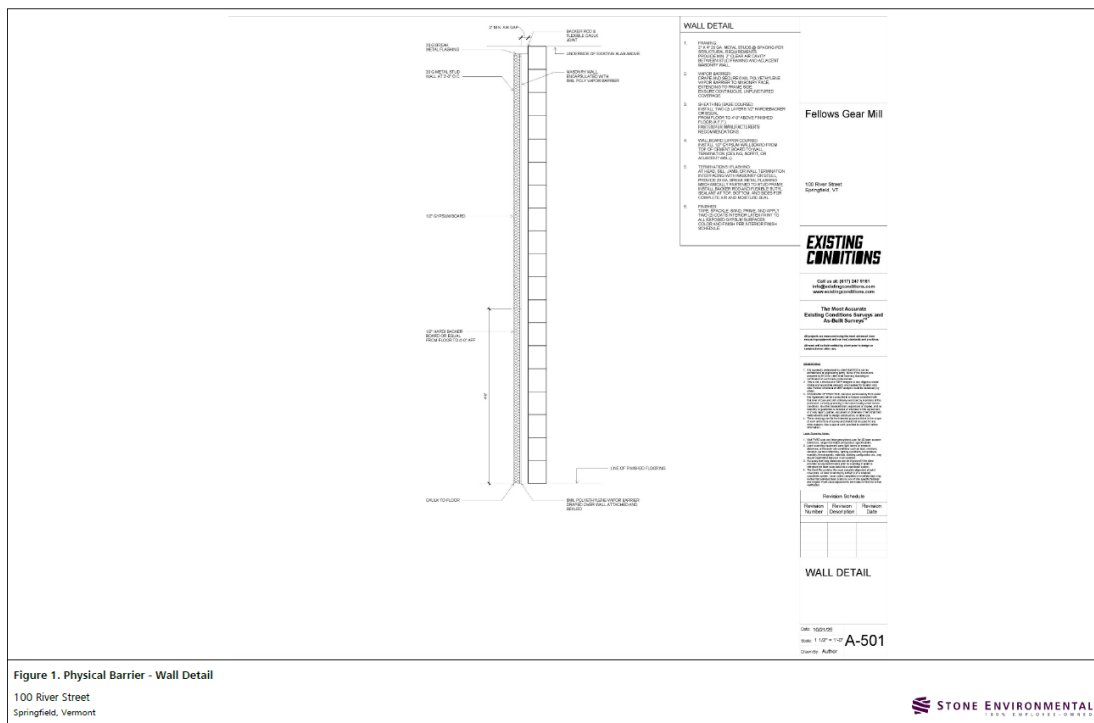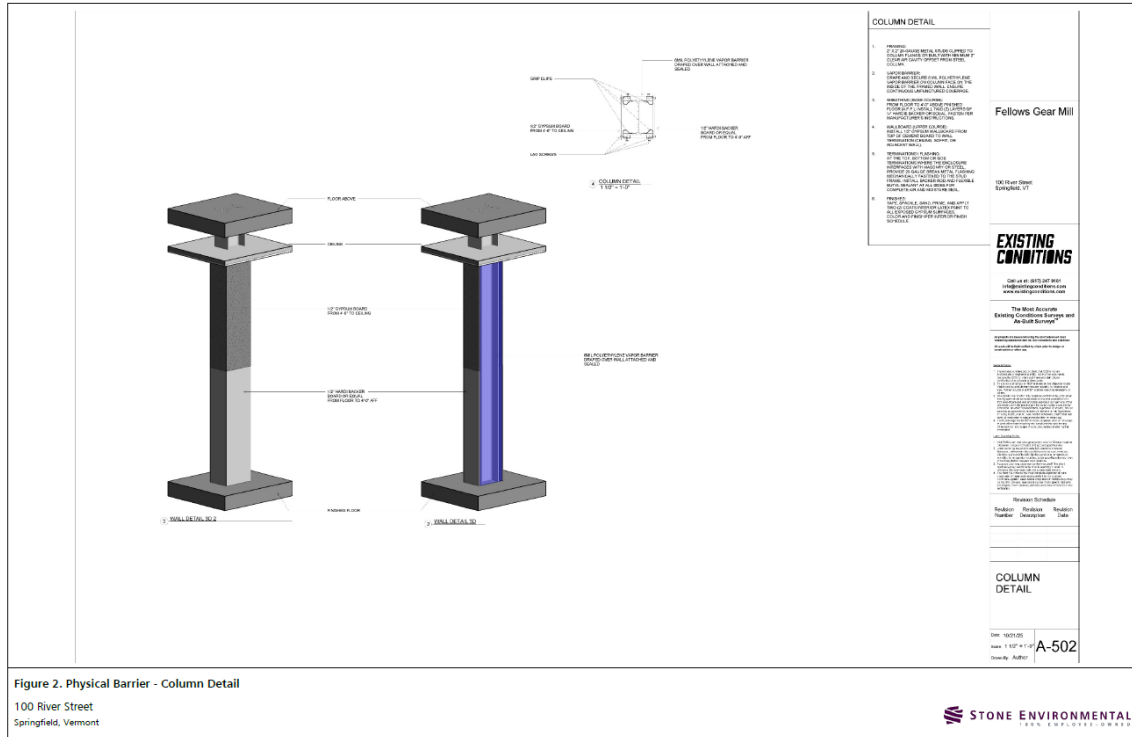

**\*END ATTACHMENTS\***

---

## Appendix C: CAP Implementation Status Table

---

**Corrective Action Status by Room**  
100 River Street, Springfield, VT  
(SMS# 97-2235)

| Floor          | Room Assignment                    | Status<br>(December 2025)                                           | CAP Requirements                                                                                                                                                                                                                                                                                                                 | Remaining Corrective Actions - Scope of Work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | O&M Requirements <sup>1</sup>                                                                                                                                                                                                                                                           |
|----------------|------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ground         | Room E1                            | Incomplete                                                          | <ul style="list-style-type: none"> <li>Section off hallways and eastern portion from main machine shop and transformer room</li> <li>Install 4-inch concrete cap with vapor barrier</li> <li>Paint walls and columns with 2 coats of epoxy paint or encapsulate with vapor barrier and gypsum board physical barrier.</li> </ul> | <ul style="list-style-type: none"> <li>Stabilize walls and columns <ul style="list-style-type: none"> <li>Cover concrete cap floor with poly sheeting</li> <li>If painting: Stabilize paint by scraping to refusal in lead-safe manner</li> <li>If physical barrier: Remove any large loose paint flakes in lead-safe manner</li> <li>When finished dispose of poly sheeting as PCB remediation waste</li> </ul> </li> <li>Encapsulate walls and columns <ul style="list-style-type: none"> <li>If painting: Prime and apply two coats of epoxy paint to walls</li> <li>If physical barrier: install aluminum frame, min. 6-mil poly sheeting vapor barrier, min. 1/2" gypsum board and finish with latex paint.</li> </ul> </li> <li>Conduct confirmation sampling</li> <li>Complete O&amp;M requirements including these observed repairs: <ul style="list-style-type: none"> <li>Repair concrete cap <ul style="list-style-type: none"> <li>Seal cracks in slab with joint filler</li> <li>Grind joint filler flush with slab after it has cured</li> </ul> </li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted and physical barrier wall surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul> |
| Ground         | Room E2                            | Complete - O&M Only                                                 |                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>None - Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                         |
| Ground         | Room E3                            | Complete - O&M Only                                                 |                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>None - Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                         |
| Ground         | Room E4                            | Complete - O&M Only                                                 |                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>None - Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                         |
| Ground         | Room E4 to F1                      | Complete - O&M Only<br>(protective barriers need immediate repairs) | <ul style="list-style-type: none"> <li>Paint floor and walls with 2 coats of epoxy paint</li> </ul>                                                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Complete O&amp;M requirements including these observed repairs: <ul style="list-style-type: none"> <li>Repair floor paint: <ul style="list-style-type: none"> <li>Cover other surfaces with poly sheeting</li> <li>Stabilize paint by scraping to refusal in lead-safe manner</li> <li>Prime and apply 1 or 2 coats of epoxy paint to floor where needed</li> </ul> </li> <li>Dispose of poly sheeting as PCB remediation waste if bottom paint coat was removed during scraping</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <ul style="list-style-type: none"> <li>Painted wall and floor surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul>                                                                  |
| Ground & First | Freight Elevator<br>(Part E & NLD) | Incomplete                                                          | <ul style="list-style-type: none"> <li>Drain hydraulic fluids from elevator components</li> <li>Seal elevator access</li> </ul>                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>Drain elevator gearbox and other associated vessels containing free liquids and dispose of fluid as PCB remediation waste</li> <li>Wall up and seal elevator access on first and second floor using concrete masonry blocks</li> <li>Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <ul style="list-style-type: none"> <li>Inspection and maintenance of sealed access ways to elevator</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul>                                                                                                      |
| Ground         | Room T2                            | Incomplete                                                          | <ul style="list-style-type: none"> <li>Abandon underground vault</li> <li>Wall up access to the room</li> <li>Apply waterproof seal to exterior wall to reduce groundwater/stormwater infiltration</li> </ul>                                                                                                                    | <ul style="list-style-type: none"> <li>Abandon underground vault: <ul style="list-style-type: none"> <li>Pump vault dry and contain contents in 350-gallon totes or drums</li> <li>Fill vault with concrete</li> <li>Sample vault contents for waste characterization and appropriately dispose of off-site based on the sample results</li> </ul> </li> <li>Wall up and seal eastern door using concrete masonry blocks</li> <li>Seal southern door using lockable mandoor</li> <li>Apply water sealant to foundation wall inside transformer room</li> <li>Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>Inspection and maintenance of walls, locked door, and signage</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul>                                                                                                     |
| Ground & First | Parking F1/D1                      | Complete - O&M Only<br>(protective barriers need immediate repairs) | <ul style="list-style-type: none"> <li>Demolish southeastern portion of the garage</li> <li>Install asphalt cap</li> <li>Paint walls with 2 coats of epoxy paint</li> </ul>                                                                                                                                                      | <ul style="list-style-type: none"> <li>Complete O&amp;M requirements including these observed repairs: <ul style="list-style-type: none"> <li>Repair wall paint: <ul style="list-style-type: none"> <li>Cover existing cap and nearby equipment with poly sheeting</li> <li>Stabilize paint by scraping to refusal in lead-safe manner</li> <li>Prime and apply 1 or 2 coats of epoxy paint to walls where needed</li> </ul> </li> <li>Dispose of poly sheeting as PCB remediation waste if bottom paint coat was removed during scraping</li> <li>Repair asphalt cap with new hot asphalt patch</li> </ul> </li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <ul style="list-style-type: none"> <li>Asphalt surface inspection and maintenance</li> <li>Painted wall surfaces inspection and maintenance</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul>                                                              |



**Corrective Action Status by Room**  
100 River Street, Springfield, VT  
(SMS# 97-2235)

| Floor | Room Assignment            | Status<br>(December 2025)                                           | CAP Requirements                                                                                                                                                                                                                                                                                                                                 | Remaining Corrective Actions - Scope of Work                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | O&M Requirements <sup>1</sup>                                                                                                                                                                                                                                                           |
|-------|----------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| First | Room B1                    | Complete - O&M Only<br>(protective barriers need immediate repairs) | <ul style="list-style-type: none"> <li>Construct interior wall to divide space in two (B1 &amp; B2)</li> <li>Install 4-inch concrete cap with vapor barrier</li> <li>Paint walls with 2 coats of epoxy paint</li> </ul>                                                                                                                          | <ul style="list-style-type: none"> <li>Complete O&amp;M requirements and including these observed repairs:               <ul style="list-style-type: none"> <li>Repair wall paint:                   <ul style="list-style-type: none"> <li>Cover existing cap and nearby equipment with poly sheeting</li> <li>Stabilize paint by scraping to refusal in lead-safe manner</li> </ul> </li> <li>Prime and apply 1 or 2 coats of epoxy paint to walls where needed</li> <li>Dispose of poly sheeting as PCB remediation waste if bottom paint coat was removed during scraping</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted wall surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul>                      |
| First | Room B2                    | Complete - O&M Only                                                 |                                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>None - Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                         |
| First | Room C1                    | Incomplete                                                          | <ul style="list-style-type: none"> <li>Construct wall to divide the space into two sections (Room C1 and portion included in J1-see below).</li> <li>Install 4-inch concrete cap with vapor barrier</li> <li>Paint walls and columns with 2 coats of epoxy paint or encapsulate with vapor barrier and gypsum board physical barrier.</li> </ul> | <ul style="list-style-type: none"> <li>Stabilize walls and columns and encapsulate with paint or physical barrier (see E1)</li> <li>Conduct confirmation sampling</li> <li>Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted and physical barrier wall surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul> |
| First | Room G1<br>(Great Hall)    | Complete - O&M Only<br>(protective barriers need immediate repairs) | <ul style="list-style-type: none"> <li>Install 4-inch concrete cap with vapor barrier</li> <li>Paint walls with 2 coats of epoxy paint</li> </ul>                                                                                                                                                                                                | <ul style="list-style-type: none"> <li>Complete O&amp;M requirements including these observed repairs:               <ul style="list-style-type: none"> <li>Repair concrete cap:                   <ul style="list-style-type: none"> <li>Seal cracks with joint filler</li> <li>Grind joint filler flush with slab after it has cured</li> </ul> </li> </ul> </li> </ul>                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted wall surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul>                      |
| First | Room H1                    | Incomplete                                                          | <ul style="list-style-type: none"> <li>Construct divider walls to section off into 4 spaces.</li> <li>Install 4-inch concrete cap with vapor barrier</li> <li>Paint walls and columns with 2 coats of epoxy paint or encapsulate with vapor barrier and gypsum board physical barrier.</li> </ul>                                                | <ul style="list-style-type: none"> <li>Stabilize walls and columns and encapsulate with paint or physical barrier (see E1)</li> <li>Pour 4-inch concrete cap with vapor barrier</li> <li>Conduct confirmation sampling</li> <li>Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted and physical barrier wall surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul> |
| First | Room H2                    | Incomplete                                                          |                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                         |
| First | Room H3                    | Incomplete                                                          |                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                         |
| First | Pharmacy                   | Complete - O&M Only                                                 |                                                                                                                                                                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>None - Complete O&amp;M requirements.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                         |
| First | Room J1                    | Incomplete                                                          | <ul style="list-style-type: none"> <li>Install 4-inch concrete cap with vapor barrier (except for portion of Part C now included in Room J1)</li> <li>Paint walls and columns with 2 coats of epoxy paint or encapsulate with vapor barrier and gypsum board physical barrier.</li> </ul>                                                        | <ul style="list-style-type: none"> <li>Stabilize walls and columns and encapsulate with paint or physical barrier (see E1)</li> <li>Pour 4-inch concrete cap with vapor barrier except for portion near Part C where concrete cap was already installed</li> <li>Conduct confirmation sampling</li> <li>Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                     | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted and physical barrier wall surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul> |
| First | Room LMN1                  | Complete - O&M Only                                                 | <ul style="list-style-type: none"> <li>Install 4-inch concrete cap with vapor barrier</li> <li>Paint walls with 2 coats of epoxy paint</li> </ul>                                                                                                                                                                                                | <ul style="list-style-type: none"> <li>None - Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted wall surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul>                      |
| First | Room LMN2                  |                                                                     |                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                         |
| First | Medical Offices (Part LMN) | N/A                                                                 | <ul style="list-style-type: none"> <li>No corrective actions required</li> </ul>                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"> <li>N/A</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <ul style="list-style-type: none"> <li>N/A</li> </ul>                                                                                                                                                                                                                                   |
| First | Room NLD1                  | Incomplete                                                          | <ul style="list-style-type: none"> <li>Install 4-inch concrete cap with vapor barrier</li> <li>Paint walls and columns with 2 coats of epoxy paint or encapsulate with vapor barrier and gypsum board physical barrier.</li> <li>Abandon supply well</li> </ul>                                                                                  | <ul style="list-style-type: none"> <li>Hire licensed driller to abandon the supply well</li> <li>Stabilize walls and columns and encapsulate with paint or physical barrier (see E1)</li> <li>Pour 4-inch concrete cap with vapor barrier</li> <li>Conduct confirmation sampling</li> <li>Complete O&amp;M requirements</li> </ul>                                                                                                                                                                                                                                                                   | <ul style="list-style-type: none"> <li>Concrete surfaces inspection and maintenance</li> <li>Painted wall and physical barrier surfaces inspection and maintenance</li> <li>Indoor air sampling for PCBs</li> <li>Document findings and repairs on appropriate forms of MMIP</li> </ul> |

**Corrective Action Status by Room**  
100 River Street, Springfield, VT  
(SMS# 97-2235)

| Floor  | Room Assignment               | Status<br>(December 2025) | CAP Requirements                                                                                                                                               | Remaining Corrective Actions - Scope of Work                                             | O&M Requirements <sup>1</sup>                                                                                                                                                                                                                                              |
|--------|-------------------------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ground | Springfield Medical Center    | Complete - O&M Only       | <ul style="list-style-type: none"> <li>• Install sub-slab depressurization system</li> </ul>                                                                   | <ul style="list-style-type: none"> <li>• None - Complete O&amp;M requirements</li> </ul> | <ul style="list-style-type: none"> <li>• Collect system performance parameters</li> <li>• Indoor air sampling for VOCs</li> <li>• Document findings and repairs on appropriate forms of MMIP</li> </ul>                                                                    |
| Ground | Hallways and mechanical rooms | Complete - O&M Only       | <ul style="list-style-type: none"> <li>• Install 4-inch concrete cap with vapor barrier</li> <li>• Paint walls with 2 coats of epoxy paint</li> </ul>          | <ul style="list-style-type: none"> <li>• None - Complete O&amp;M requirements</li> </ul> | <ul style="list-style-type: none"> <li>• Concrete surfaces inspection and maintenance</li> <li>• Painted wall surfaces inspection and maintenance</li> <li>• Indoor air sampling for PCBs</li> <li>• Document findings and repairs on appropriate forms of MMIP</li> </ul> |
| First  | Hallways                      | Complete - O&M Only       | <ul style="list-style-type: none"> <li>• Install 4-inch concrete cap with vapor barrier</li> <li>• Paint exterior walls with 2 coats of epoxy paint</li> </ul> | <ul style="list-style-type: none"> <li>• None - Complete O&amp;M requirements</li> </ul> | <ul style="list-style-type: none"> <li>• Concrete surfaces inspection and maintenance</li> <li>• Painted wall surfaces inspection and maintenance</li> <li>• Indoor air sampling for PCBs</li> <li>• Document findings and repairs on appropriate forms of MMIP</li> </ul> |

*Notes:*

1. O&M Requirements detailed in Long-Term Monitoring and Maintenance Implementation Plan (MMIP) for Risk-Based PCB Cleanup (Stone, 2012)

---

## Appendix D: Data Tables

---

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

## Concrete Analytical Data - PCBs

PVDC Building

100 River Street

Springfield, Vermont

| Location                                                                     | Depth  | Date      | PCB-1016 | PCB-1221 | PCB-1232 | PCB-1242 | PCB-1248 | PCB-1254 | PCB-1260 | PCB-1262 | PCB-1268 | Total PCBs |   |       |   |      |   |      |       |
|------------------------------------------------------------------------------|--------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|------------|---|-------|---|------|---|------|-------|
| CONCRETE- mg/kg (ppm)                                                        |        |           |          |          |          |          |          |          |          |          |          |            |   |       |   |      |   |      |       |
| Boiler Room (Concentration >1 ppm bold; >25 ppm <i>bold italics</i> )        |        |           |          |          |          |          |          |          |          |          |          |            |   |       |   |      |   |      |       |
| Boiler E                                                                     | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | *          |   | *     | U | 0.33 | U | 0.33 | 0.66  |
| Boiler-Mid                                                                   | 0-0.5" | 8/25/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | *          |   | *     | U | 0.33 | U | 0.33 | 1.4   |
| Boiler-W                                                                     | 0-0.5" | 8/25/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | *          |   | *     | U | 0.32 | U | 0.32 | 0.8   |
| T1 Electrical Room (Concentration >1 ppm bold; >25 ppm <i>bold italics</i> ) |        |           |          |          |          |          |          |          |          |          |          |            |   |       |   |      |   |      |       |
| T1-F-01                                                                      | 0-0.5" | 7/3/2008  | U        | 1.00     | U        | 1.00     | U        | 1.00     | U        | 1.00     | U        | 1.00       |   | 2.51  |   |      | U | 1.00 | 2.51  |
| T1-F-02                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10       |   | 0.1   |   |      | U | 0.10 | 0.1   |
| T1-F-03                                                                      | 0-0.5" | 7/3/2008  | U        | 10       | U        | 10       | U        | 10       | U        | 10       | U        | 10         |   | 88.8  |   |      | U | 10   | 88.8  |
| T1-F-04                                                                      | 0-0.5" | 7/3/2008  | U        | 2.00     | U        | 2.00     | U        | 2.00     | U        | 2.00     | U        | 2.00       |   | 9.35  |   |      | U | 2.00 | 9.35  |
| T1-F-05                                                                      | 0-0.5" | 7/3/2008  | U        | 0.50     | U        | 0.50     | U        | 0.50     | U        | 0.50     | U        | 0.50       |   | 1.8   |   |      | U | 0.50 | 1.8   |
| T1-F-06                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10       |   | 1.08  |   |      | U | 0.10 | 1.08  |
| T1-W-01                                                                      | 0-0.5" | 7/3/2008  | U        | 0.50     | U        | 0.50     | U        | 0.50     | U        | 0.50     | U        | 0.50       |   | 1.11  |   |      | U | 0.50 | 1.11  |
| T1-W-02                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10       |   | 0.1   |   |      | U | 0.10 | 0.1   |
| T1-W-03                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10       |   | 0.131 |   |      | U | 0.10 | 0.131 |
| T1-W-04                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10       |   | 0.1   |   |      | U | 0.10 | 0.1   |
| T1-W-05                                                                      | 0-0.5" | 7/3/2008  | U        | 2.00     | U        | 2.00     | U        | 2.00     | U        | 2.00     | U        | 2.00       |   | 3.92  |   |      | U | 2.00 | 3.92  |
| T1-W-06                                                                      | 0-0.5" | 7/3/2008  | U        | 10       | U        | 10       | U        | 10       | U        | 10       | U        | 10         |   | 54.9  |   |      | U | 10   | 54.9  |
| T1-W-07                                                                      | 0-0.5" | 7/3/2008  | U        | 10       | U        | 10       | U        | 10       | U        | 10       | U        | 10         |   | 48.2  |   |      | U | 10   | 48.2  |
| T1-W-08                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10       |   | 0.1   |   |      | U | 0.10 | 0.1   |
| T1-W-09                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     |          | 0.338      | U | 0.191 |   |      | U | 0.10 | 0.338 |
| T1-W-10                                                                      | 0-0.5" | 7/3/2008  | U        | 0.10     | U        | 0.10     | U        | 0.10     | U        | 0.10     |          | 0.10       |   | 0.1   |   |      | U | 0.10 | 0.2   |
| Chip Shed Bay 1 (Concentration >1 ppm bold; >25 ppm <i>bold italics</i> )    |        |           |          |          |          |          |          |          |          |          |          |            |   |       |   |      |   |      |       |
| CS-Bay1-F1                                                                   | 0-0.5" | 8/26/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | *          |   | *     | U | 0.32 | U | 0.32 | 0.82  |
| CS-Bay1-F2                                                                   | 0-0.5" | 8/26/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | *          |   | *     | U | 0.32 | U | 0.32 | 2.1   |
| CS-Bay1-UF1                                                                  | 0-0.5" | 8/26/2008 | U        | 9.6      | U        | 9.6      | U        | 9.6      | U        | 9.6      |          | *          |   | *     | U | 9.6  | U | 9.6  | 21    |
| CS-Bay1-W-B1                                                                 | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | U | 0.16  | U | 0.16 | U | 0.16 | 0     |
| CS-Bay1-W-B2                                                                 | 0-0.5" | 8/26/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | *          |   | *     | U | 0.32 | U | 0.32 | 0.47  |
| CS-Bay1-W-B3                                                                 | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | U | 0.16  | U | 0.16 | U | 0.16 | 0     |
| CS-Bay1-W-B4                                                                 | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | *          |   | *     | U | 0.33 | U | 0.33 | 0.67  |
| CS-Bay1-W-B5                                                                 | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33       |   | 0.16  | U | 0.33 | U | 0.33 | 0.16  |
| CS-Bay1-W-U1                                                                 | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33       | U | 0.33  | U | 0.33 | U | 0.33 | 0     |
| CS-Bay1-W-U2                                                                 | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33       | U | 0.33  | U | 0.33 | U | 0.33 | 0     |
| CS-Bay1-W-U3                                                                 | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33       | U | 0.33  | U | 0.33 | U | 0.33 | 0     |
| CS-Bay1-W-U4                                                                 | 0-0.5" | 8/26/2008 | U        | 0.4      | U        | 0.4      | U        | 0.4      | U        | 0.4      | U        | 0.4        | U | 0.4   | U | 0.4  | U | 0.4  | 0     |
| CS-Bay1-W-U5                                                                 | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33       | U | 0.33  | U | 0.33 | U | 0.33 | 0     |
| CS-Bay1-W-U6                                                                 | 0-0.5" | 8/26/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32       | U | 0.32  | U | 0.32 | U | 0.32 | 0     |
| Chip Shed Bay 2 (Concentration >1 ppm bold; >25 ppm <i>bold italics</i> )    |        |           |          |          |          |          |          |          |          |          |          |            |   |       |   |      |   |      |       |
| CS-Bay2-F1                                                                   | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | *          |   | *     | U | 0.33 | U | 0.33 | 1.4   |
| CS-Bay2-F2                                                                   | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | *          |   | *     | U | 0.33 | U | 0.33 | 1     |
| CS-Bay2-UF1                                                                  | 0-0.5" | 8/26/2008 | U        | 9.9      | U        | 9.9      | U        | 9.9      | U        | 9.9      |          | *          |   | *     | U | 9.9  | U | 9.9  | 53    |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-1: Johnson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location                                                          | Depth  | Date      | PCB-1016 |      | PCB-1221 |      | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |      | PCB-1260 |      | PCB-1262 |      | PCB-1268 |      | Total PCBs |  |
|-------------------------------------------------------------------|--------|-----------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|------------|--|
| CONCRETE- mg/kg (ppm)                                             |        |           |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |            |  |
| CS-Bay2-W-B1                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.2        |  |
| CS-Bay2-W-B2                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.7        |  |
| CS-Bay2-W-B3                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.3        |  |
| CS-Bay2-W-B4                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2          |  |
| CS-Bay2-W-B5                                                      | 0-0.5" | 8/26/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 2          |  |
| CS-Bay2-W-U1                                                      | 0-0.5" | 8/25/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.1        |  |
| CS-Bay2-W-U2                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.9        |  |
| CS-Bay2-W-U3                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.85       |  |
| CS-Bay2-W-U4                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.3        |  |
| CS-Bay2-W-U5                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.3        |  |
| CS-Bay2-W-U6                                                      | 0-0.5" | 8/26/2008 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | 0          |  |
| Chip Shed Bay 3 (Concentration >1 ppm bold; >25 ppm bold italics) |        |           |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |            |  |
| CS-Bay3-F1                                                        | 0-0.5" | 8/26/2008 | U        | 1    | U        | 1    | U        | 1    | U        | 1    | U        | 1    |          | *    |          | *    | U        | 1    | U        | 1    | 2.2        |  |
| CS-Bay3-F2                                                        | 0-0.5" | 8/26/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | 10   | U        | 3.3  | U        | 3.3  | U        | 3.3  | 10         |  |
| CS-Bay3-UF1                                                       | 0-0.5" | 8/26/2008 | U        | 8.4  | U        | 8.4  | U        | 8.4  | U        | 8.4  | U        | 8.4  |          | *    |          | *    | U        | 8.4  | U        | 8.4  | 96         |  |
| CS-Bay3-W-B1                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | 2.4      | U    | 0.33     | U    | 0.33     | U    | 0.33     | 2.4  |            |  |
| CS-Bay3-W-B2                                                      | 0-0.5" | 8/26/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        |      | *        | U    | 3.3      | U    | 3.3      | 24   |            |  |
| CS-Bay3-W-B3                                                      | 0-0.5" | 8/26/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | 10       | U    | 3.3      | U    | 3.3      | U    | 3.3      | 10   |            |  |
| CS-Bay3-W-B4                                                      | 0-0.5" | 8/26/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | 11       | U    | 3.3      | U    | 3.3      | U    | 3.3      | 11   |            |  |
| CS-Bay3-W-B5                                                      | 0-0.5" | 8/26/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | 11       | U    | 3.2      | U    | 3.2      | U    | 3.2      | 11   |            |  |
| CS-Bay3-W-U1                                                      | 0-0.5" | 8/26/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | 0.34     | U    | 0.32     | U    | 0.32     | U    | 0.32     | 0.34 |            |  |
| CS-Bay3-W-U2                                                      | 0-0.5" | 8/26/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        |      | *        | U    | 3.3      | U    | 3.3      | 8.5  |            |  |
| CS-Bay3-W-U3                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | 0.51     | U    | 0.33     | U    | 0.33     | U    | 0.33     | 0.51 |            |  |
| CS-Bay3-W-U4                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | 1        | U    | 0.33     | U    | 0.33     | U    | 0.33     | 1    |            |  |
| CS-Bay3-W-U5                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | 1.3      | U    | 0.33     | U    | 0.33     | U    | 0.33     | 1.3  |            |  |
| CS-Bay3-W-U6                                                      | 0-0.5" | 8/26/2008 | U        | 0.4  | U        | 0.4  | U        | 0.4  | U        | 0.4  | U        | 0.4  | U        | 0.4  | U        | 0.4  | U        | 0.4  | U        | 0.4  | 0          |  |
| Chip Shed Bay 4 (Concentration >1 ppm bold; >25 ppm bold italics) |        |           |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |            |  |
| CS-Bay4-F1                                                        | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.58       |  |
| CS-Bay4-F2                                                        | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.53       |  |
| CS-Bay4-Ramp                                                      | 0-0.5" | 8/26/2008 | U        | 0.98 | U        | 0.98 | U        | 0.98 | U        | 0.98 | U        | 0.98 |          | *    |          | *    | U        | 0.98 | U        | 0.98 | 4.7        |  |
| CS-Bay4-UF1                                                       | 0-0.5" | 8/26/2008 | U        | 0.98 | U        | 0.98 | U        | 0.98 | U        | 0.98 | U        | 0.98 |          | *    |          | *    | U        | 0.98 | U        | 0.98 | 2          |  |
| CS-Bay4-W-B1                                                      | 0-0.5" | 8/26/2008 | U        | 0.18 | U        | 0.18 | U        | 0.18 | U        | 0.18 | U        | 0.18 | U        | 0.18 | U        | 0.18 | U        | 0.18 | U        | 0.18 | 0          |  |
| CS-Bay4-W-B2                                                      | 0-0.5" | 8/26/2008 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | 0          |  |
| CS-Bay4-W-B3                                                      | 0-0.5" | 8/26/2008 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | U        | 0.17 | 0          |  |
| CS-Bay4-W-B4                                                      | 0-0.5" | 8/26/2008 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | 0          |  |
| CS-Bay4-W-B5                                                      | 0-0.5" | 8/26/2008 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | U        | 0.16 | 0          |  |
| CS-Bay4-W-U1                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | 0          |  |
| CS-Bay4-W-U2                                                      | 0-0.5" | 8/26/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | 0          |  |
| CS-Bay4-W-U3                                                      | 0-0.5" | 8/26/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | 0          |  |
| CS-Bay4-W-U4                                                      | 0-0.5" | 8/26/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | 0          |  |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location                                                                      | Depth                                    | Date      |   | PCB-1016 |   | PCB-1221 |   | PCB-1232 |   | PCB-1242 |   | PCB-1248 |   | PCB-1254 |   | PCB-1260 |   | PCB-1262 |   | PCB-1268 | Total PCBs |
|-------------------------------------------------------------------------------|------------------------------------------|-----------|---|----------|---|----------|---|----------|---|----------|---|----------|---|----------|---|----------|---|----------|---|----------|------------|
| CONCRETE- mg/kg (ppm)                                                         |                                          |           |   |          |   |          |   |          |   |          |   |          |   |          |   |          |   |          |   |          |            |
| CS-Bay4-W-U5                                                                  | SAMPLE NOT TAKEN BECAUSE CEILING TOO LOW |           |   |          |   |          |   |          |   |          |   |          |   |          |   |          |   |          |   |          |            |
| CS-Bay4-W-U6                                                                  | 0-0.5"                                   | 8/26/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | 0          |
| Machine Shop 2- Upper Level (Concentration >1 ppm bold; >25 ppm bold italics) |                                          |           |   |          |   |          |   |          |   |          |   |          |   |          |   |          |   |          |   |          |            |
| MR2U-1                                                                        | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 1.3        |
| MR2U-2                                                                        | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 4.9        |
| MR2U-3                                                                        | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 5.4        |
| M2U-Dup1 (Dup of 3)                                                           | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 8.5        |
| RPD                                                                           |                                          |           |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   |          |   |          |   | 0%       |   | 0%       | 45%        |
| MR2U-4                                                                        | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 3.3        |
| MR2U-5                                                                        | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 1.6        |
| MR2U-6                                                                        | 0-0.5"                                   | 8/27/2008 | U | 0.98     | U | 0.98     | U | 0.98     | U | 0.98     | U | 0.98     |   | *        |   | *        | U | 0.98     | U | 0.98     | 8.2        |
| MR2U-7                                                                        | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 7.1        |
| MR2U-8                                                                        | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 2.7        |
| MR2U-9                                                                        | 0-0.5"                                   | 8/27/2008 | U | 0.92     | U | 0.92     | U | 0.92     | U | 0.92     | U | 0.92     |   | *        |   | *        | U | 0.92     | U | 0.92     | 6          |
| MR2U-10                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.94     | U | 0.94     | U | 0.94     | U | 0.94     | U | 0.94     |   | *        |   | *        | U | 0.94     | U | 0.94     | 4.3        |
| MR2U-11                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 1          |
| MR2U-12                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 3.6        |
| MR2U-13                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 1.4        |
| MR2U-14                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 3.2        |
| MR2U-15                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 4.7        |
| MR2U-16                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 30         |
| M2U-Dup3 (Dup of 16)                                                          | 0-0.5"                                   | 8/27/2008 | U | 3.2      | U | 3.2      | U | 3.2      | U | 3.2      | U | 3.2      |   | *        |   | *        | U | 3.2      | U | 3.2      | 31         |
| RPD                                                                           |                                          |           |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   |          |   |          |   | 0%       |   | 0%       | 3%         |
| MR2U-17                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 12         |
| MR2U-18                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 18         |
| MR2U-19                                                                       | 0-0.5"                                   | 8/27/2008 | U | 1.6      | U | 1.6      | U | 1.6      | U | 1.6      | U | 1.6      |   | *        |   | *        | U | 1.6      | U | 1.6      | 4          |
| MR2U-20                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 19         |
| MR2U-21                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 13         |
| MR2U-22                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 28         |
| MR2U-23                                                                       | 0-0.5"                                   | 8/27/2008 | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      | U | 3.3      |   | *        |   | *        | U | 3.3      | U | 3.3      | 20         |
| MR2U-W1                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 4.4        |
| MR2U-W2                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.42     | U | 0.42     | U | 0.42     | U | 0.42     | U | 0.42     |   | *        |   | *        | U | 0.42     | U | 0.42     | 3.5        |
| MR2U-Dup5 (Dup of W2)                                                         | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 4.1        |
| RPD                                                                           |                                          |           |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   |          |   |          |   | 0%       |   | 0%       | 16%        |
| MR2U-W3                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 4.1        |
| MR2U-W4                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 4.6        |
| MR2U-W5                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     | U | 0.33     |   | *        |   | *        | U | 0.33     | U | 0.33     | 3.6        |
| MR2U-Dup2 (Dup of W5)                                                         | 0-0.5"                                   | 8/27/2008 | U | 0.32     | U | 0.32     | U | 0.32     | U | 0.32     | U | 0.32     |   | *        |   | *        | U | 0.32     | U | 0.32     | 2.7        |
| RPD                                                                           |                                          |           |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   | 0%       |   |          |   |          |   | 0%       |   | 0%       | 29%        |
| MR2U-W6                                                                       | 0-0.5"                                   | 8/27/2008 | U | 0.32     | U | 0.32     | U | 0.32     | U | 0.32     | U | 0.32     |   | *        |   | *        | U | 0.32     | U | 0.32     | 3          |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).



Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location                                                                                   | Depth  | Date       | PCB-1016 |      | PCB-1221 |      | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |      | PCB-1260 |      | PCB-1262 |      | PCB-1268 |      | Total PCBs |  |
|--------------------------------------------------------------------------------------------|--------|------------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|------------|--|
| CONCRETE- mg/kg (ppm)                                                                      |        |            |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |            |  |
| MR2U-W7                                                                                    | 0-0.5" | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.4        |  |
| MR2U-W8                                                                                    | 0-0.5" | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 3.2        |  |
| MR2U-W9                                                                                    | 0-0.5" | 8/27/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 3.1        |  |
| MR2U-W10                                                                                   | 0-0.5" | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 3.3        |  |
| MR2U-Dup4 (Dup of W10)                                                                     | 0-0.5" | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 3.8        |  |
| RPD                                                                                        |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      | 0%       |      | 0%       |      | 14%        |  |
| G-1                                                                                        | 0-0.5" | 11/12/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  |          | *    |          | *    | U        | 3.2  | U        | 3.2  | 15         |  |
| G-2                                                                                        | 0-0.5" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 33         |  |
| G-3                                                                                        | 0-0.5" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 8.8        |  |
| G-4                                                                                        | 0-0.5" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 6.2        |  |
| G-5                                                                                        | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 6.1        |  |
| Upper Level not including Machine Shop 2 (Concentration >1 ppm bold; >10 ppm bold italics) |        |            |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |            |  |
| UF-1                                                                                       | 0-0.5" | 10/8/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 2.8        |  |
| UF-2                                                                                       | 0-0.5" | 10/8/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.1        |  |
| UF-3                                                                                       | 0-0.5" | 10/8/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.62       |  |
| UF-4                                                                                       | 0-0.5" | 10/8/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.1        |  |
| UF-5                                                                                       | 0-0.5" | 10/8/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | 0          |  |
| UF-6                                                                                       | 0-0.5" | 10/8/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.9        |  |
| UF-7                                                                                       | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.8        |  |
| UF-8                                                                                       | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.1        |  |
| Dup-1 (Dup of UF-8)                                                                        | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2          |  |
| RPD                                                                                        |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      | 0%       |      | 0%       |      | 5%         |  |
| UF-9                                                                                       | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.36       |  |
| UF-10                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 0.7        |  |
| UF-11                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 0.67       |  |
| UF-12                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.64       |  |
| UF-13                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.1        |  |
| UF-14                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.6        |  |
| UF-15                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.51       |  |
| UF-16                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 2          |  |
| Dup-2 (Dup of UF-16)                                                                       | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.9        |  |
| RPD                                                                                        |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      | 0%       |      | 0%       |      | 5%         |  |
| UF-17                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.3        |  |
| UF-18                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.6        |  |
| UF-19                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.8        |  |
| UF-20                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 1.2        |  |
| UF-21                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.76       |  |
| UF-22                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.6        |  |
| UF-23                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 1.5        |  |
| UF-24                                                                                      | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.2        |  |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

# Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

## Concrete Analytical Data - PCBs PVDC Building 100 River Street Springfield, Vermont

| Location              | Depth  | Date       | PCB-1016 |      | PCB-1221 |      | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |   | PCB-1260 |      | PCB-1262 |      | PCB-1268 |  | Total PCBs |  |
|-----------------------|--------|------------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|---|----------|------|----------|------|----------|--|------------|--|
| CONCRETE- mg/kg (ppm) |        |            |          |      |          |      |          |      |          |      |          |      |          |   |          |      |          |      |          |  |            |  |
| UF-25                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 3.4      |  |            |  |
| UF-26                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 0.91     |  |            |  |
| Dup-5 (Dup of UF-26)  | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 1.1      |  |            |  |
| RPD                   |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   | 19%      |  |            |  |
| UF-27                 | 0-0.5" | 10/9/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  | 12       |  |            |  |
| UF-28                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 6.2      |  |            |  |
| UF-29                 | 0-0.5" | 10/9/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  | 19       |  |            |  |
| UF-30                 | 0-0.5" | 10/9/2008  | U        | 3.4  | U        | 3.4  | U        | 3.4  | U        | 3.4  | U        | 3.4  | *        | * | U        | 3.4  | U        | 3.4  | 38       |  |            |  |
| UF-31                 | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 | 3.4      |  |            |  |
| UF-32                 | 0-0.5" | 10/9/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  | 48       |  |            |  |
| Dup-9 (Dup of UF-32)  | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 46       |  |            |  |
| RPD                   |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   | 4%       |  |            |  |
| UF-33                 | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 | 3.4      |  |            |  |
| UF-34                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 1.6      |  |            |  |
| UF-35                 | 0-0.5" | 10/9/2008  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | *        | * | U        | 3.2  | U        | 3.2  | 16       |  |            |  |
| UF-36                 | 0-0.5" | 10/9/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 | 2.7      |  |            |  |
| UF-37                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 1.4      |  |            |  |
| UF-38                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 5.9      |  |            |  |
| UF-39                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 6.8      |  |            |  |
| UF-40                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 2.8      |  |            |  |
| UF-41                 | 0-0.5" | 10/9/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  | 5.1      |  |            |  |
| UF-42                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 2.3      |  |            |  |
| UF-43                 | 0-0.5" | 10/9/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  | 20       |  |            |  |
| UF-44                 | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 5.5      |  |            |  |
| UF-45                 | 0-0.5" | 10/10/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 | 3        |  |            |  |
| UF-46                 | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 3.5      |  |            |  |
| Dup-4 (Dup of UF-46)  | 0-0.5" | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 1.9      |  |            |  |
| RPD                   |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   | 59%      |  |            |  |
| UF-47                 | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 2.2      |  |            |  |
| UF-48                 | 0-0.5" | 10/10/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  | 20       |  |            |  |
| UF-49                 | 0-0.5" | 10/10/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | *        | * | U        | 3.2  | U        | 3.2  | 12       |  |            |  |
| Dup-6 (Dup of UF-48)  | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 5.4      |  |            |  |
| RPD                   |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   | 76%      |  |            |  |
| UF-50                 | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 3.9      |  |            |  |
| UF-51                 | 0-0.5" | 10/10/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 | 3        |  |            |  |
| UF-52                 | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 1.4      |  |            |  |
| Dup-7 (Dup of UF-52)  | 0-0.5" | 10/10/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 | 1.3      |  |            |  |
| RPD                   |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   | 7%       |  |            |  |
| UF-53                 | 0-0.5" | 10/10/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  | 41       |  |            |  |
| UF-54                 | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 | 1.7      |  |            |  |

### Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location                                                                                  | Depth  | Date       | PCB-1016 |      | PCB-1221 |      | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |   | PCB-1260 |   | PCB-1262 |      | PCB-1268 |      | Total PCBs |  |
|-------------------------------------------------------------------------------------------|--------|------------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|---|----------|---|----------|------|----------|------|------------|--|
| CONCRETE- mg/kg (ppm)                                                                     |        |            |          |      |          |      |          |      |          |      |          |      |          |   |          |   |          |      |          |      |            |  |
| UF-55                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 2.3        |  |
| UF-56                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.4        |  |
| UF-57                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.1        |  |
| UF-58                                                                                     | 0-0.5" | 10/10/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 18         |  |
| UF-59                                                                                     | 0-0.5" | 10/10/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 1.7        |  |
| UF-60                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.8        |  |
| Dup-8 (Dup of UF-60)                                                                      | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.4        |  |
| RPD                                                                                       |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          |   |          | 0%   |          | 0%   | 25%        |  |
| UF-61                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 0.89       |  |
| UF-62                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3.1        |  |
| UF-63                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 0.83       |  |
| UF-64                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.7        |  |
| UF-65                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 0.99       |  |
| UF-66                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 0.68       |  |
| UF-67                                                                                     | 0-0.5" | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 0.65       |  |
| 1-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.5        |  |
| 2-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  |          | * |          | * | U        | 1.6  | U        | 1.6  | 11         |  |
| 3-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 0.65 | U        | 0.65 | U        | 0.65 | U        | 0.65 | U        | 0.65 |          | * |          | * | U        | 0.65 | U        | 0.65 | 6.1        |  |
| 4-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 8.8        |  |
| 5-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | * |          | * | U        | 0.32 | U        | 0.32 | 2.8        |  |
| 6-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  |          | * |          | * | U        | 1.6  | U        | 1.6  | 11         |  |
| 7-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 0.66 | U        | 0.66 | U        | 0.66 | U        | 0.66 | U        | 0.66 |          | * |          | * | U        | 0.66 | U        | 0.66 | 7.2        |  |
| 8-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 0.66 | U        | 0.66 | U        | 0.66 | U        | 0.66 | U        | 0.66 |          | * |          | * | U        | 0.66 | U        | 0.66 | 4.2        |  |
| 9-UH                                                                                      | 0-0.5" | 11/12/2008 | U        | 0.66 | U        | 0.66 | U        | 0.66 | U        | 0.66 | U        | 0.66 |          | * |          | * | U        | 0.66 | U        | 0.66 | 8          |  |
| 10-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3.8        |  |
| Dup1-UH (Dup of 10-UH)                                                                    | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 5.8        |  |
| RPD                                                                                       |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          |   |          | 0%   |          | 0%   | 42%        |  |
| 11-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 0.86       |  |
| 12-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 2.5        |  |
| 13-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.8        |  |
| 14-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.7        |  |
| 15-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.9        |  |
| 16-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.1        |  |
| Dup2-UH (Dup of 16-UH)                                                                    | 0-0.5" | 11/12/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.2        |  |
| RPD                                                                                       |        |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          |   |          | 0%   |          | 0%   | 9%         |  |
| 17-UH                                                                                     | 0-0.5" | 11/12/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | * |          | * | U        | 0.32 | U        | 0.32 | 1.4        |  |
| Shot Blast Test Area #1 in Cutting Room (Concentration >1 ppm bold; >10 ppm bold italics) |        |            |          |      |          |      |          |      |          |      |          |      |          |   |          |   |          |      |          |      |            |  |
| Test-Q1-0                                                                                 | 0-0.5" | 11/12/2008 | U        | 33   | U        | 33   | U        | 33   | U        | 33   | U        | 33   |          | * |          | * | U        | 33   | U        | 33   | 67         |  |
| Test-Q2-0                                                                                 | 0-0.5" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 30         |  |
| Test-Q3-0                                                                                 | 0-0.5" | 11/12/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  |          | * |          | * | U        | 3.2  | U        | 3.2  | 42         |  |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location                                                                                          | Depth      | Date       | PCB-1016 |      | PCB-1221 |      | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |   | PCB-1260 |   | PCB-1262 |      | PCB-1268 |      | Total PCBs |  |
|---------------------------------------------------------------------------------------------------|------------|------------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|---|----------|---|----------|------|----------|------|------------|--|
| CONCRETE- mg/kg (ppm)                                                                             |            |            |          |      |          |      |          |      |          |      |          |      |          |   |          |   |          |      |          |      |            |  |
| Test-Dup-0 (Dup of Q3-0)                                                                          | 0-0.5"     | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 56         |  |
| RPD                                                                                               |            |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          |   | 0%       |      | 0%       |      | 29%        |  |
| Test-Q4-0                                                                                         | 0-0.5"     | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 49         |  |
| Test-Q1-1                                                                                         | 0.06-0.56" | 11/12/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  |          | * |          | * | U        | 3.2  | U        | 3.2  | 58         |  |
| Test-Q2-1                                                                                         | 0.06-0.56" | 11/12/2008 | U        | 3.4  | U        | 3.4  | U        | 3.4  | U        | 3.4  | U        | 3.4  |          | * |          | * | U        | 3.4  | U        | 3.4  | 22         |  |
| Test-Q3-1                                                                                         | 0.06-0.56" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 42         |  |
| Test-Dup-1 (Dup of Q3-1)                                                                          | 0.06-0.56" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 44         |  |
| RPD                                                                                               |            |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          |   | 0%       |      | 0%       |      | 5%         |  |
| Test-Q4-1                                                                                         | 0.06-0.56" | 11/12/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  |          | * |          | * | U        | 3.2  | U        | 3.2  | 34         |  |
| Test-Q1-2                                                                                         | 0.13-0.63" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 35         |  |
| Test-Q2-2                                                                                         | 0.13-0.63" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 15         |  |
| Test-Q3-2                                                                                         | 0.13-0.63" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 28         |  |
| Test-Q4-2                                                                                         | 0.13-0.63" | 11/12/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  |          | * |          | * | U        | 3.2  | U        | 3.2  | 41         |  |
| Test-Q1-3                                                                                         | 0.25-0.75" | 11/12/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  |          | * |          | * | U        | 3.2  | U        | 3.2  | 55         |  |
| Test-Q2-3                                                                                         | 0.25-0.75" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 14         |  |
| Test-Q3-3                                                                                         | 0.25-0.75" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 14         |  |
| Test-Q4-3                                                                                         | 0.25-0.75" | 11/12/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 30         |  |
| Shot Blast Test #2 (Concentration >1 ppm bold; >10 ppm bold italics) - UF-39, UF-42, UF-50, UF-57 |            |            |          |      |          |      |          |      |          |      |          |      |          |   |          |   |          |      |          |      |            |  |
| UF-39 (Concentration >1 ppm bold; >25 ppm bold italics)                                           |            |            |          |      |          |      |          |      |          |      |          |      |          |   |          |   |          |      |          |      |            |  |
| UF-39(0)                                                                                          | 0-0.5"     | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 6.8        |  |
| UF-39(1/16)                                                                                       | 1/16-9/16" | 12/15/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | * |          | * | U        | 3.3  | U        | 3.3  | 14         |  |
| UF-39(1/8)                                                                                        | 1/8-5/8"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 7.1        |  |
| UF-39(1/4)                                                                                        | 1/4-3/4"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3.5        |  |
| Dup-1 (Dup of UF-39(1/4))                                                                         | 1/4-3/4"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3.4        |  |
| RPD                                                                                               |            |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          |   | 0%       |      | 0%       |      | 3%         |  |
| UF-39(1/2)                                                                                        | 1/2-1"     | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.6        |  |
| UF-42(0)                                                                                          | 0-0.5"     | 10/9/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 2.3        |  |
| UF-42(1/16)                                                                                       | 1/16-9/16" | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 4.5        |  |
| UF-42(1/8)                                                                                        | 1/8-5/8"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 5.3        |  |
| UF-42(1/4)                                                                                        | 1/4-3/4"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3          |  |
| UF-42(1/2)                                                                                        | 1/2-1"     | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 4.4        |  |
| UF-50(0)                                                                                          | 0-0.5"     | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3.9        |  |
| UF-50(1/16)                                                                                       | 1/16-9/16" | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 5.2        |  |
| UF-50(1/8)                                                                                        | 1/8-5/8"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 4.2        |  |
| UF-50(1/4)                                                                                        | 1/4-3/4"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3.2        |  |
| Dup-1 (Dup of UF-50(1/4))                                                                         | 1/4-3/4"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 3.3        |  |
| RPD                                                                                               |            |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          |   | 0%       |      | 0%       |      | 3%         |  |
| UF-50(1/2)                                                                                        | 1/2-1"     | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.1        |  |
| UF-57(0)                                                                                          | 0-0.5"     | 10/10/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.1        |  |
| UF-57(1/16)                                                                                       | 1/16-9/16" | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | * |          | * | U        | 0.33 | U        | 0.33 | 1.8        |  |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location                                                                              | Depth    | Date       | PCB-1016 |      | PCB-1221 |      | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |      | PCB-1260 |      | PCB-1262 |      | PCB-1268 |      | Total PCBs |  |
|---------------------------------------------------------------------------------------|----------|------------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|------------|--|
| CONCRETE- mg/kg (ppm)                                                                 |          |            |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |            |  |
| UF-57(1/8)                                                                            | 1/8-5/8" | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.4        |  |
| UF-57(1/4)                                                                            | 1/4-3/4" | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.95       |  |
| UF-57(1/2)                                                                            | 1/2-1"   | 12/15/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.94       |  |
| Machine Shop 2- Lower Level (Concentration >1 ppm bold; >25 ppm <i>bold italics</i> ) |          |            |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |          |      |            |  |
| MR2L-1                                                                                | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 4.6        |  |
| MR2L-2                                                                                | 0-0.5"   | 8/27/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 11         |  |
| MR2L-3                                                                                | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 4.6        |  |
| MR2L-Dup1 (Dup of 3)                                                                  | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 3.6        |  |
| RPD                                                                                   |          |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      |          | 0%   |          | 0%   | 24%        |  |
| MR2L-4                                                                                | 0-0.5"   | 8/27/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 2.1        |  |
| MR2L-5                                                                                | 0-0.5"   | 8/27/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 18         |  |
| MR2L-6                                                                                | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 3.9        |  |
| MR2L-7                                                                                | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 4.3        |  |
| MR2L-8                                                                                | 0-0.5"   | 8/27/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 10         |  |
| MR2L-Dup2 (Dup of 8)                                                                  | 0-0.5"   | 8/27/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 14         |  |
| RPD                                                                                   |          |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      |          | 0%   |          | 0%   | 33%        |  |
| MR2L-9                                                                                | 0-0.5"   | 8/27/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 2.6        |  |
| MR2L-10                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.8        |  |
| MR2L-11                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.6        |  |
| MR2L-12                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 3.5        |  |
| MR2L-Dup3 (Dup of 12)                                                                 | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 3.4        |  |
| RPD                                                                                   |          |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      |          | 0%   |          | 0%   | 3%         |  |
| MR2L-13                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.2        |  |
| MR2L-14                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 0.71       |  |
| MR2L-15                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | 4    | U        | 0.33 | U        | 0.33 | U        | 0.33 | 4          |  |
| MR2L-Dup4 (Dup of 15)                                                                 | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 2.4        |  |
| RPD                                                                                   |          |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      |          | 0%   |          | 0%   | 50%        |  |
| MR2L-16                                                                               | 0-0.5"   | 8/27/2008  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  |          | *    |          | *    | U        | 3.3  | U        | 3.3  | 11         |  |
| MR2L-17                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.67       |  |
| MR2L-18                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.19 | U        | 0.19 | U        | 0.19 | U        | 0.19 | U        | 0.19 | U        | 0.19 | U        | 0.19 | U        | 0.19 | U        | 0.19 | 0          |  |
| MR2L-19                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.77       |  |
| MR2L-Dup5 (Dup of 19)                                                                 | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.94       |  |
| RPD                                                                                   |          |            |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |      |          |      |          | 0%   |          | 0%   | 20%        |  |
| MR2L-20                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.37       |  |
| MR2L-21                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 0.94       |  |
| MR2L-22                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.9        |  |
| MR2L-23                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.8        |  |
| MR2L-24                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.9        |  |
| MR2L-25                                                                               | 0-0.5"   | 8/27/2008  | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 |          | *    |          | *    | U        | 0.33 | U        | 0.33 | 1.9        |  |
| MR2L-Dup6 (Dup of 25)                                                                 | 0-0.5"   | 8/27/2008  | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 |          | *    |          | *    | U        | 0.32 | U        | 0.32 | 2.2        |  |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location                                                         | Depth  | Date      |   | PCB-1016 |   | PCB-1221 | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |   | PCB-1260 |      | PCB-1262 |      | PCB-1268 |      | Total PCBs |
|------------------------------------------------------------------|--------|-----------|---|----------|---|----------|----------|------|----------|------|----------|------|----------|---|----------|------|----------|------|----------|------|------------|
| CONCRETE- mg/kg (ppm)                                            |        |           |   |          |   |          |          |      |          |      |          |      |          |   |          |      |          |      |          |      |            |
| RPD                                                              |        |           |   | 0%       |   | 0%       |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 15%  |            |
| MR2L-26                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 4.1  |            |
| MR2L-27                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 4.3  |            |
| MR2L-28                                                          | 0-0.5" | 8/27/2008 | U | 3.3      | U | 3.3      | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 11   |            |
| MR2L-29                                                          | 0-0.5" | 8/27/2008 | U | 3.3      | U | 3.3      | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 6.6  |            |
| MR2L-30                                                          | 0-0.5" | 8/27/2008 | U | 0.32     | U | 0.32     | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 1.1  |            |
| MR2L-31                                                          | 0-0.5" | 8/27/2008 | U | 3.2      | U | 3.2      | U        | 3.2  | U        | 3.2  | U        | 3.2  | *        | * | U        | 3.2  | U        | 3.2  |          | 7    |            |
| MR2L-Dup7 (Dup of 31)                                            | 0-0.5" | 8/27/2008 | U | 3.3      | U | 3.3      | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 13   |            |
| RPD                                                              |        |           |   | 0%       |   | 0%       |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 60%  |            |
| MR2L-32                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 3.7  |            |
| MR2L-DUP8 (Dup of 32)                                            | 0-0.5" | 8/27/2008 | U | 1.7      | U | 1.7      | U        | 1.7  | U        | 1.7  | U        | 1.7  | *        | * | U        | 1.7  | U        | 1.7  |          | 5.2  |            |
| RPD                                                              |        |           |   | 0%       |   | 0%       |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 34%  |            |
| MR2L-33                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 1.9  |            |
| MR2L-34                                                          | 0-0.5" | 8/27/2008 | U | 3.3      | U | 3.3      | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 12   |            |
| MR2L-35                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 3.8  |            |
| MR2L-36                                                          | 0-0.5" | 8/27/2008 | U | 0.32     | U | 0.32     | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 4.3  |            |
| MR2L-37                                                          | 0-0.5" | 8/27/2008 | U | 3.2      | U | 3.2      | U        | 3.2  | U        | 3.2  | U        | 3.2  | *        | * | U        | 3.2  | U        | 3.2  |          | 16   |            |
| MR2L-38                                                          | 0-0.5" | 8/27/2008 | U | 3.3      | U | 3.3      | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 14   |            |
| MR2L-39                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 1.6  |            |
| MR2L-Dup9 (Dup of 39)                                            | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.3  |            |
| RPD                                                              |        |           |   | 0%       |   | 0%       |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 36%  |            |
| MR2L-40                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 1.9  |            |
| MR2L-41                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 3.3  |            |
| MR2L-42                                                          | 0-0.5" | 8/27/2008 | U | 3.3      | U | 3.3      | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 19   |            |
| MR2L-43                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 3.8  |            |
| MR2L-44                                                          | 0-0.5" | 8/27/2008 | U | 3.3      | U | 3.3      | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 10   |            |
| MR2L-45                                                          | 0-0.5" | 8/27/2008 | U | 0.32     | U | 0.32     | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 2.2  |            |
| MR2L-46                                                          | 0-0.5" | 8/27/2008 | U | 0.32     | U | 0.32     | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 0.53 |            |
| MR2L-47                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 4.4  |            |
| MR2L-48                                                          | 0-0.5" | 8/27/2008 | U | 0.32     | U | 0.32     | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 4    |            |
| MR2L-Dup10 (Dup of 48)                                           | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 4.2  |            |
| RPD                                                              |        |           |   | 0%       |   | 0%       |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 5%   |            |
| MR2L-49                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 4.1  |            |
| MR2L-50                                                          | 0-0.5" | 8/27/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 0.45 |            |
| Machine Shop 4 (Concentration >1 ppm bold; >10 ppm bold italics) |        |           |   |          |   |          |          |      |          |      |          |      |          |   |          |      |          |      |          |      |            |
| MR4-1                                                            | 0-0.5" | 8/28/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.4  |            |
| MR4-2                                                            | 0-0.5" | 8/28/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 1.5  |            |
| MR4-3                                                            | 0-0.5" | 8/28/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.5  |            |
| MR4-4                                                            | 0-0.5" | 8/28/2008 | U | 0.32     | U | 0.32     | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 2    |            |
| MR4-5                                                            | 0-0.5" | 8/28/2008 | U | 0.33     | U | 0.33     | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 3.4  |            |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).



Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

**Concrete Analytical Data - PCBs**  
**PVDC Building**  
**100 River Street**  
**Springfield, Vermont**

| Location              | Depth  | Date      | PCB-1016 |      | PCB-1221 |      | PCB-1232 |      | PCB-1242 |      | PCB-1248 |      | PCB-1254 |   | PCB-1260 |      | PCB-1262 |      | PCB-1268 |     | Total PCBs |  |
|-----------------------|--------|-----------|----------|------|----------|------|----------|------|----------|------|----------|------|----------|---|----------|------|----------|------|----------|-----|------------|--|
| CONCRETE- mg/kg (ppm) |        |           |          |      |          |      |          |      |          |      |          |      |          |   |          |      |          |      |          |     |            |  |
| MR4-6                 | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.1 |            |  |
| MR4-7                 | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.9 |            |  |
| MR4-Dup1 (Dup of 7)   | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 5.1 |            |  |
| RPD                   |        |           |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 55% |            |  |
| MR4-8                 | 0-0.5" | 8/28/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 2.1 |            |  |
| MR4-9                 | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 13  |            |  |
| MR4-Dup2 (Dup of 9)   | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 14  |            |  |
| RPD                   |        |           |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 7%  |            |  |
| MR4-10                | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 1.8 |            |  |
| MR4-11                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 7.2 |            |  |
| MR4-12                | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.8 |            |  |
| MR4-13                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 21  |            |  |
| MR4-14                | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.5 |            |  |
| MR4-15                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 14  |            |  |
| MR4-16                | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 3.6 |            |  |
| MR4-Dup3 (Dup of 16)  | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 4   |            |  |
| RPD                   |        |           |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 11% |            |  |
| MR4-17                | 0-0.5" | 8/28/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | *        | * | U        | 3.2  | U        | 3.2  |          | 9.2 |            |  |
| MR4-18                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 9   |            |  |
| MR4-19                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 17  |            |  |
| MR4-Dup4 (Dup of 19)  | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 20  |            |  |
| RPD                   |        |           |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 16% |            |  |
| MR4-20                | 0-0.5" | 8/28/2008 | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  | *        | * | U        | 1.6  | U        | 1.6  |          | 5.3 |            |  |
| MR4-21                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 5.7 |            |  |
| MR4-22                | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.8 |            |  |
| MR4-23                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 8.6 |            |  |
| MR4-24                | 0-0.5" | 8/28/2008 | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  | U        | 1.6  | *        | * | U        | 1.6  | U        | 1.6  |          | 5.7 |            |  |
| MR4-25                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 13  |            |  |
| MR4-26                | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.8 |            |  |
| MR4-27                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 3.4 |            |  |
| MR4-28                | 0-0.5" | 8/28/2008 | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | U        | 3.2  | *        | * | U        | 3.2  | U        | 3.2  |          | 12  |            |  |
| MR4-29                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 11  |            |  |
| MR4-30                | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.4 |            |  |
| MR4-Dup5 (Dup of 30)  | 0-0.5" | 8/28/2008 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | U        | 0.33 | *        | * | U        | 0.33 | U        | 0.33 |          | 2.1 |            |  |
| RPD                   |        |           |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          | 0%   |          |   |          | 0%   |          | 0%   |          | 13% |            |  |
| MR4-31                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 10  |            |  |
| MR4-32                | 0-0.5" | 8/28/2008 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | U        | 0.32 | *        | * | U        | 0.32 | U        | 0.32 |          | 2.8 |            |  |
| MR4-33                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 7.8 |            |  |
| MR4-34                | 0-0.5" | 8/28/2008 | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | U        | 3.3  | *        | * | U        | 3.3  | U        | 3.3  |          | 18  |            |  |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

Concrete Analytical Data - PCBs  
PVDC Building  
100 River Street  
Springfield, Vermont

| Location                                                                                | Depth  | Date       | PCB-1016 | PCB-1221 | PCB-1232 | PCB-1242 | PCB-1248 | PCB-1254 | PCB-1260 | PCB-1262 | PCB-1268 | Total PCBs |
|-----------------------------------------------------------------------------------------|--------|------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|------------|
| CONCRETE- mg/kg (ppm)                                                                   |        |            |          |          |          |          |          |          |          |          |          |            |
| Basement not including Machine Shop 4 (Concentration >1 ppm bold; >10 ppm bold italics) |        |            |          |          |          |          |          |          |          |          |          |            |
| LF-1                                                                                    | 0-0.5" | 10/10/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 4.6        |
| LF-2                                                                                    | 0-0.5" | 10/10/2008 | U        | 3.3      | U        | 3.3      | U        | 3.3      | U        | 3.3      |          | 5.1        |
| LF-3                                                                                    | 0-0.5" | 10/10/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 3.3        |
| Dup-9 (Dup of LF-3)                                                                     | 0-0.5" | 10/9/2008  | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 3          |
| RPD                                                                                     |        |            |          | 0%       |          | 0%       |          | 0%       |          | 0%       |          | 10%        |
| LF-4                                                                                    | 0-0.5" | 10/10/2008 | U        | 1.6      | U        | 1.6      | U        | 1.6      | U        | 1.6      |          | 18         |
| LF-5                                                                                    | 0-0.5" | 10/10/2008 | U        | 3.3      | U        | 3.3      | U        | 3.3      | U        | 3.3      |          | 7.3        |
| LF-6                                                                                    | 0-0.5" | 10/10/2008 | U        | 3.3      | U        | 3.3      | U        | 3.3      | U        | 3.3      |          | 2.1        |
| LF-7                                                                                    | 0-0.5" | 10/10/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 1.7        |
| LF-8                                                                                    | 0-0.5" | 10/10/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 5.1        |
| LF-9                                                                                    | 0-0.5" | 10/10/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 4.7        |
| LF-10                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 1.7        |
| Dup10 (Dup of LF-10)                                                                    | 0-0.5" | 10/10/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 1.5        |
| RPD                                                                                     |        |            |          | 0%       |          | 0%       |          | 0%       |          | 0%       |          | 13%        |
| LF-11                                                                                   | 0-0.5" | 10/10/2008 | U        | 3.3      | U        | 3.3      | U        | 3.3      | U        | 3.3      |          | 1.5        |
| LF-12                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 7.6        |
| LF-13                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 1.7        |
| LF-14                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 0.48       |
| LF-15                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 3.1        |
| LF-16                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 1.4        |
| LF-17                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 5.6        |
| LF-18                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 7.8        |
| LF-19                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 1.6        |
| LF-20                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 1.2        |
| LF-21                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 0.78       |
| LF-22                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 1          |
| LF-23                                                                                   | 0-0.5" | 10/10/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 0.38       |
| Office Areas (first and second floor) (Concentration >1 ppm bold; >25 ppm bold italics) |        |            |          |          |          |          |          |          |          |          |          |            |
| 18-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.35     | U        | 0.35     | U        | 0.35     | U        | 0.35     |          | 0.83       |
| 19-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.57     | U        | 0.57     | U        | 0.57     | U        | 0.57     |          | 0          |
| Dup3-UH (Dup fo 19-UH)                                                                  | 0-0.5" | 11/12/2008 | U        | 0.61     | U        | 0.61     | U        | 0.61     | U        | 0.61     |          | 0          |
| RPD                                                                                     |        |            |          | 0%       |          | 0%       |          | 0%       |          | 0%       |          | 0%         |
| 20-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 0          |
| 21-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 0          |
| 22-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.42     | U        | 0.42     | U        | 0.42     | U        | 0.42     |          | 0          |
| 23-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.34     | U        | 0.34     | U        | 0.34     | U        | 0.34     |          | 0          |
| 24-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | 0          |
| 25-UH                                                                                   | 0-0.5" | 11/12/2008 | U        | 0.64     | U        | 0.64     | U        | 0.64     | U        | 0.64     |          | 0          |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

## Johnson Company 2008 Supplemental Investigation

Table D-1: Johson Company 2008 Supplemental Investigation

The Johnson Company

Concrete Analytical Data - PCBs  
 PVDC Building  
 100 River Street  
 Springfield, Vermont

| Location                                                                            | Depth  | Date      | PCB-1016 | PCB-1221 | PCB-1232 | PCB-1242 | PCB-1248 | PCB-1254 | PCB-1260 | PCB-1262 | PCB-1268 | Total PCBs |      |
|-------------------------------------------------------------------------------------|--------|-----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|------------|------|
| CONCRETE- mg/kg (ppm)                                                               |        |           |          |          |          |          |          |          |          |          |          |            |      |
| Transformer Areas (Concentration >1 ppm <b>bold</b> ; >25 ppm <b>bold italics</b> ) |        |           |          |          |          |          |          |          |          |          |          |            |      |
| TP1-1                                                                               | 0-0.5" | 8/26/2008 | U        | 0.17     | U        | 0.17     | U        | 0.17     | U        | 0.17     | U        | 0.17       | 0    |
| TP1-2                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TP1-3                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TP2-1                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TP2-2                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TP2-3                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TP3-1                                                                               | 0-0.5" | 8/26/2008 | U        | 0.2      | U        | 0.2      | U        | 0.2      | U        | 0.2      | U        | 0.2        | 0    |
| TP3-2                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TRF-1                                                                               | 0-0.5" | 8/26/2008 | U        | 0.33     | U        | 0.33     | U        | 0.33     | U        | 0.33     |          | *          | 0.68 |
| TRF-2                                                                               | 0-0.5" | 8/26/2008 | U        | 0.32     | U        | 0.32     | U        | 0.32     | U        | 0.32     |          | 2.2        | 2.2  |
| TRW-1                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TRW-2                                                                               | 0-0.5" | 8/26/2008 | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16     | U        | 0.16       | 0    |
| TRW-3                                                                               | 0-0.5" | 8/26/2008 | U        | 0.17     | U        | 0.17     | U        | 0.17     | U        | 0.17     | U        | 0.17       | 0    |

## Notes:

U = Not detected below laboratory limit shown.

\* = Lab could not differentiate, total PCB concentration shown.

T1 analytical data as reported by URS (2008).

Table D-2: Stone 2014 Site Status Report  
Summary of Characterization Results, Part A

| Sample ID    | TSCA: Solid Porous |               |       |       | AOC4-CN-003 |   | AOC4-SD-001 |   | AOC4-SD-001-FD |   | AOC4-SD-002 |   |
|--------------|--------------------|---------------|-------|-------|-------------|---|-------------|---|----------------|---|-------------|---|
| Sample Date  | Media Low          |               |       |       | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010       | Q | 9/3/2010    | Q |
| Analyte      | CAS                | Occupancy Cap | Media | Units | Concrete    |   | Solid       |   | Solid          |   | Solid       |   |
| PCBs         |                    |               |       |       |             |   |             |   |                |   |             |   |
| Aroclor 1016 | 12674-11-2         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Aroclor 1221 | 11104-28-2         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Aroclor 1232 | 11141-16-5         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Aroclor 1242 | 53469-21-9         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Aroclor 1248 | 12672-29-6         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Aroclor 1254 | 11097-69-1         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 720         |   |
| Aroclor 1260 | 11096-82-5         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Aroclor 1262 | 37324-23-5         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Aroclor 1268 | 11100-14-4         | 100           |       | mg/Kg | 0.58        | U | 0.86        | U | 0.90           | U | 46          | U |
| Total PCBs   |                    |               |       | mg/Kg | 720         |   |             |   |                |   |             |   |

Key:

mg/Kg - micrograms per kilogram

**Bold** results indicate detections of the analyte

Shaded results indicate an exceedence of the enforcement standard(s)

NE- Not Established

U - Analyte not detected; limit of quantitation listed

TSCA - Toxic Substance Control Act

Table D-2: Stone 2014 Site Status Report  
Summary of Characterization Results, Part C

| Sample ID                    |     |       | TSCA:  |       | AOC3-CN-001 |   | AOC3-CN-002 |   | AOC3-CN-003 |   | AOC3-CN-004 |   | AOC3-CN-005 |   | AOC3-CN-006    |   | AOC3-CN-007 |   | AOC3-CN-007DUP |   |
|------------------------------|-----|-------|--------|-------|-------------|---|-------------|---|-------------|---|-------------|---|-------------|---|----------------|---|-------------|---|----------------|---|
| Sample Date                  |     |       | Solid  |       | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010       | Q | 9/3/2010    | Q | 9/3/2010       | Q |
| Analyte                      | CAS | Units | Porous | Media | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete       |   | Concrete    |   | Concrete       |   |
| PCBs                         |     |       |        |       |             |   |             |   |             |   |             |   |             |   |                |   |             |   |                |   |
| Aroclor 10: 12674-11-2 mg/Kg |     |       | 1      |       | 0.44 U      |   | 0.5 U       |   | 0.48 U      |   | 0.59 U      |   | 0.44 U      |   | 0.46 U         |   | 0.5 U       |   | 0.49 U         |   |
| Aroclor 12: 11104-28-2 mg/Kg |     |       | 1      |       | 0.44 U      |   | 0.5 U       |   | 0.48 U      |   | 0.59 U      |   | 0.44 U      |   | 0.46 U         |   | 0.5 U       |   | 0.49 U         |   |
| Aroclor 12: 11141-16-5 mg/Kg |     |       | 1      |       | 0.44 U      |   | 0.5 U       |   | 0.48 U      |   | 0.59 U      |   | 0.44 U      |   | 0.46 U         |   | 0.5 U       |   | 0.49 U         |   |
| Aroclor 12: 53469-21-5 mg/Kg |     |       | 1      |       | 0.44 U      |   | 0.5 U       |   | 0.48 U      |   | 0.59 U      |   | 0.44 U      |   | 0.46 U         |   | 0.5 U       |   | 0.49 U         |   |
| Aroclor 12: 12672-29-6 mg/Kg |     |       | 1      |       | 0.44 U      |   | 0.5 U       |   | 0.48 U      |   | 0.59 U      |   | 0.44 U      |   | 0.46 U         |   | 0.5 U       |   | 0.49 U         |   |
| Aroclor 12: 11097-69-1 mg/Kg |     |       | 1      |       | 0.66        |   | 1.5         |   | 0.78        |   | 3.2         |   | 4.4         |   | 0.46 U         |   | 10          |   | 4.4            |   |
| Aroclor 12: 11096-82-5 mg/Kg |     |       | 1      |       | 0.62        |   | 0.54        |   | 0.48 U      |   | 1.7         |   | 2.2         |   | 0.46 U         |   | 5.4         |   | 1.6            |   |
| Aroclor 12: 37324-23-5 mg/Kg |     |       | 1      |       | 0.44 U      |   | 0.5 U       |   | 0.48 U      |   | 0.59 U      |   | 0.44 U      |   | 0.46 U         |   | 0.5 U       |   | 0.49 U         |   |
| Aroclor 12: 11100-14-2 mg/Kg |     |       | 1      |       | 0.44 U      |   | 0.5 U       |   | 0.48 U      |   | 0.59 U      |   | 0.44 U      |   | 0.46 U         |   | 0.5 U       |   | 0.49 U         |   |
| Total PCBs                   |     |       | mg/Kg  |       | 1.28        |   | 2.04        |   | 780         |   | 4.9         |   | 6.6         |   |                |   | 15.4        |   | 6.0            |   |
| Sample ID                    |     |       | TSCA:  |       | AOC3-CN-008 |   | AOC3-CN-009 |   | AOC3-CN-010 |   | AOC3-CN-011 |   | AOC3-CN-012 |   | AOC3-CN-013    |   | AOC3-CN-014 |   | AOC3-CN-018    |   |
| Sample Date                  |     |       | Solid  |       | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010       | Q | 9/3/2010    | Q | 9/3/2010       | Q |
| Analyte                      | CAS | Units | Porous | Media | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete       |   | Concrete    |   | Concrete       |   |
| PCBs                         |     |       |        |       |             |   |             |   |             |   |             |   |             |   |                |   |             |   |                |   |
| Aroclor 10: 12674-11-2 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.43 U      |   | 0.46 U      |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 0.46 U         |   |
| Aroclor 12: 11104-28-2 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.43 U      |   | 0.46 U      |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 0.46 U         |   |
| Aroclor 12: 11141-16-5 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.43 U      |   | 0.46 U      |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 0.46 U         |   |
| Aroclor 12: 53469-21-5 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.43 U      |   | 0.46 U      |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 0.46 U         |   |
| Aroclor 12: 12672-29-6 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.43 U      |   | 0.46 U      |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 0.46 U         |   |
| Aroclor 12: 11097-69-1 mg/Kg |     |       | 1      |       | 7.1         |   | 6.6         |   | 7.5         |   | 4.9         |   | 0.56        |   | 0.48 U         |   | 0.58        |   | 3.9            |   |
| Aroclor 12: 11096-82-5 mg/Kg |     |       | 1      |       | 1.6         |   | 1.6         |   | 1.9         |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 2.7            |   |
| Aroclor 12: 37324-23-5 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.43 U      |   | 0.46 U      |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 0.46 U         |   |
| Aroclor 12: 11100-14-2 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.43 U      |   | 0.46 U      |   | 0.48 U      |   | 0.5 U       |   | 0.48 U         |   | 0.46 U      |   | 0.46 U         |   |
| Total PCBs                   |     |       | mg/Kg  |       | 8.7         |   | 8.2         |   | 9.4         |   | 4.9         |   | 0.56        |   |                |   | 0.58        |   | 6.6            |   |
| Sample ID                    |     |       | TSCA:  |       | AOC3-CN-019 |   | AOC3-CN-020 |   | AOC3-CN-028 |   | AOC3-CN-029 |   | AOC3-CN-030 |   | AOC3-CN-030DUP |   | AOC3-CN-031 |   | AOC3-CN-032    |   |
| Sample Date                  |     |       | Solid  |       | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010       | Q | 9/3/2010    | Q | 9/3/2010       | Q |
| Analyte                      | CAS | Units | Porous | Media | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete       |   | Concrete    |   | Concrete       |   |
| PCBs                         |     |       |        |       |             |   |             |   |             |   |             |   |             |   |                |   |             |   |                |   |
| Aroclor 10: 12674-11-2 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.48 U      |   | 0.45 U      |   | 0.51 U      |   | 0.50 U      |   | 0.52 U         |   | 0.50 U      |   | 0.50 U         |   |
| Aroclor 12: 11104-28-2 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.48 U      |   | 0.45 U      |   | 0.51 U      |   | 0.50 U      |   | 0.52 U         |   | 0.50 U      |   | 0.50 U         |   |
| Aroclor 12: 11141-16-5 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.48 U      |   | 0.45 U      |   | 0.51 U      |   | 0.50 U      |   | 0.52 U         |   | 0.50 U      |   | 0.50 U         |   |
| Aroclor 12: 53469-21-5 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.48 U      |   | 0.45 U      |   | 0.51 U      |   | 0.50 U      |   | 0.52 U         |   | 0.50 U      |   | 0.50 U         |   |
| Aroclor 12: 12672-29-6 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.48 U      |   | 0.45 U      |   | 0.51 U      |   | 0.50 U      |   | 0.52 U         |   | 0.50 U      |   | 0.50 U         |   |
| Aroclor 12: 11097-69-1 mg/Kg |     |       | 1      |       | 5.6         |   | 3.1         |   | 4.7         |   | 5.4         |   | 0.90        |   | 1.0            |   | 4.2         |   | 8.1            |   |
| Aroclor 12: 11096-82-5 mg/Kg |     |       | 1      |       | 3.3         |   | 2.1         |   | 2.8         |   | 1.1         |   | 0.52        |   | 0.61           |   | 2.7         |   | 5.8            |   |
| Aroclor 12: 37324-23-5 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.48 U      |   | 0.45 U      |   | 0.51 U      |   | 0.50 U      |   | 0.52 U         |   | 0.50 U      |   | 0.50 U         |   |
| Aroclor 12: 11100-14-2 mg/Kg |     |       | 1      |       | 0.48 U      |   | 0.48 U      |   | 0.45 U      |   | 0.51 U      |   | 0.50 U      |   | 0.52 U         |   | 0.50 U      |   | 0.50 U         |   |
| Total PCBs                   |     |       | mg/Kg  |       | 8.9         |   | 5.2         |   | 7.5         |   | 6.5         |   | 1.42        |   | 1.61           |   | 6.9         |   | 13.9           |   |

Table D-2: Stone 2014 Site Status Report  
Summary of Characterization Results, Part C

| Sample ID                      |     |         | TSCA:      |       | AOC3-CN-020-DUP |   | AOC3-CN-021 |   | AOC3-CN-022    |   | AOC3-CN-023 |   | AOC3-CN-024 |   | AOC3-CN-025 |   | AOC3-CN-026 |   | AOC3-CN-027 |   |
|--------------------------------|-----|---------|------------|-------|-----------------|---|-------------|---|----------------|---|-------------|---|-------------|---|-------------|---|-------------|---|-------------|---|
| Sample Date                    |     |         | Solid      |       | 9/3/2010        | Q | 9/3/2010    | Q | 9/3/2010       | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q |
| Analyte                        | CAS | Units   | Porous     | Media | Concrete        |   | Concrete    |   | Concrete       |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   | Concrete    |   |
| PCBs                           |     |         |            |       |                 |   |             |   |                |   |             |   |             |   |             |   |             |   |             |   |
| Aroclor 10: 12674-11-2 mg/Kg   |     |         |            | 1     | 0.5 U           |   | 0.48 U      |   | 0.5 U          |   | 0.47 U      |   | 0.51 U      |   | 0.48 U      |   | 2.4 U       |   | 4.3 U       |   |
| Aroclor 12: 11104-28-2 mg/Kg   |     |         |            | 1     | 0.5 U           |   | 0.48 U      |   | 0.5 U          |   | 0.47 U      |   | 0.51 U      |   | 0.48 U      |   | 2.4 U       |   | 4.3 U       |   |
| Aroclor 12: 11141-16-5 mg/Kg   |     |         |            | 1     | 0.5 U           |   | 0.48 U      |   | 0.5 U          |   | 0.47 U      |   | 0.51 U      |   | 0.48 U      |   | 2.4 U       |   | 4.3 U       |   |
| Aroclor 12: 53469-21-5 mg/Kg   |     |         |            | 1     | 0.5 U           |   | 0.48 U      |   | 0.5 U          |   | 0.47 U      |   | 0.51 U      |   | 0.48 U      |   | 2.4 U       |   | 4.3 U       |   |
| Aroclor 12: 12672-29-6 mg/Kg   |     |         |            | 1     | 0.5 U           |   | 0.48 U      |   | 0.5 U          |   | 0.47 U      |   | 0.51 U      |   | 0.48 U      |   | 2.4 U       |   | 4.3 U       |   |
| Aroclor 12: 11097-69-1 mg/Kg   |     |         |            | 1     | 3.2             |   | 7.1         |   | 5.6            |   | 9.4         |   | 7.4         |   | 18          |   | 40          |   | 63          |   |
| Aroclor 12: 11096-82-5 mg/Kg   |     |         |            | 1     | 2.1             |   | 2.6         |   | 2.9            |   | 10          |   | 3.2         |   | 11          |   | 8.1         |   | 13          |   |
| Aroclor 12: 37324-23-5 mg/Kg   |     |         |            | 1     | 0.5 U           |   | 0.48 U      |   | 0.5 U          |   | 0.47 U      |   | 0.51 U      |   | 0.48 U      |   | 2.4 U       |   | 4.3 U       |   |
| Aroclor 12: 11100-14-2 mg/Kg   |     |         |            | 1     | 0.5 U           |   | 0.48 U      |   | 0.5 U          |   | 0.47 U      |   | 0.51 U      |   | 0.48 U      |   | 2.4 U       |   | 4.3 U       |   |
| Total PCBs                     |     | mg/Kg   |            |       | 5.3             |   | 9.7         |   | 8.5            |   | 19.4        |   | 10.6        |   | 29          |   | 48.1        |   | 76          |   |
| Sample ID                      |     |         | TSCA:      |       | AOC3-WP-015     |   | AOC3-WP-016 |   | AOC3-WP-016-FD |   | AOC3-WP-017 |   | AOC3-CN-033 |   | AOC3-CN-034 |   | AOC3-CN-035 |   |             |   |
| Sample Date                    |     |         | Solid Non- |       | 9/3/2010        | Q | 9/3/2010    | Q | 9/3/2010       | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q | 9/3/2010    | Q |             |   |
| Analyte                        | CAS | Units   | Porous     | Media | Wipe            |   | Wipe        |   | Wipe           |   | Wipe        |   | Concrete    |   | Concrete    |   | Concrete    |   |             |   |
| PCBs                           |     |         |            |       |                 |   |             |   |                |   |             |   |             |   |             |   |             |   |             |   |
| Aroclor 10: 12674-11-2 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 0.49 U      |   | 0.48 U      |   | 0.49 U      |   |             |   |
| Aroclor 12: 11104-28-2 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 0.49 U      |   | 0.48 U      |   | 0.49 U      |   |             |   |
| Aroclor 12: 11141-16-5 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 0.49 U      |   | 0.48 U      |   | 0.49 U      |   |             |   |
| Aroclor 12: 53469-21-5 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 0.49 U      |   | 0.48 U      |   | 0.49 U      |   |             |   |
| Aroclor 12: 12672-29-6 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 0.49 U      |   | 0.48 U      |   | 0.49 U      |   |             |   |
| Aroclor 12: 11097-69-1 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 3.7         |   | 5.1         |   | 12          |   |             |   |
| Aroclor 12: 11096-82-5 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 2.1         |   | 2.7         |   | 6.5         |   |             |   |
| Aroclor 12: 37324-23-5 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 0.49 U      |   | 0.48 U      |   | 0.49 U      |   |             |   |
| Aroclor 12: 11100-14-2 µg/Wipe |     |         |            | 10    | 0.5 U           |   | 0.5 U       |   | 0.5 U          |   | 0.5 U       |   | 0.49 U      |   | 0.48 U      |   | 0.49 U      |   |             |   |
| Total PCBs                     |     | µg/Wipe |            |       |                 |   |             |   |                |   |             |   | 5.8         |   | 7.8         |   | 18.5        |   |             |   |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

mg/Kg - milligrams per kilogram

**Bold** results indicate detections of the analyte

Shaded results indicate an exceedence of the enforcement standard(s)

B - Analyte was detected in an associated blank

NE- Not Established

U - Analyte not detected; limit of quantitation listed

U - Analyte not detected; limit of quantitation listed

UJ - Analyte not detected; limit of quantitation estimated during data validation

US EPA Region III RSL - United States Environmental Protection Agency Region III Regional Screening Levels for Residential and Industrial Soils

TSCA - Toxic Substance Control Act



Table D-2: Stone 2014 Site Status Report  
Summary of Characterization Results, Parts D and F

| Sample ID    | TSCA: Solid Porous Media High |         |                         |       | AMR-DF-CN-01 | AMR-DF-CN-02 | AMR-DF-CN-03    | AMR-DF-CN-03-FD | AMR-DF-CN-04 | AMR-DF-CN-05 | AMR-DF-CN-06 |
|--------------|-------------------------------|---------|-------------------------|-------|--------------|--------------|-----------------|-----------------|--------------|--------------|--------------|
| Sample Date  |                               |         |                         |       | 2/11/2011    | 2/11/2011    | 2/11/2011       | 2/11/2011       | 2/11/2011    | 2/11/2011    | 2/11/2011    |
| Analyte      | CAS                           | Units   | Occupancy Walkaway      | Media | Concrete     | Concrete     | Concrete        | Concrete        | Concrete     | Concrete     | Concrete     |
| PCBs         |                               |         |                         |       |              |              |                 |                 |              |              |              |
| Aroclor 1016 | 12674-11-2                    | mg/Kg   | 1                       |       | 0.49 U       | 0.48 U       | 0.99 U          | 0.99 U          | 0.5 U        | 0.49 U       | 0.5 U        |
| Aroclor 1221 | 11104-28-2                    | mg/Kg   | 1                       |       | 0.49 U       | 0.48 U       | 0.99 U          | 0.99 U          | 0.5 U        | 0.49 U       | 0.5 U        |
| Aroclor 1232 | 11141-16-5                    | mg/Kg   | 1                       |       | 0.49 U       | 0.48 U       | 0.99 U          | 0.99 U          | 0.5 U        | 0.49 U       | 0.5 U        |
| Aroclor 1242 | 53469-21-9                    | mg/Kg   | 1                       |       | 0.49 U       | 0.48 U       | 0.99 U          | 0.99 U          | 0.5 U        | 0.49 U       | 0.5 U        |
| Aroclor 1248 | 12672-29-6                    | mg/Kg   | 1                       |       | 0.49 U       | 0.48 U       | 0.99 U          | 0.99 U          | 0.5 U        | 0.49 U       | 0.5 U        |
| Aroclor 1254 | 11097-69-1                    | mg/Kg   | 1                       |       | 5.6          | 0.76         | 4.7             | 3.3             | 2.7          | 1.8          | 10           |
| Aroclor 1260 | 11096-82-5                    | mg/Kg   | 1                       |       | 2.6          | 0.48 U       | 3.2             | 2.4             | 1.5          | 0.91         | 3.1          |
| Aroclor 1262 | 37324-23-5                    | mg/Kg   | 1                       |       | 0.49 U       | 0.48 U       | 0.99 U          | 0.99 U          | 0.5 U        | 0.49 U       | 0.5 U        |
| Aroclor 1268 | 11100-14-4                    | mg/Kg   | 1                       |       | 0.49 U       | 0.48 U       | 0.99 U          | 0.99 U          | 0.5 U        | 0.49 U       | 0.5 U        |
| Total        |                               | mg/Kg   |                         |       | 8.2          | 0.76         | 7.9             | 5.7             | 4.2          | 2.71         | 13.1         |
| Sample ID    | TSCA: Solid Porous Media High |         |                         |       | AMR-DF-WD-01 | AMR-DF-WD-02 | AMR-DF-WD-02-FD | AMR-DF-WD-03    |              |              |              |
| Sample Date  |                               |         |                         |       | 2/11/2011    | 2/11/2011    | 2/11/2011       | 2/11/2011       |              |              |              |
| Analyte      | CAS                           | Units   | Occupancy Cap           | Media | Wood         | Wood         | Wood            | Wood            |              |              |              |
| PCBs         |                               |         |                         |       |              |              |                 |                 |              |              |              |
| Aroclor 1016 | 12674-11-2                    | mg/Kg   | 10                      |       | 1.8 U        | 1.1 U        | 1.2 U           | 1.0 U           |              |              |              |
| Aroclor 1221 | 11104-28-2                    | mg/Kg   | 10                      |       | 1.8 U        | 1.1 U        | 1.2 U           | 1.0 U           |              |              |              |
| Aroclor 1232 | 11141-16-5                    | mg/Kg   | 10                      |       | 1.8 U        | 1.1 U        | 1.2 U           | 1.0 U           |              |              |              |
| Aroclor 1242 | 53469-21-9                    | mg/Kg   | 10                      |       | 1.8 U        | 1.1 U        | 1.2 U           | 1.0 U           |              |              |              |
| Aroclor 1248 | 12672-29-6                    | mg/Kg   | 10                      |       | 1.8 U        | 1.1 U        | 1.2 U           | 1.0 U           |              |              |              |
| Aroclor 1254 | 11097-69-1                    | mg/Kg   | 10                      |       | 16           | 6.8          | 4.9             | 4.3             |              |              |              |
| Aroclor 1260 | 11096-82-5                    | mg/Kg   | 10                      |       | 3.5          | 3.1          | 2.5             | 1.5             |              |              |              |
| Aroclor 1262 | 37324-23-5                    | mg/Kg   | 10                      |       | 1.8 U        | 1.1 U        | 1.2 U           | 1.0 U           |              |              |              |
| Aroclor 1268 | 11100-14-4                    | mg/Kg   | 10                      |       | 1.8 U        | 1.1 U        | 1.2 U           | 1.0 U           |              |              |              |
| Total        |                               | mg/Kg   |                         |       | 19.5         | 9.9          | 7.4             | 5.8             |              |              |              |
| Sample ID    | TSCA: Solid Non-Porous Media  |         |                         |       | AMR-DF-WP-01 | AMR-DF-WP-02 |                 |                 |              |              |              |
| Sample Date  |                               |         |                         |       | 2/11/2011    | 2/11/2011    |                 |                 |              |              |              |
| Analyte      | CAS                           | Units   | High Occupancy Walkaway | Media | Wipe         | Wipe         |                 |                 |              |              |              |
| PCBs         |                               |         |                         |       |              |              |                 |                 |              |              |              |
| Aroclor 1016 | 12674-11-2                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1221 | 11104-28-2                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1232 | 11141-16-5                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1242 | 53469-21-9                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1248 | 12672-29-6                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1254 | 11097-69-1                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1260 | 11096-82-5                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1262 | 37324-23-5                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Aroclor 1268 | 11100-14-4                    | µg/Wipe | 10                      |       | 5 U          | 5 U          |                 |                 |              |              |              |
| Total        |                               | µg/Wipe |                         |       |              |              |                 |                 |              |              |              |

Table D-2: Stone 2014 Site Status Report  
Summary of Characterization Results, Parts D and F

| Sample ID    |            |       | US EPA Region III | US EPA Region   |       | DF-101    |   |  | DF-102    |   |  |
|--------------|------------|-------|-------------------|-----------------|-------|-----------|---|--|-----------|---|--|
| Sample Date  |            |       | RSL Residential   | III RSL         |       | 7/21/2011 | Q |  | 7/21/2011 | Q |  |
| Analyte      | CAS        | Units | Soil              | Industrial Soil | Media | Soil      |   |  | Soil      |   |  |
| PCBs         |            |       |                   |                 |       |           |   |  |           |   |  |
| Aroclor 1016 | 12674-11-2 | mg/Kg | 3.9               | 21              |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1221 | 11104-28-2 | mg/Kg | 0.14              | 0.54            |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1232 | 11141-16-5 | mg/Kg | 0.14              | 0.54            |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1242 | 53469-21-9 | mg/Kg | 0.22              | 0.74            |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1248 | 12672-29-6 | mg/Kg | 0.22              | 0.74            |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1254 | 11097-69-1 | mg/Kg | 0.22              | 0.74            |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1260 | 11096-82-5 | mg/Kg | 0.22              | 0.74            |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1262 | 37324-23-5 | mg/Kg | NE                | NE              |       | 0.058     | U |  | 0.054     | U |  |
| Aroclor 1268 | 11100-14-4 | mg/Kg | NE                | NE              |       | 0.058     | U |  | 0.054     | U |  |
| Total        |            | mg/Kg |                   |                 |       |           |   |  |           |   |  |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

mg/Kg - milligrams per kilogram

**Bold** results indicate detections of the analyte

Shaded results indicate an exceedence of the enforcement standard(s)

NE- Not Established

U - Analyte not detected; limit of quantitation listed

US EPA Region III RSL - United States Environmental Protection Agency Region III Regional Screening Levels for Residential and Industrial Soils

TSCA - Toxic Substance Control Act

Table D-2: Stone 2014 Site Status Report  
Summary of Characterization Results, Offices

| Sample ID    | TSCA: Solid Porous Media High     |         |                  |                 | AOC1-CN-01    | AOC1-CN-03 | AOC1-CN-04 | AOC1-CN-05 | AOC1-CN-06 | AOC1-CN-07 | AOC1-CN-09 | AOC1-CN-11 | AOC1-CN-11F | AOC1-CN-12 |   |          |   |          |   |          |   |          |   |          |   |
|--------------|-----------------------------------|---------|------------------|-----------------|---------------|------------|------------|------------|------------|------------|------------|------------|-------------|------------|---|----------|---|----------|---|----------|---|----------|---|----------|---|
| Sample Date  | CAS                               | Units   | Occupancy        | Walkaway        | Media         | 9/2/2010   | Q          | 9/2/2010   | Q          | 9/2/2010   | Q          | 9/2/2010   | Q           | 9/3/2010   | Q | 9/3/2010 | Q | 9/3/2010 | Q | 9/3/2010 | Q |          |   |          |   |
| Analyte      | CAS                               | Units   |                  |                 |               | Concrete   |            | Concrete   |            | Concrete   |            | Concrete   |             | Concrete   |   | Concrete |   | Concrete |   | Concrete |   |          |   |          |   |
| PCBs         |                                   |         |                  |                 |               |            |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1016 | 12674-11-2                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.05     | U |
| Aroclor 1221 | 11104-28-2                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.05     | U |
| Aroclor 1232 | 11141-16-5                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.05     | U |
| Aroclor 1242 | 53469-21-9                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.05     | U |
| Aroclor 1248 | 12672-29-6                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.05     | U |
| Aroclor 1254 | 11097-69-1                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.87     |   |
| Aroclor 1260 | 11096-82-5                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.85     |   |
| Aroclor 1262 | 37324-23-5                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.05     | U |
| Aroclor 1268 | 11100-14-4                        | mg/Kg   |                  |                 | 1             | 0.46       | U          | 0.47       | U          | 0.44       | U          | 0.40       | U           | 0.50       | U | 0.43     | U | 0.48     | U | 0.47     | U | 0.46     | U | 0.05     | U |
| Total        |                                   | mg/Kg   | 1.72             |                 |               |            |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Sample ID    | TSCA: Solid Non-Porous Media High |         |                  |                 | AOC1-WP-013   |            | AOC1-WP-02 | AOC1-WP-08 | AOC1-WP-10 |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Sample Date  | CAS                               | Units   | Occupancy        | Walkaway        | Media         | 9/3/2010   | Q          | 9/2/2010   | Q          | 9/3/2010   | Q          | 9/3/2010   | Q           | 9/3/2010   | Q | 9/3/2010 | Q | 9/3/2010 | Q | 9/3/2010 | Q | 9/3/2010 | Q | 9/3/2010 | Q |
| Analyte      | CAS                               | Units   |                  |                 |               | Wipe       |            | Wipe       |            | Wipe       |            | Wipe       |             | Wipe       |   | Wipe     |   | Wipe     |   | Wipe     |   | Wipe     |   | Wipe     |   |
| PCBs         |                                   |         |                  |                 |               |            |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1016 | 12674-11-2                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1221 | 11104-28-2                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1232 | 11141-16-5                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1242 | 53469-21-9                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1248 | 12672-29-6                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1254 | 11097-69-1                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1260 | 11096-82-5                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.57       |            | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1262 | 37324-23-5                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1268 | 11100-14-4                        | µg/Wipe |                  |                 | 10            |            |            | 0.5        | U          | 0.5        | U          | 0.5        | U           | 0.5        | U |          |   |          |   |          |   |          |   |          |   |
| Total        |                                   | µg/Wipe | 0.57             |                 |               |            |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Sample ID    | US EPA Region III RSL             |         |                  |                 | 1953 SSD Soil |            |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Sample Date  | CAS                               | Units   | Residential Soil | Industrial Soil | Media         | 4/15/2011  | Q          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Analyte      | CAS                               | Units   |                  |                 |               | Soil       |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| PCBs         |                                   |         |                  |                 |               |            |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1016 | 12674-11-2                        | mg/kg   | 3.9              | 21              |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1221 | 11104-28-2                        | mg/kg   | 0.14             | 0.54            |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1232 | 11141-16-5                        | mg/kg   | 0.14             | 0.54            |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1242 | 53469-21-9                        | mg/kg   | 0.22             | 0.74            |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1248 | 12672-29-6                        | mg/kg   | 0.22             | 0.74            |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1254 | 11097-69-1                        | mg/kg   | 0.22             | 0.74            |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1260 | 11096-82-5                        | mg/kg   | 0.22             | 0.74            |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1262 | 37324-23-5                        | mg/kg   | NE               | NE              |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Aroclor 1268 | 11100-14-4                        | mg/kg   | NE               | NE              |               | 0.051      | U          |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |
| Total        |                                   | mg/kg   |                  |                 |               |            |            |            |            |            |            |            |             |            |   |          |   |          |   |          |   |          |   |          |   |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

mg/Kg - milligrams per kilogram

**Bold** results indicate detections of the analyte

Shaded results indicate an exceedence of the enforcement standard(s)

NE- Not Established

U - Analyte not detected; limit of quantitation listed

US EPA Region III RSL - United States Environmental Protection Agency Region III Regional Screening Levels for Residential and Industrial Soils

TSCA - Toxic Substance Control Act

Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Part A

| Sample ID    | US EPA Region III RSL Residential |         |                         |       | US EPA Region III RSL Industrial |       |       |       | Part A South 1 |   | Part A South 2 |   | Part A South 3 |   | Part A South 4 |   | Part A South 5 |   | Part A South 6 |   | Part A SSL 1 |   | Part A SSL 1-FD |   | Part A SSL 2         |   | Part A SSL 3 |   |         |
|--------------|-----------------------------------|---------|-------------------------|-------|----------------------------------|-------|-------|-------|----------------|---|----------------|---|----------------|---|----------------|---|----------------|---|----------------|---|--------------|---|-----------------|---|----------------------|---|--------------|---|---------|
| Sample Date  |                                   |         |                         |       |                                  |       |       |       | 6/22/2011      | Q | 6/22/2011      | Q | 6/22/2011      | Q | 6/22/2011      | Q | 6/22/2011      | Q | 6/22/2011      | Q | 6/22/2011    | Q | 6/22/2011       | Q | 6/22/2011            | Q | 6/22/2011    | Q |         |
| Analyte      | CAS                               | Units   | Soil                    | Media | Soil                             | Media | Soil  | Media | Soil           | Q | Soil           | Q | Soil           | Q | Soil           | Q | Soil           | Q | Soil           | Q | Soil         | Q | Soil            | Q | Soil                 | Q | Soil         | Q |         |
| PCBs         |                                   |         |                         |       |                                  |       |       |       |                |   |                |   |                |   |                |   |                |   |                |   |              |   |                 |   |                      |   |              |   |         |
| Aroclor 1016 | 12674-11-2                        | mg/kg   | 3.9                     |       | 21                               |       |       |       | 0.056 U        |   | 0.055 U        |   | 0.052 U        |   | 0.051 U        |   | 0.051 U        |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1221 | 11104-28-2                        | mg/kg   | 0.14                    |       | 0.54                             |       |       |       | 0.056 U        |   | 0.055 U        |   | 0.052 U        |   | 0.051 U        |   | 0.051 U        |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1232 | 11141-16-5                        | mg/kg   | 0.14                    |       | 0.54                             |       |       |       | 0.056 U        |   | 0.055 U        |   | 0.052 U        |   | 0.051 U        |   | 0.051 U        |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1242 | 53469-21-9                        | mg/kg   | 0.22                    |       | 0.74                             |       |       |       | 0.056 U        |   | 0.055 U        |   | 0.052 U        |   | 0.051 U        |   | 0.051 U        |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1248 | 12672-29-6                        | mg/kg   | 0.22                    |       | 0.74                             |       |       |       | 0.056 U        |   | 0.055 U        |   | 0.052 U        |   | 0.051 U        |   | 0.051 U        |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1254 | 11097-69-1                        | mg/kg   | 0.22                    |       | 0.74                             |       |       |       | 0.056 U        |   | 0.44           |   | 0.052 U        |   | 0.49           |   | 0.082          |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1260 | 11096-82-5                        | mg/kg   | 0.22                    |       | 0.74                             |       |       |       | 0.056 U        |   | 0.23           |   | 0.052 U        |   | 0.12           |   | 0.058          |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1262 | 37324-23-5                        | mg/kg   | NE                      |       | NE                               |       |       |       | 0.056 U        |   | 0.055 U        |   | 0.052 U        |   | 0.051 U        |   | 0.051 U        |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Aroclor 1268 | 11100-14-4                        | mg/kg   | NE                      |       | NE                               |       |       |       | 0.056 U        |   | 0.055 U        |   | 0.052 U        |   | 0.051 U        |   | 0.051 U        |   | 0.053 U        |   | 0.060 U      |   | 0.057 U         |   | 0.051 U              |   | 0.053 U      |   | 0.053 U |
| Total PCBs   |                                   |         |                         |       |                                  |       |       |       |                |   |                |   |                |   |                |   |                |   |                |   |              |   |                 |   |                      |   |              |   |         |
| 0.670.610.14 |                                   |         |                         |       |                                  |       |       |       |                |   |                |   |                |   |                |   |                |   |                |   |              |   |                 |   |                      |   |              |   |         |
| Sample ID    | TSCA: Solid Non-Porous Media      |         |                         |       | Belt                             |       |       |       | Hopper         |   | Part A SSL 4   |   | Part A SSL 5   |   | Part A SSL 6   |   | Part A SSL 10  |   | Part A SSL 7   |   | Part A SSL 8 |   | Part A SSL 9    |   | Part A Sub Slab Pipe |   |              |   |         |
| Sample Date  |                                   |         |                         |       | 6/21/2011                        |       |       |       | 6/21/2011      |   | 6/22/2011      |   | 6/22/2011      |   | 6/22/2011      |   | 5/3/2011       |   | 5/3/2011       |   | 5/3/2011     |   | 5/3/2011        |   | 4/22/2011            |   |              |   |         |
| Analyte      | CAS                               | Units   | High Occupancy Walkaway | Media | Wipe                             | Q     | Wipe  | Q     | Soil           | Q | Soil           | Q | Soil           | Q | Soil           | Q | Soil           | Q | Soil           | Q | Soil         | Q | Soil            | Q | Soil                 | Q |              |   |         |
| PCBs         |                                   |         |                         |       |                                  |       |       |       |                |   |                |   |                |   |                |   |                |   |                |   |              |   |                 |   |                      |   |              |   |         |
| Aroclor 1016 | 12674-11-2                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1221 | 11104-28-2                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1232 | 11141-16-5                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1242 | 53469-21-9                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1248 | 12672-29-6                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1254 | 11097-69-1                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1260 | 11096-82-5                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 1.20            |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1262 | 37324-23-5                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Aroclor 1268 | 11100-14-4                        | µg/Wipe | 10                      |       | 0.5 U                            |       | 0.5 U |       | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.051 U        |   | 0.052 U        |   | 0.063 U        |   | 0.056 U      |   | 0.063 U         |   | 0.48 U               |   | 0.48 U       |   |         |
| Total PCBs   |                                   |         |                         |       |                                  |       |       |       |                |   |                |   |                |   |                |   |                |   |                |   |              |   |                 |   |                      |   |              |   |         |
| NE1.20       |                                   |         |                         |       |                                  |       |       |       |                |   |                |   |                |   |                |   |                |   |                |   |              |   |                 |   |                      |   |              |   |         |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

mg/kg - milligrams per kilogram

Shaded results indicate an exceedance of the enforcement standard(s)

B - Analyte was detected in an associated blank

U - Analyte not detected, limit of quantitation listed

UJ - Analyte not detected, limit of quantitation estimated during data validation

US EPA Region III RSL - United States Environmental Protection Agency Region III Regional Screening Levels for Residential and Industrial Soils

TSCA - Toxic Substance Control Act

Table D-3: Stone 2014 Site Status Report

## Summary of Post Remedy Results, Part B

| Sample ID    | TSCA: Solid Non-Porous Media High |         |           |       | AMR-MS-WP03 | AMR-MS-WP04 | Part B-1 | Part B-2 | Part B-3 | PartB-FL-WP1 | PartB-FL-WP1-FD | PartB-FL-WP2 | PartB-FL-WP3 | PartB-WL-WP4 |
|--------------|-----------------------------------|---------|-----------|-------|-------------|-------------|----------|----------|----------|--------------|-----------------|--------------|--------------|--------------|
| Sample Date  | CAS                               | Units   | Occupancy | Media | 12/21/2011  | 12/21/2011  | 4/3/2012 | 4/3/2012 | 4/3/2012 | 4/19/2012    | 4/19/2012       | 4/19/2012    | 4/19/2012    | 4/19/2012    |
| Analyte      |                                   |         |           |       | Wipe        | Wipe        | Wipe     | Wipe     | Wipe     | Wipe         | Wipe            | Wipe         | Wipe         | Wipe         |
| <b>PCBs</b>  |                                   |         |           |       |             |             |          |          |          |              |                 |              |              |              |
| Aroclor 1016 | 12674-11-2                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1221 | 11104-28-2                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1232 | 11141-16-5                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1242 | 53469-21-9                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1248 | 12672-29-6                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1254 | 11097-69-1                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1260 | 11096-82-5                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1262 | 37324-23-5                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |
| Aroclor 1268 | 11100-14-4                        | µg/WIPE | 10        |       | 0.5 U       | 0.5 U       | 0.5 U    | 0.5 U    | 0.5 U    | 0.5 U        | 0.5 U           | 0.5 U        | 0.5 U        | 0.5 U        |

| Sample ID                     | AIR-PartB |         |                       |       | AIR-PartB-FD |
|-------------------------------|-----------|---------|-----------------------|-------|--------------|
| Sample Date                   | 4/24/2012 | Q       | 4/24/2012             | Q     |              |
| Analyte                       | CAS       | Units   | Site Action Limit     | Media | Air          |
| <b>PCB Congeners/Homologs</b> |           |         |                       |       |              |
| c16-Bz#153                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| c16-Bz#155                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| c16-Bz#163/#160               |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         |
| c16-Bz#165                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl10-Bz#209                   |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl1-Bz#1                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl1-Bz#2                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl1-Bz#3                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#11                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#12                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#13                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#14                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#15                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#4/#10                  |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         |
| Cl2-Bz#5                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#6                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#7                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#8                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl2-Bz#9                      |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#36                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#16                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#17                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#18                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#19                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#21/#20                 |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         |
| Cl3-Bz#22                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#23                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#24                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#25                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#27                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#28                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#29                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#30                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#31                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#32                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#33                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#34                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#35                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#37                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#38                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl3-Bz#39                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl4-8Z#63                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |
| Cl4-8BZ#66                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         |

**Table D-3: Stone 2014 Site Status Report**  
Summary of Post Remedy Results, Part B

| Sample ID                     | AIR-PartB |         |                       |       | AIR-PartB-FD |      |
|-------------------------------|-----------|---------|-----------------------|-------|--------------|------|
| Sample Date                   | 4/24/2012 |         |                       |       | 4/24/2012    |      |
| Analyte                       | CAS       | Units   | Site Action Limit     | Media | Air          | Q    |
| <b>PCB Congeners/Homologs</b> |           |         |                       |       |              |      |
| Cl4-Bz#40                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#41                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#42                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#43                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| cl4-Bz#44                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#45                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#47                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#48                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#49                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| cl4-Bz#50                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#51                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#52                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#53                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| cl4-Bz#54                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#55                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#56                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#57                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#59                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#60                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#61                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#65/#75/#62             |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U         | 30 U |
| Cl4-Bz#67/#58                 |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| cl4-Bz#68/#64                 |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl4-Bz#69                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#70                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#71                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#72                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#73/#46                 |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl4-Bz#74                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#76                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#77                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#78                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#79                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#80                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl4-Bz#81                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#1 10                   |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#100                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#101/#90                |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl5-Bz#102                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| cl5-Bz#103                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#104                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| cl5-Bz#105                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#106                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#107/#123               |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl5-Bz#108                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| cl5-Bz#113                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#114                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#115                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#117                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#120                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#121/#95/#88            |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U         | 30 U |
| Cl5-Bz#122                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#124                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#126                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#127                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |



**Table D-3: Stone 2014 Site Status Report**  
Summary of Post Remedy Results, Part B

| Sample ID                     | AIR-PartB |         |                       |       | AIR-PartB-FD |      |
|-------------------------------|-----------|---------|-----------------------|-------|--------------|------|
| Sample Date                   | 4/24/2012 |         |                       |       | 4/24/2012    |      |
| Analyte                       | CAS       | Units   | Site Action Limit     | Media | Air          | Q    |
| <b>PCB Congeners/Homologs</b> |           |         |                       |       |              |      |
| Cl5-Bz#82                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#83/#125/#112           |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U         | 30 U |
| Cl5-Bz#85                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#86/#109                |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl5-Bz#87/#111                |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl5-Bz#89/#84                 |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl5-Bz#91                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#92                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#93                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#96                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#97                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#98                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl5-Bz#99                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#128                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#129/#158               |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl6-Bz#130/#164               |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl6-Bz#131                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#132                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#133                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#134                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#135                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#136                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#137                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#138                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#140                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#141                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#142                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#143/#139               |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl6-Bz#144                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#145                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#146                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#147/#149               |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl6-Bz#148                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#150                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#151                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#152                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#154                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#156                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#157                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#159                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#161                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#162                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#166                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#167                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#168                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl6-Bz#169                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#186                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#170                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#171                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#172                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#173                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#174                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#176                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#177                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#178                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |

**Table D-3: Stone 2014 Site Status Report**  
Summary of Post Remedy Results, Part B

| Sample ID                     | AIR-PartB |         |                       |       | AIR-PartB-FD |      |
|-------------------------------|-----------|---------|-----------------------|-------|--------------|------|
| Sample Date                   | 4/24/2012 |         |                       |       | 4/24/2012    |      |
| Analyte                       | CAS       | Units   | Site Action Limit     | Media | Air          | Q    |
| <b>PCB Congeners/Homologs</b> |           |         |                       |       |              |      |
| Cl7-Bz#179                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#180                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#181                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#182/#175               |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl7-Bz#183                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#184                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#185                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#187                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#188                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#189                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| cl7-Bz#190                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#191                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#192                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl7-Bz#193                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl8-Bz#195                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl8-Bz#196                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl8-Bz#198                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl8-Bz#199                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl8-Bz#201                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl8-Bz#202                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl8-Bz#204/#200-CAL           |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U         | 20 U |
| Cl8-Bz#205                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl9-Bz#203                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl9-Bz#206                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl9-Bz#207                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Cl9-Bz#208                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| ClB-Bz#194                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Clg-Bz#197                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| ClS-8.2#26                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| ClS-Bz#116                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| clS-Bz#118                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| ClS-Bz#119                    |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| ClS-Bz#94                     |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Decachlorobiphenyl            |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Dichlorobiphenyls             |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Heptachlorobiphenyls          |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Hexachlorobiphenyls           |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Monochlorobiphenyls           |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Nonachlorobiphenyls           |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Octachlorobiphenyls           |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Pentachlorobiphenyls          |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Tetrachlorobiphenyls          |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Total Homologs                |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |
| Trichlorobiphenyls            |           | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U         | 10 U |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

ng/cart - nanogram per cartridge

Shaded results indicate an exceedence of the enforcement standard(s)

B - Analyte was detected in an associated blank

UJ - Analyte not detected; limit of quantitation estimated during data validation

TSCA - Toxic Substance Control Act

U- Analyte not detected; limit of quantitation listed

**Table D-3: Stone 2014 Site Status Report**  
Summary of Post Remedy Results, Parts D and F

| Sample ID    |            | TSCA: Solid Non-  |           |       | Lower Level Garage 1 |   | Lower Level Garage 2 |   |
|--------------|------------|-------------------|-----------|-------|----------------------|---|----------------------|---|
| Sample Date  |            | Porous Media High |           |       | 3/16/2012            |   | 3/16/2012            |   |
| Analyte      | CAS        | Units             | Occupancy | Media | Wipe                 | Q | Wipe                 | Q |
| <b>PCBs</b>  |            |                   |           |       |                      |   |                      |   |
| Aroclor 1016 | 12674-11-2 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1221 | 11104-28-2 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1232 | 11141-16-5 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1242 | 53469-21-9 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1248 | 12672-29-6 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1254 | 11097-69-1 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1260 | 11096-82-5 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1262 | 37324-23-5 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |
| Aroclor 1268 | 11100-14-4 | µg/Wipe           | 10        |       | 0.5 U                |   | 0.5 U                |   |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

Shaded results indicate an exceedence of the enforcement standard(s)

NE- Not Established

U - Analyte not detected; limit of quantitation listed

TSCA - Toxic Substance Control Act

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID    |            |         | TSCA: Solid Non-Porous Media High |       | E3-FL-WP1<br>4/23/2012 |   | E4-FL-WP1<br>4/23/2012 |     | AIR-MECHANICAL ROOM1<br>4/24/2012 |     |
|--------------|------------|---------|-----------------------------------|-------|------------------------|---|------------------------|-----|-----------------------------------|-----|
| Sample Date  | CAS        | Units   | Occupancy                         | Media | Wipe                   | Q | Wipe                   | Q   | Units                             | Air |
| <b>PCBs</b>  |            |         |                                   |       |                        |   |                        |     |                                   |     |
| Aroclor 1016 | 12674-11-2 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1221 | 11104-28-2 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1232 | 11141-16-5 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1242 | 53469-21-9 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1248 | 12672-29-6 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1254 | 11097-69-1 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1260 | 11096-82-5 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1262 | 37324-23-5 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Aroclor 1268 | 11100-14-4 | µg/Wipe | 10                                |       | 0.5                    | U |                        | 0.5 | U                                 |     |
| Total PCBs   |            | µg/Wipe |                                   |       |                        |   |                        |     |                                   |     |

| Sample ID                     |     |         |                       |       | AIR-MECHANICAL ROOM1<br>4/24/2012 |      |
|-------------------------------|-----|---------|-----------------------|-------|-----------------------------------|------|
| Sample Date                   | CAS | Units   | Site Action Limit     | Media | Air                               | Q    |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |                                   |      |
| c16-Bz#153                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| c16-BZ#155                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| c16-Bz#163/#160               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 20 U |
| c16-Bz#165                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl10-Bz#209                   |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl1-Bz#1                      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl1-Bz#2                      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| cL1-BZ#3                      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl2-Bz#11                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl2-Bz#12                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl2-Bz#13                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl2-Bz#14                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| cl2-Bz#15                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl2-Bz#4/#10                  |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 20 U |
| Cl2-Bz#5                      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl2-Bz#6                      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |
| Cl2-Bz#7                      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       |                                   | 10 U |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID              |     |         | AIR-MECHANICAL ROOM1  |       |      |
|------------------------|-----|---------|-----------------------|-------|------|
| Sample Date            |     |         | 4/24/2012             |       | Q    |
| Analyte                | CAS | Units   | Site Action Limit     | Media | Air  |
| PCB Congeners/Homologs |     |         |                       |       |      |
| Cl2-Bz#8               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl2-Bz#9               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-82#36              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#16              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#17              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#18              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#19              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#21/#20          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl3-Bz#22              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#23              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#24              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#25              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#27              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#28              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#29              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#30              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#31              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#32              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#33              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#34              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#35              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#37              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#38              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl3-Bz#39              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-82#63              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-8BZ#66             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#40              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#41              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#42              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#43              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID              |     |         | AIR-MECHANICAL ROOM1  |       |      |
|------------------------|-----|---------|-----------------------|-------|------|
| Sample Date            |     |         | 4/24/2012             |       | Q    |
| Analyte                | CAS | Units   | Site Action Limit     | Media | Air  |
| PCB Congeners/Homologs |     |         |                       |       |      |
| cl4-Bz#44              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#45              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#47              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#48              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#49              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl4-Bz#50              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#51              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#52              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#53              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl4-Bz#54              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#55              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-BZ#56              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#57              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#59              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-BZ#60              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#61              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#65/#75/#62      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U |
| Cl4-Bz#67/#58          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| cl4-Bz#68/#64          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl4-Bz#69              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#70              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#71              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#72              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#73/#46          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl4-Bz#74              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#76              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#77              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#78              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#79              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#80              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |



Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID              |     |         | AIR-MECHANICAL ROOM1  |       |      |
|------------------------|-----|---------|-----------------------|-------|------|
| Sample Date            |     |         | 4/24/2012             |       | Q    |
| Analyte                | CAS | Units   | Site Action Limit     | Media | Air  |
| PCB Congeners/Homologs |     |         |                       |       |      |
| Cl4-Bz#81              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#1 10            |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#100             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#101/#90         |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#102             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl5-Bz#103             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#104             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl5-Bz#105             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#106             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#107/#123        |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#108             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl5-Bz#113             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#114             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#115             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#117             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#120             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#121/#95/#88     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U |
| Cl5-Bz#122             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#124             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#126             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#127             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl5-Bz#82              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#83/#125/#112    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U |
| Cl5-Bz#85              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#86/#109         |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#87/#111         |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#89/#84          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#91              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#92              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#93              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID                     |     |         | AIR-MECHANICAL ROOM1  |       |      |
|-------------------------------|-----|---------|-----------------------|-------|------|
| Sample Date                   |     |         | 4/24/2012 Q           |       |      |
| Analyte                       | CAS | Units   | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |      |
| Cl5-Bz#96                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#97                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#98                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#99                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#128                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#129/#158               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#130/#164               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#131                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#132                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#133                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#134                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#135                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#136                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#137                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#138                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#140                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#141                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#142                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#143/#139               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#144                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#145                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#146                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#147/#149               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#148                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#150                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#151                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#152                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#154                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#156                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#157                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID              |     |         | AIR-MECHANICAL ROOM1  |       |      |
|------------------------|-----|---------|-----------------------|-------|------|
| Sample Date            |     |         | 4/24/2012             |       | Q    |
| Analyte                | CAS | Units   | Site Action Limit     | Media | Air  |
| PCB Congeners/Homologs |     |         |                       |       |      |
| Cl6-Bz#159             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#161             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#162             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#166             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#167             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#168             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl6-Bz#169             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-82#186             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#170             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#171             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#172             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#173             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#174             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#176             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#177             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl7-Bz#178             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#179             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#180             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#181             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#182/#175        |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl7-Bz#183             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#184             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#185             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#187             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#188             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#189             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl7-Bz#190             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#191             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#192             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#193             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID              |     |         | AIR-MECHANICAL ROOM1  |       |      |
|------------------------|-----|---------|-----------------------|-------|------|
| Sample Date            |     |         | 4/24/2012             |       | Q    |
| Analyte                | CAS | Units   | Site Action Limit     | Media | Air  |
| PCB Congeners/Homologs |     |         |                       |       |      |
| Cl8-Bz#195             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#196             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#198             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#199             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#201             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#202             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#204/#200-CAL    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl8-Bz#205             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-Bz#203             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-BZ#206             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-Bz#207             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-Bz#208             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| ClB-Bz#194             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Clg-Bz#197             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| ClS-8.2#26             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| ClS-Bz#116             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| clS-Bz#118             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| ClS-Bz#119             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| ClS-Bz#94              |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Decachlorobiphenyl     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Dlchlorobiphenyls      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Heptachlorobiphenyls   |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Hexachlorobiphenyls    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Monochlorobiphenyls    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Nonachlorobiphenyls    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Octachlorobiphenyls    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Pentachlorobiphenyls   |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Tetrachlorobiphenyls   |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Total Homologs         |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Trichlorobiphenyls     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U |

### Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part E

| Sample ID              |     |       |                   |       | AIR-MECHANICAL ROOM1 |   |
|------------------------|-----|-------|-------------------|-------|----------------------|---|
| Sample Date            |     |       |                   |       | 4/24/2012            | Q |
| Analyte                | CAS | Units | Site Action Limit | Media | Air                  |   |
| PCB Congeners/Homologs |     |       |                   |       |                      |   |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

ng/cart - nanograms per cartridge

NE- Not Established

U - Analyte not detected; limit of quantitation listed

TSCA - Toxic Substance Control Act

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

| Sample ID              | TSCA: Solid Non-Porous Media High |         |                       |       | AIR-GH     | AMR-MS-WP01 | AMR-MS-WP01-FD | AMR-MS-WP02 |
|------------------------|-----------------------------------|---------|-----------------------|-------|------------|-------------|----------------|-------------|
| Sample Date            |                                   |         |                       |       | 12/22/2011 | 12/21/2011  | 12/21/2011     | 12/21/2011  |
| Analyte                | CAS                               | Units   | Occupancy             | Media | Air        | Wipe        | Wipe           | Wipe        |
| PCBs                   |                                   |         |                       |       |            |             |                |             |
| Aroclor 1016           | 12674-11-2                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1221           | 11104-28-2                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1232           | 11141-16-5                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1242           | 53469-21-9                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1248           | 12672-29-6                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1254           | 11097-69-1                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1260           | 11096-82-5                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1262           | 37324-23-5                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Aroclor 1268           | 11100-14-4                        | µg/wipe | 10                    |       |            | 0.5 U       | 0.5 U          | 0.5 U       |
| Total PCBs             |                                   | µg/wipe |                       |       |            |             |                |             |
| Sample ID              |                                   |         |                       |       | AIR-GH     |             |                |             |
| Sample Date            |                                   |         |                       |       | 12/22/2011 |             |                |             |
| Analyte                | CAS                               | Units   | Site Action Level     | Media | Air        |             |                |             |
| PCB Congeners/Homologs |                                   |         |                       |       |            |             |                |             |
| c16-Bz#153             |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| c16-BZ#155             |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| c16-Bz#163/#160        |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U       |             |                |             |
| c16-Bz#165             |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl10-Bz#209            |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl1-Bz#1               |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl1-Bz#2               |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| cL1-BZ#3               |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#11              |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#12              |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#13              |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#14              |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| cl2-Bz#15              |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#4/#10           |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U       |             |                |             |
| Cl2-Bz#5               |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#6               |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#7               |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |
| Cl2-Bz#8               |                                   | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U       |             |                |             |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

| Sample ID<br>Sample Date      |     |         |                       |       | AIR-GH<br>12/22/2011 Q |  |
|-------------------------------|-----|---------|-----------------------|-------|------------------------|--|
| Analyte                       | CAS | Units   | Site Action Level     | Media | Air                    |  |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |                        |  |
| Cl2-Bz#9                      |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-82#36                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#16                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#17                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#18                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#19                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#21/#20                 |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl3-Bz#22                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#23                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#24                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#25                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#27                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#28                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#29                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#30                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#31                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#32                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#33                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#34                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#35                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#37                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl3-Bz#38                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| cl3-Bz#39                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-82#63                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-8BZ#66                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#40                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#41                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#42                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#43                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| cl4-Bz#44                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |



Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

| Sample ID<br>Sample Date      |     |         |                       |       | AIR-GH<br>12/22/2011 Q |  |
|-------------------------------|-----|---------|-----------------------|-------|------------------------|--|
| Analyte                       | CAS | Units   | Site Action Level     | Media | Air                    |  |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |                        |  |
| Cl4-Bz#45                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#47                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#48                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#49                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| cl4-Bz#50                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#51                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#52                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#53                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| cl4-Bz#54                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#55                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-BZ#56                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#57                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#59                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-BZ#60                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#61                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#65/#75/#62             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U                   |  |
| Cl4-Bz#67/#58                 |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| cl4-Bz#68/#64                 |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl4-Bz#69                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#70                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#71                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#72                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#73/#46                 |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl4-Bz#74                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#76                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#77                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#78                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#79                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#80                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl4-Bz#81                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

| Sample ID<br>Sample Date      |     |         |                       |       | AIR-GH<br>12/22/2011 Q |  |
|-------------------------------|-----|---------|-----------------------|-------|------------------------|--|
| Analyte                       | CAS | Units   | Site Action Level     | Media | Air                    |  |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |                        |  |
| Cl5-Bz#1 10                   |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#100                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#101/#90                |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl5-Bz#102                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#103                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#104                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#105                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#106                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#107/#123               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl5-Bz#108                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#113                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#115                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#117                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#120                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#121/#95/#88            |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U                   |  |
| Cl5-Bz#122                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#124                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#126                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#127                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#82                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#83/#125/#112           |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 30 U                   |  |
| Cl5-Bz#85                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#86/#109                |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl5-Bz#87/#111                |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl5-Bz#89/#84                 |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl5-Bz#91                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#92                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#93                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#96                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#97                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

| Sample ID<br>Sample Date      |     |         |                       |       | AIR-GH<br>12/22/2011 Q |  |
|-------------------------------|-----|---------|-----------------------|-------|------------------------|--|
| Analyte                       | CAS | Units   | Site Action Level     | Media | Air                    |  |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |                        |  |
| Cl5-Bz#98                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl5-Bz#99                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#128                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#129/#158               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl6-Bz#130/#164               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl6-Bz#131                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#132                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#133                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#134                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#135                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#136                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#137                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#138                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#140                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#141                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#142                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#143/#139               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl6-Bz#144                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#145                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#146                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#147/#149               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl6-Bz#148                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#150                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#151                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#152                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#154                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#156                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#157                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#159                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#161                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

| Sample ID<br>Sample Date      |     |         |                       |       | AIR-GH<br>12/22/2011 Q |  |
|-------------------------------|-----|---------|-----------------------|-------|------------------------|--|
| Analyte                       | CAS | Units   | Site Action Level     | Media | Air                    |  |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |                        |  |
| Cl6-Bz#162                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#166                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#167                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl6-Bz#168                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| cl6-Bz#169                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-82#186                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#170                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#171                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#172                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#173                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#174                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#176                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#177                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| cl7-Bz#178                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#179                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#180                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#181                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#182/#175               |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl7-Bz#183                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#184                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#185                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#187                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#188                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#189                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| cl7-Bz#190                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#191                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#192                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl7-Bz#193                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl8-Bz#195                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl8-Bz#196                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |

Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

| Sample ID<br>Sample Date      |     |         |                       |       | AIR-GH<br>12/22/2011 Q |  |
|-------------------------------|-----|---------|-----------------------|-------|------------------------|--|
| Analyte                       | CAS | Units   | Site Action Level     | Media | Air                    |  |
| <b>PCB Congeners/Homologs</b> |     |         |                       |       |                        |  |
| Cl8-Bz#198                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl8-Bz#199                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl8-Bz#201                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl8-Bz#202                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl8-Bz#204/#200-CAL           |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 20 U                   |  |
| Cl8-Bz#205                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl9-Bz#203                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl9-Bz#206                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl9-Bz#207                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Cl9-Bz#208                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| ClB-Bz#194                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Clg-Bz#197                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| ClS-8.2#26                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| ClS-Bz#114                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| ClS-Bz#116                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| clS-Bz#118                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| ClS-Bz#119                    |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| ClS-Bz#94                     |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Decachlorobiphenyl            |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Dlchlorobiphenyls             |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Heptachlorobiphenyls          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Hexachlorobiphenyls           |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Monochlorobiphenyls           |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Nonachlorobiphenyls           |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Octachlorobiphenyls           |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Pentachlorobiphenyls          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Tetrachlorobiphenyls          |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Total Homologs                |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |
| Trichlorobiphenyls            |     | ng/cart | 0.1 µg/m <sup>3</sup> |       | 10 U                   |  |

## Table D-3: Stone 2014 Site Status Report

Summary of Post Remedy Results, Part G

|                        |     |       |                   |       |            |   |  |
|------------------------|-----|-------|-------------------|-------|------------|---|--|
| Sample ID              |     |       |                   |       | AIR-GH     |   |  |
| Sample Date            |     |       |                   |       | 12/22/2011 | Q |  |
| Analyte                | CAS | Units | Site Action Level | Media | Air        |   |  |
| PCB Congeners/Homologs |     |       |                   |       |            |   |  |

Key:

Shaded results indicate an exceedence of the enforcement standard(s)

NE- Not Established

U - Analyte not detected; limit of quantitation listed

UJ - Analyte not detected; limit of quantitation estimated during data validation

TSCA - Toxic Substance Control Act

Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Part H

| Sample ID   | TSCA: Solid Non-Porous Media |       |                |       | Part H Hallway 2 | Part H Hallway 3 | Part H Hallway | Part H Pharmacy-1 | Part H Pharmacy1-FD | PartH-FL-WP1 |
|-------------|------------------------------|-------|----------------|-------|------------------|------------------|----------------|-------------------|---------------------|--------------|
| Sample Date |                              |       |                |       | 4/3/2012         | 4/3/2012         | 4/3/2012       | 4/3/2012          | 4/3/2012            | 4/19/2012    |
| Analyte     | CAS                          | Units | High Occupancy | Media | Q                | Q                | Q              | Q                 | Q                   | Q            |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
| Wipe        |                              |       |                |       |                  |                  |                |                   |                     |              |
|             |                              |       |                |       |                  |                  |                |                   |                     |              |



Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Part H

| Sample ID<br>Sample Date<br>AnalyteCASUnitsSite action levelMedia |  |         |                       |  | AIR-Hallway<br>4/3/2012<br>Air | Q    | AIR-Pharmacy<br>4/3/2012<br>Air | Q    | AIR-Pharmacy-FD<br>4/3/2012<br>Air | Q    |
|-------------------------------------------------------------------|--|---------|-----------------------|--|--------------------------------|------|---------------------------------|------|------------------------------------|------|
| PCB Congeners/Homologs                                            |  |         |                       |  |                                |      |                                 |      |                                    |      |
| Cl3-Bz#27                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#28                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#29                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#30                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#31                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#32                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#33                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#34                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#35                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#37                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl3-Bz#38                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl3-Bz#39                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-82#63                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-8BZ#66                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#40                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#41                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#42                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#43                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl4-Bz#44                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#45                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#47                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#48                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#49                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl4-Bz#50                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#51                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#52                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#53                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl4-Bz#54                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#55                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-BZ#56                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#57                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#59                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-BZ#60                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#61                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#65/#75/#62                                                 |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 30 U |                                 | 30 U |                                    | 30 U |
| Cl4-Bz#67/#58                                                     |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| cl4-Bz#68/#64                                                     |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl4-Bz#69                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#70                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#71                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#72                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#73/#46                                                     |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |

Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Part H

| Sample ID<br>Sample Date<br>AnalyteCASUnitsSite action levelMedia |  |         |                       |  | AIR-Hallway<br>4/3/2012<br>Air | Q    | AIR-Pharmacy<br>4/3/2012<br>Air | Q    | AIR-Pharmacy-FD<br>4/3/2012<br>Air | Q    |
|-------------------------------------------------------------------|--|---------|-----------------------|--|--------------------------------|------|---------------------------------|------|------------------------------------|------|
| PCB Congeners/Homologs                                            |  |         |                       |  |                                |      |                                 |      |                                    |      |
| Cl4-Bz#74                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#76                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#77                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#78                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#79                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#80                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl4-Bz#81                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#1 10                                                       |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#100                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#101/#90                                                    |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl5-Bz#102                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl5-Bz#103                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#104                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl5-Bz#105                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#106                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#107/#123                                                   |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl5-Bz#108                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl5-Bz#113                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#114                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#115                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#117                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#120                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#121/#95/#88                                                |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 30 U |                                 | 30 U |                                    | 30 U |
| Cl5-Bz#122                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#124                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#126                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#127                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl5-Bz#82                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#83/#125/#112                                               |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 30 U |                                 | 30 U |                                    | 30 U |
| Cl5-Bz#85                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#86/#109                                                    |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl5-Bz#87/#111                                                    |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl5-Bz#89/#84                                                     |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl5-Bz#91                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#92                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#93                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-BZ#96                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#97                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-BZ#98                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl5-Bz#99                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#128                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#129/#158                                                   |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |

Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Part H

| Sample ID<br>Sample Date<br>AnalyteCASUnitsSite action levelMedia |  |         |                       |  | AIR-Hallway<br>4/3/2012<br>Air | Q    | AIR-Pharmacy<br>4/3/2012<br>Air | Q    | AIR-Pharmacy-FD<br>4/3/2012<br>Air | Q    |
|-------------------------------------------------------------------|--|---------|-----------------------|--|--------------------------------|------|---------------------------------|------|------------------------------------|------|
| PCB Congeners/Homologs                                            |  |         |                       |  |                                |      |                                 |      |                                    |      |
| Cl6-Bz#130/#164                                                   |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl6-Bz#131                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#132                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl6-BZ#133                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#134                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#135                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#136                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#137                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-BZ#138                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#140                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#141                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#142                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#143/#139                                                   |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl6-Bz#144                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl6-Bz#145                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#146                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#147/#149                                                   |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl6-Bz#148                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#150                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#151                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#152                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#154                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#156                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#157                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#159                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#161                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#162                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#166                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#167                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl6-Bz#168                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl6-Bz#169                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-82#186                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#170                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#171                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#172                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#173                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#174                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#176                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#177                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl7-Bz#178                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#179                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#180                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |

Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Part H

| Sample ID<br>Sample Date<br>AnalyteCASUnitsSite action levelMedia |  |         |                       |  | AIR-Hallway<br>4/3/2012<br>Air | Q    | AIR-Pharmacy<br>4/3/2012<br>Air | Q    | AIR-Pharmacy-FD<br>4/3/2012<br>Air | Q    |
|-------------------------------------------------------------------|--|---------|-----------------------|--|--------------------------------|------|---------------------------------|------|------------------------------------|------|
| PCB Congeners/Homologs                                            |  |         |                       |  |                                |      |                                 |      |                                    |      |
| Cl7-Bz#181                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#182/#175                                                   |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl7-Bz#183                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#184                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#185                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#187                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#188                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#189                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cl7-Bz#190                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#191                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#192                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl7-Bz#193                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl8-Bz#195                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl8-Bz#196                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl8-Bz#198                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl8-Bz#199                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl8-Bz#201                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl8-Bz#202                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl8-Bz#204/#200-CAL                                               |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 20 U |                                 | 20 U |                                    | 20 U |
| Cl8-Bz#205                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl9-Bz#203                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl9-BZ#206                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl9-Bz#207                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Cl9-Bz#208                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| ClB-Bz#194                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Clg-Bz#197                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| ClS-8.2#26                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| ClS-Bz#116                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| cls-Bz#118                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| ClS-Bz#119                                                        |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| ClS-Bz#94                                                         |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Decachlorobiphenyl                                                |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| DiChlorobiphenyls                                                 |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Heptachlorobiphenyls                                              |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Hexachlorobiphenyls                                               |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Monochlorobiphenyls                                               |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Nonachlorobiphenyls                                               |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Octachlorobiphenyls                                               |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Pentachlorobiphenyls                                              |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Tetrachlorobiphenyls                                              |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Total Homologs                                                    |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |
| Trichlorobiphenyls                                                |  | ng/cart | 0.1 µg/m <sup>3</sup> |  |                                | 10 U |                                 | 10 U |                                    | 10 U |

Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Part H

|                        |       |                   |       |  |             |  |              |  |                 |  |
|------------------------|-------|-------------------|-------|--|-------------|--|--------------|--|-----------------|--|
| Sample ID              |       |                   |       |  | AIR-Hallway |  | AIR-Pharmacy |  | AIR-Pharmacy-FD |  |
| Sample Date            |       |                   |       |  | 4/3/2012    |  | 4/3/2012     |  | 4/3/2012        |  |
| Analyte                |       |                   |       |  | Air         |  | Air          |  | Air             |  |
| CAS                    | Units | Site action level | Media |  |             |  |              |  |                 |  |
| PCB Congeners/Homologs |       |                   |       |  |             |  |              |  |                 |  |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

ng/cart - nanograms per cartridge

**Bold** results indicate detections of the analyte

NE- Not Established

U - Analyte not detected; limit of quantitation listed

US EPA Region III RSL - United States Environmental Protection Agency Region III Regional Screening Levels for Residential and Industrial Soils

TSCA - Toxic Substance Control Act

Table D-3: Stone 2014 Site Status Report

Summary of Post-Remedy Results Part LMN

| Sample ID    | TSCA: Solid Non- |         | HP-CONF-1            | Part LMN-FL-WP1 | Part LMN-FL-WP1-FD |
|--------------|------------------|---------|----------------------|-----------------|--------------------|
| Sample Date  | Porous Media     |         | 9/25/2011 Q          | 4/23/2012 Q     | 4/23/2012 Q        |
| Analyte      | CAS              | Units   | High Occupancy Media | Wipe            | Wipe               |
| Aroclor 1016 | 12674-11-2       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1221 | 11104-28-2       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1232 | 11141-16-5       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1242 | 53469-21-9       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1248 | 12672-29-6       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1254 | 11097-69-1       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1260 | 11096-82-5       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1262 | 37324-23-5       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Aroclor 1268 | 11100-14-4       | µg/Wipe | 10                   | 0.5 U           | 0.5 U              |
| Total        |                  | µg/Wipe |                      |                 |                    |

| Sample ID                     | AIR-PartLMN |                             |
|-------------------------------|-------------|-----------------------------|
| Sample Date                   | 4/24/2012   | Q                           |
| Analyte                       | Units       | Site Action Limit Media Air |
| <b>PCB Congeners/Homologs</b> |             |                             |
| c16-Bz#153                    | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| c16-BZ#155                    | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| c16-Bz#163/#160               | ng/cart     | 0.1 µg/m <sup>3</sup> 20 U  |
| c16-Bz#165                    | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl10-Bz#209                   | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl1-Bz#1                      | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl1-Bz#2                      | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| cl1-BZ#3                      | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl2-Bz#11                     | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl2-Bz#12                     | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl2-Bz#13                     | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl2-Bz#14                     | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| cl2-Bz#15                     | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |
| Cl2-Bz#4/#10                  | ng/cart     | 0.1 µg/m <sup>3</sup> 20 U  |
| Cl2-Bz#5                      | ng/cart     | 0.1 µg/m <sup>3</sup> 10 U  |

# Table D-3: Stone 2014 Site Status Report

## Summary of Post-Remedy Results Part LMN

| Sample ID                     | AIR-PartLMN |                       |       |      |
|-------------------------------|-------------|-----------------------|-------|------|
| Sample Date                   | 4/24/2012 Q |                       |       |      |
| Analyte                       | Units       | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |             |                       |       |      |
| Cl2-Bz#6                      | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl2-Bz#7                      | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl2-Bz#8                      | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl2-Bz#9                      | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#36                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#16                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#17                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#18                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#19                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#21/#20                 | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl3-Bz#22                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#23                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#24                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#25                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#27                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#28                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#29                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#30                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#31                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#32                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#33                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#34                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#35                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#37                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl3-Bz#38                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl3-Bz#39                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |



# Table D-3: Stone 2014 Site Status Report

## Summary of Post-Remedy Results Part LMN

| Sample ID                     | AIR-PartLMN |                       |       |      |
|-------------------------------|-------------|-----------------------|-------|------|
| Sample Date                   | 4/24/2012 Q |                       |       |      |
| Analyte                       | Units       | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |             |                       |       |      |
| Cl4-82#63                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-8BZ#66                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#40                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#41                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#42                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#43                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl4-Bz#44                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#45                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#47                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#48                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#49                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl4-Bz#50                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#51                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#52                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#53                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl4-Bz#54                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#55                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-BZ#56                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#57                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#59                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-BZ#60                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#61                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#65/#75/#62             | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 30 U |
| Cl4-Bz#67/#58                 | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| cl4-Bz#68/#64                 | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl4-Bz#69                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |

# Table D-3: Stone 2014 Site Status Report

## Summary of Post-Remedy Results Part LMN

| Sample ID                     | AIR-PartLMN |                       |       |      |
|-------------------------------|-------------|-----------------------|-------|------|
| Sample Date                   | 4/24/2012 Q |                       |       |      |
| Analyte                       | Units       | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |             |                       |       |      |
| Cl4-Bz#70                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#71                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#72                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#73/#46                 | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl4-Bz#74                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#76                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#77                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#78                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#79                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#80                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl4-Bz#81                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#1 10                   | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#100                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#101/#90                | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#102                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#103                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#104                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#105                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#106                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#107/#123               | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#108                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#113                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#114                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#115                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#117                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#120                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |

Table D-3: Stone 2014 Site Status Report

Summary of Post-Remedy Results Part LMN

| Sample ID                     | AIR-PartLMN |                       |       |      |
|-------------------------------|-------------|-----------------------|-------|------|
| Sample Date                   | 4/24/2012 Q |                       |       |      |
| Analyte                       | Units       | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |             |                       |       |      |
| Cl5-Bz#121/#95/#88            | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 30 U |
| Cl5-Bz#122                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#124                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#126                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#127                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl5-Bz#82                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#83/#125/#112           | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 30 U |
| Cl5-Bz#85                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#86/#109                | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#87/#111                | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#89/#84                 | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl5-Bz#91                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#92                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#93                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-BZ#96                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#97                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-BZ#98                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl5-Bz#99                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#128                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#129/#158               | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#130/#164               | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#131                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#132                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl6-BZ#133                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#134                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#135                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |

# Table D-3: Stone 2014 Site Status Report

## Summary of Post-Remedy Results Part LMN

| Sample ID                     | AIR-PartLMN |                       |       |      |
|-------------------------------|-------------|-----------------------|-------|------|
| Sample Date                   | 4/24/2012 Q |                       |       |      |
| Analyte                       | Units       | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |             |                       |       |      |
| Cl6-Bz#136                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#137                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-BZ#138                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#140                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#141                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#142                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#143/#139               | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#144                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl6-Bz#145                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#146                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#147/#149               | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl6-Bz#148                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#150                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#151                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#152                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#154                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#156                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#157                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#159                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#161                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#162                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#166                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#167                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl6-Bz#168                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl6-Bz#169                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-82#186                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |

# Table D-3: Stone 2014 Site Status Report

## Summary of Post-Remedy Results Part LMN

| Sample ID                     | AIR-PartLMN |                       |       |      |
|-------------------------------|-------------|-----------------------|-------|------|
| Sample Date                   | 4/24/2012 Q |                       |       |      |
| Analyte                       | Units       | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |             |                       |       |      |
| Cl7-Bz#170                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#171                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#172                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#173                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#174                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#176                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#177                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl7-Bz#178                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#179                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#180                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#181                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#182/#175               | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl7-Bz#183                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#184                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#185                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#187                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#188                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#189                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl7-Bz#190                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#191                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#192                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl7-Bz#193                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#195                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#196                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#198                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#199                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |

# Table D-3: Stone 2014 Site Status Report

## Summary of Post-Remedy Results Part LMN

| Sample ID                     | AIR-PartLMN |                       |       |      |
|-------------------------------|-------------|-----------------------|-------|------|
| Sample Date                   | 4/24/2012 Q |                       |       |      |
| Analyte                       | Units       | Site Action Limit     | Media | Air  |
| <b>PCB Congeners/Homologs</b> |             |                       |       |      |
| Cl8-Bz#201                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#202                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#204/#200-CAL           | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 20 U |
| Cl8-Bz#205                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-Bz#203                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-BZ#206                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-Bz#207                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl9-Bz#208                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| ClB-Bz#194                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Clg-Bz#197                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-8.2#26                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#116                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| cl8-Bz#118                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#119                    | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Cl8-Bz#94                     | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Decachlorobiphenyl            | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Dlchlorobiphenyls             | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Heptachlorobiphenyls          | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Hexachlorobiphenyls           | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Monochlorobiphenyls           | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Nonachlorobiphenyls           | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Octachlorobiphenyls           | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Pentachlorobiphenyls          | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Tetrachlorobiphenyls          | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Total Homologs                | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |
| Trichlorobiphenyls            | ng/cart     | 0.1 µg/m <sup>3</sup> |       | 10 U |

Table D-3: Stone 2014 Site Status Report  
Summary of Post-Remedy Results Part LMN

| Sample ID              |       |                   |       | AIR-PartLMN |
|------------------------|-------|-------------------|-------|-------------|
| Sample Date            |       |                   |       | 4/24/2012 Q |
| Analyte                | Units | Site Action Limit | Media | Air         |
| PCB Congeners/Homologs |       |                   |       |             |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

ng/cart - nanograms per cartridge

NE- Not Established

U - Analyte not detected; limit of quantitation listed



Table D-3: Stone 2014 Site Status Report  
Summary of Post Remedy Results, Parts O/P

| Sample ID    |            |       |                         | AMR-OP-01       |         | AMR-OP-02       |         | AMR-OP-03       |         | AMR-OP-04          |         | AMR-OP-05 |         | AMR-OP-06 |         | AMR-OP-06-FD |         |  |
|--------------|------------|-------|-------------------------|-----------------|---------|-----------------|---------|-----------------|---------|--------------------|---------|-----------|---------|-----------|---------|--------------|---------|--|
|              |            |       | Site<br>action<br>level |                 |         |                 |         |                 |         |                    |         |           |         |           |         |              |         |  |
| Sample Date  |            |       |                         | 1/14/2011       | Q       | 1/14/2011       | Q       | 1/14/2011       | Q       | 1/14/2011          | Q       | 1/14/2011 | Q       | 1/14/2011 | Q       | 1/14/2011    | Q       |  |
| Analyte      | CAS        | Units |                         | Media           | Soil    |                 | Soil    |                 | Soil    |                    | Soil    |           | Soil    |           | Soil    |              | Soil    |  |
| PCBs         |            |       |                         |                 |         |                 |         |                 |         |                    |         |           |         |           |         |              |         |  |
| Aroclor 1016 | 12674-11-2 | mg/Kg |                         |                 | 0.056 U |                 | 0.054 U |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1221 | 11104-28-2 | mg/Kg |                         |                 | 0.056 U |                 | 0.054 U |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1232 | 11141-16-5 | mg/Kg |                         |                 | 0.056 U |                 | 0.054 U |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1242 | 53469-21-9 | mg/Kg |                         |                 | 0.056 U |                 | 0.054 U |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1248 | 12672-29-6 | mg/Kg |                         |                 | 0.056 U |                 | 0.054 U |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1254 | 11097-69-1 | mg/Kg |                         |                 | 0.056 U |                 | 0.34    |                 | 0.059   |                    | 0.053 U |           | 0.27    |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1260 | 11096-82-5 | mg/Kg |                         |                 | 0.056 U |                 | 0.52    |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1262 | 37324-23-5 | mg/Kg |                         |                 | 0.056 U |                 | 0.054 U |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Aroclor 1268 | 11100-14-4 | mg/Kg |                         |                 | 0.056 U |                 | 0.054 U |                 | 0.054 U |                    | 0.053 U |           | 0.051 U |           | 0.049 U |              | 0.051 U |  |
| Total PCBs   |            | mg/Kg | 3                       |                 |         |                 | 0.86    |                 | 0.059   |                    |         |           | 0.27    |           |         |              |         |  |
| Sample ID    |            |       |                         | AMR-SL-SB08-0_0 |         | AMR-SL-SB09-0_0 |         | AMR-SL-SB10-0_0 |         | AMR-SL-SB10-0_0-FD |         |           |         |           |         |              |         |  |
|              |            |       | Site<br>action<br>level |                 |         |                 |         |                 |         |                    |         |           |         |           |         |              |         |  |
| Sample Date  |            |       |                         | 3/9/2011        | Q       | 3/9/2011        | Q       | 3/9/2011        | Q       | 3/9/2011           | Q       |           |         |           |         |              |         |  |
| Analyte      | CAS        | Units |                         | Media           | Soil    |                 | Soil    |                 | Soil    |                    | Soil    |           |         |           |         |              |         |  |
| PCBs         |            |       |                         |                 |         |                 |         |                 |         |                    |         |           |         |           |         |              |         |  |
| Aroclor 1016 | 12674-11-2 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1221 | 11104-28-2 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1232 | 11141-16-5 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1242 | 53469-21-9 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1248 | 12672-29-6 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1254 | 11097-69-1 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1260 | 11096-82-5 | mg/Kg |                         |                 | 0.058   |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1262 | 37324-23-5 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Aroclor 1268 | 11100-14-4 | mg/Kg |                         |                 | 0.057 U |                 | 0.058 U |                 | 0.055 U |                    | 0.055 U |           |         |           |         |              |         |  |
| Total PCBs   |            | mg/Kg | 3                       |                 |         |                 | 0.058   |                 |         |                    |         |           |         |           |         |              |         |  |

Key:

- mg/Kg - milligrams per kilogram
- Bold** results indicate detections of the analyte
- Shaded results indicate an exceedence of the enforcement standard(s)
- B - Analyte was detected in an associated blank
- NE- Not Established
- U - Analyte not detected; limit of quantitation listed

**Table D-3: Stone 2014 Site Status Report**  
Summary of Post Remedy Results, Offices

| Sample ID<br>Sample Date<br>Analyte                | Units | Draft IROCP<br>Indoor Air | Media | EX01 SSD Vent<br>2/12/2014<br>Air | Q          | EX02 Background<br>2/12/2014<br>Air | Q          | IA-01 Exercise Room<br>2/12/2014<br>Air | Q          | IA-02 Exam Room<br>2/12/2014<br>Air | Q          |
|----------------------------------------------------|-------|---------------------------|-------|-----------------------------------|------------|-------------------------------------|------------|-----------------------------------------|------------|-------------------------------------|------------|
| <b>VOCs</b>                                        |       |                           |       |                                   |            |                                     |            |                                         |            |                                     |            |
| 1,1,1-Trichloroethane                              | µg/m3 | 1000 µg/m3                |       | <b>0.8</b>                        |            | <0.19                               |            | <0.19                                   |            | <0.19                               |            |
| 1,1,2,2-Tetrachloroethane                          | µg/m3 | 0.018 µg/m3               |       | <0.24                             | V-05       | <0.24                               | V-05       | <0.24                                   | V-05       | <0.24                               | V-05       |
| 1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)  | µg/m3 | 30000 µg/m3               |       | <b>0.5</b>                        |            | <b>0.54</b>                         |            | <b>0.56</b>                             |            | <b>0.59</b>                         |            |
| 1,1,2-Trichloroethane                              | µg/m3 | 0.063 µg/m3               |       | <0.19                             |            | <0.19                               |            | <0.19                                   |            | <0.19                               |            |
| 1,1-Dichloroethane                                 | µg/m3 | 50 µg/m3                  |       | <b>0.53</b>                       |            | <0.14                               |            | <0.14                                   |            | <0.14                               |            |
| 1,1-Dichloroethylene                               | µg/m3 | NE                        |       | <0.14                             |            | <0.14                               |            | <0.14                                   |            | <0.14                               |            |
| 1,2,4-Trichlorobenzene                             | µg/m3 | NE                        |       | <0.26                             |            | <0.26                               |            | <0.26                                   |            | <0.26                               |            |
| 1,2-Dichloro-1,1,2,2-tetrafluoroethane (Freon 114) | µg/m3 | NE                        |       | <0.25                             |            | <0.25                               |            | <0.25                                   |            | <0.25                               |            |
| 1,2-Dichlorobenzene                                | µg/m3 | 200 µg/m3                 |       | <0.21                             |            | <0.21                               |            | <0.21                                   |            | <0.21                               |            |
| 1,2-Dichloroethane                                 | µg/m3 | 0.038 µg/m3               |       | <0.14                             |            | <0.14                               |            | <b>0.17</b>                             |            | <0.14                               |            |
| 1,2-Dichloropropane                                | µg/m3 | NE                        |       | <0.16                             | L-03, V-05 | <0.16                               | L-03, V-05 | <0.16                                   | L-03, V-05 | <0.16                               | L-03, V-05 |
| 1,3-Dichlorobenzene                                | µg/m3 | NE                        |       | <0.21                             |            | <0.21                               |            | <0.21                                   |            | <0.21                               |            |
| 1,4-Dichlorobenzene                                | µg/m3 | NE                        |       | <0.21                             |            | <0.21                               |            | <0.21                                   |            | <0.21                               |            |
| Benzyl chloride                                    | µg/m3 | NE                        |       | <0.18                             |            | <0.18                               |            | <0.18                                   |            | <0.18                               |            |
| Bromodichloromethane                               | µg/m3 | 0.056 µg/m3               |       | <0.24                             |            | <0.24                               |            | <0.24                                   |            | <0.24                               |            |
| Carbon Tetrachloride                               | µg/m3 | 0.41 µg/m3                |       | <b>0.34</b>                       |            | <b>0.34</b>                         |            | <b>0.54</b>                             |            | <b>0.55</b>                         |            |
| Chlorobenzene                                      | µg/m3 | 2 µg/m3                   |       | <0.16                             |            | <0.16                               |            | <0.16                                   |            | <0.16                               |            |
| Chloroethane                                       | µg/m3 | NE                        |       | <0.093                            |            | <0.093                              |            | <0.093                                  |            | <0.093                              |            |
| Chloroform                                         | µg/m3 | 0.38 µg/m3                |       | <b>0.65</b>                       |            | <0.17                               |            | <0.17                                   |            | <0.17                               |            |
| Chloromethane                                      | µg/m3 | 90 µg/m3                  |       | <b>0.96</b>                       |            | <b>0.95</b>                         |            | <b>0.87</b>                             |            | <b>0.96</b>                         |            |
| cis-1,2-Dichloroethylene                           | µg/m3 | NE                        |       | <b>4.7</b>                        |            | <0.14                               |            | <0.14                                   |            | <0.14                               |            |
| cis-1,3-Dichloropropene                            | µg/m3 | NE                        |       | <0.16                             |            | <0.16                               |            | <0.16                                   |            | <0.16                               |            |
| Dibromochloromethane                               | µg/m3 | 0.042 µg/m3               |       | <0.30                             |            | <0.30                               |            | <0.30                                   |            | <0.30                               |            |
| Dichlorodifluoromethane (Freon 12)                 | µg/m3 | 200 µg/m3                 |       | <b>2.8</b>                        |            | <b>2.8</b>                          |            | <b>2.5</b>                              |            | <b>2.7</b>                          |            |
| Hexachlorobutadiene                                | µg/m3 | 0.045 µg/m3               |       | <0.37                             |            | <0.37                               |            | <0.37                                   |            | <0.37                               |            |
| Methylene Chloride                                 | µg/m3 | 2.1 µg/m3                 |       | <1.2                              |            | <1.2                                |            | <b>1.7</b>                              |            | <1.2                                |            |
| Tetrachloroethylene                                | µg/m3 | 0.57 µg/m3                |       | <0.24                             |            | <0.24                               |            | <b>0.41</b>                             |            | <0.24                               |            |
| trans-1,2-Dichloroethylene                         | µg/m3 | NE                        |       | <b>2.7</b>                        |            | <0.14                               |            | <b>5.3</b>                              |            | <b>7.5</b>                          |            |
| trans-1,3-Dichloropropene                          | µg/m3 | NE                        |       | <0.16                             |            | <0.16                               |            | <0.16                                   |            | <0.16                               |            |
| Trichloroethylene                                  | µg/m3 | 0.5 µg/m3                 |       | <b>1.7</b>                        |            | <0.19                               |            | <0.19                                   |            | <0.19                               |            |
| Trichlorofluoromethane (Freon 11)                  | µg/m3 | 562 µg/m3                 |       | <b>2.8</b>                        |            | <b>1.4</b>                          |            | <b>1.5</b>                              |            | <b>1.4</b>                          |            |
| Vinyl Chloride                                     | µg/m3 | 0.11 µg/m3                |       | <0.090                            |            | <0.090                              |            | <0.090                                  |            | <0.090                              |            |

Key:

µg/m3 - micrograms per cubic meter

**Bold** results indicate detection of the analyte

Shaded results indicate an exceedance of the enforcement standards

L-03 - Lab fortified blank/control sample recovery is outside of control limits. Reported value for this compound is likely to be biased on the low side.

V-05 - Continuing calibration did not meet method specifications and was biased on the low side for this compound. Increased uncertainty is associated with the reported value.

Draft IROCP Indoor Air - Indoor Air Standard from Draft State of Vermont Agency of Natural Resources Investigation and Remediation of Contaminated Properties Procedure, April 2012

**Table D-4: 2014 Remedial Action Report**

Summary of Post Remedy Results, Parking Garage Upper and Lower Levels

| Sample ID    | TSCA: Solid Non-Porous Media |         |                      | Lower Level  | Upper Level  | Upper Level - FD | Trip Blank   |
|--------------|------------------------------|---------|----------------------|--------------|--------------|------------------|--------------|
| Sample Date  |                              |         |                      | 11/20/2014 Q | 11/20/2014 Q | 11/20/2014 Q     | 11/20/2014 Q |
| Analyte      | CAS                          | Units   | High Occupancy Media | Wipe         | Wipe         | Wipe             | Wipe         |
| <b>PCBs</b>  |                              |         |                      |              |              |                  |              |
| Aroclor 1016 | 12674-11-2                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1221 | 11104-28-2                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1232 | 11141-16-5                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1242 | 53469-21-9                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1248 | 12672-29-6                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1254 | 11097-69-1                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1260 | 11096-82-5                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1262 | 37324-23-5                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |
| Aroclor 1268 | 11100-14-4                   | µg/Wipe | 10                   | 0.5 U        | 0.5 U        | 0.5 U            | 0.5 U        |

Key:

µg/Wipe - micrograms per 100 square centimeter wipe

Shaded results indicate an exceedence of the enforcement standard(s)

NE- Not Established

U - Analyte not detected; limit of quantitation listed

TSCA - Toxic Substance Control Act

**Table D-5: 2017 Ongoing Monitoring Report**  
Indoor Air POLYCHLORINATED BIPHENYLS Sample Analytical Results

| Sample ID                       |            | Non-occupied Indoor | Occupied Indoor  | Ambient        |   | Part B         |   | Part C        |   | Part G        |   | Part G Dup    |   |
|---------------------------------|------------|---------------------|------------------|----------------|---|----------------|---|---------------|---|---------------|---|---------------|---|
| Sample Date                     | CAS#       | Air Action Level    | Air Action Level | 7/28/2017      | Q | 7/28/2017      | Q | 7/28/2017     | Q | 7/28/2017     | Q | 7/28/2017     | Q |
|                                 |            | (µg/m3)             | (µg/m3)          |                |   |                |   |               |   |               |   |               |   |
| Decachlorobiphenyl              | 2051-24-3  | NE                  | NE               | 0.0019         | U | 0.0016         | U | 0.0017        | U | 0.0016        | U | 0.0017        | U |
| Dichlorobiphenyls               | 25512-42-9 | NE                  | NE               | 0.00038        | U | 0.00033        | U | <b>0.0019</b> |   | 0.00032       | U | 0.00034       | U |
| Heptachlorobiphenyls            | 28655-71-2 | NE                  | NE               | 0.0011         | U | 0.00099        | U | 0.001         | U | 0.00097       | U | 0.001         | U |
| Hexachlorobiphenyls             | 26601-64-9 | NE                  | NE               | 0.00075        | U | 0.00066        | U | <b>0.0093</b> |   | 0.00065       | U | 0.00069       | U |
| Monochlorobiphenyls             | 27323-18-8 | NE                  | NE               | 0.00038        | U | 0.00033        | U | 0.00033       | U | 0.00032       | U | 0.00034       | U |
| Nonachlorobiphenyls             | 53742-07-7 | NE                  | NE               | 0.0019         | U | 0.0016         | U | 0.0017        | U | 0.0016        | U | 0.0017        | U |
| Octachlorobiphenyls             | 55722-26-4 | NE                  | NE               | 0.0011         | U | 0.00099        | U | 0.001         | U | 0.00097       | U | 0.001         | U |
| Pentachlorobiphenyls            | 25429-29-2 | NE                  | NE               | 0.00075        | U | <b>0.0044</b>  |   | <b>0.042</b>  |   | <b>0.0035</b> |   | <b>0.0035</b> |   |
| Tetrachlorobiphenyls            | 26914-33-0 | NE                  | NE               | 0.00075        | U | <b>0.0026</b>  |   | <b>0.022</b>  |   | <b>0.003</b>  |   | <b>0.003</b>  |   |
| Trichlorobiphenyls              | 25323-68-6 | NE                  | NE               | 0.00038        | U | 0.00033        | U | <b>0.0078</b> |   | <b>0.0025</b> |   | <b>0.0027</b> |   |
| Total Polychlorinated biphenyls | 1336-36-3  | 0.3                 | 0.1              |                |   | <b>0.007</b>   |   | <b>0.082</b>  |   | <b>0.0091</b> |   | <b>0.0092</b> |   |
| Sample ID                       |            | Non-occupied Indoor | Occupied Indoor  | Part LMN       |   | Pharmacy       |   | Room 1        |   | Part J        |   |               |   |
| Sample Date                     | CAS#       | Air Action Level    | Air Action Level | 7/28/2017      | Q | 7/28/2017      | Q | 7/28/2017     | Q | 7/28/2017     | Q |               |   |
|                                 |            | (µg/m3)             | (µg/m3)          |                |   |                |   |               |   |               |   |               |   |
| Decachlorobiphenyl              | 2051-24-3  | NE                  | NE               | 0.0016         | U | 0.0016         | U | 0.0017        | U | 0.0016        | U |               |   |
| Dichlorobiphenyls               | 25512-42-9 | NE                  | NE               | 0.00032        | U | 0.00033        | U | <b>0.0053</b> |   | 0.00032       | U |               |   |
| Heptachlorobiphenyls            | 28655-71-2 | NE                  | NE               | 0.00096        | U | 0.00099        | U | <b>0.0024</b> |   | 0.00095       | U |               |   |
| Hexachlorobiphenyls             | 26601-64-9 | NE                  | NE               | <b>0.00083</b> |   | 0.00066        | U | <b>0.012</b>  |   | <b>0.0058</b> |   |               |   |
| Monochlorobiphenyls             | 27323-18-8 | NE                  | NE               | 0.00032        | U | 0.00033        | U | <b>0.0027</b> |   | 0.00032       | U |               |   |
| Nonachlorobiphenyls             | 53742-07-7 | NE                  | NE               | 0.0016         | U | 0.0016         | U | 0.0017        | U | 0.0016        | U |               |   |
| Octachlorobiphenyls             | 55722-26-4 | NE                  | NE               | 0.00096        | U | 0.00099        | U | 0.001         | U | 0.00095       | U |               |   |
| Pentachlorobiphenyls            | 25429-29-2 | NE                  | NE               | <b>0.0064</b>  |   | 0.00066        | U | <b>0.037</b>  |   | <b>0.025</b>  |   |               |   |
| Tetrachlorobiphenyls            | 26914-33-0 | NE                  | NE               | <b>0.0042</b>  |   | <b>0.00073</b> |   | <b>0.033</b>  |   | <b>0.016</b>  |   |               |   |
| Trichlorobiphenyls              | 25323-68-6 | NE                  | NE               | <b>0.0054</b>  |   | 0.00033        | U | <b>0.027</b>  |   | <b>0.013</b>  |   |               |   |
| Total Polychlorinated biphenyls | 1336-36-3  | 0.3                 | 0.1              | <b>0.017</b>   |   | <b>0.00073</b> |   | <b>0.12</b>   |   | <b>0.059</b>  |   |               |   |

Key:

VDH SSL - VT Department of Health Residential Soil Screening Levels

RSL - US Environmental Protection Agency, Regional Screening Levels for Residential (Res) and Industrial (Ind) settings.

mg/kg - milligrams per kilogram (parts per million)

µg/kg - micrograms per kilogram (parts per billion)

µg/L - micrograms per liter (parts per billion)

**Bold** results indicate detections of the analyte

Shaded results indicate an exceedence of the enforcement standard(s)

NE - screening level not established

Created by: BMD 09/28/2017 QC by: DTV 10/02/17

Table D-6: Stone 2025 Supplemental Site Investigation Report

Concentrations of Polychlorinated Biphenyls in Bulk Building Materials

| Sample ID    |            | TSCA: Bulk Product | 100R-PT-01                  |   | 100R-PT-02  |   | 100R-PT-03       |   | 100R-PT-03-FD    |   | 100R-PT-04       |   | 100R-PT-05        |   | RPD |
|--------------|------------|--------------------|-----------------------------|---|-------------|---|------------------|---|------------------|---|------------------|---|-------------------|---|-----|
|              |            |                    | Beige Paint                 |   | Beige Paint |   | Grey-Beige Paint |   | Grey-Beige Paint |   | Beige Paint      |   | Beige Paint       |   |     |
| Sample Date  | CAS#       |                    | 6/23/2021                   | Q | 6/23/2021   | Q | 6/23/2021        | Q | 6/23/2021        | Q | 6/23/2021        | Q | 6/23/2021         | Q |     |
|              |            | (mg/Kg)            |                             |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1016 | 12674-11-2 | 50                 | 2.4 U                       |   | 4.8 U       |   | 2.4 U            |   | 5.0 U            |   | 2.4 U            |   | 4.8 U             |   | -   |
| Aroclor-1221 | 11104-28-2 | 50                 | 2.4 U                       |   | 4.8 U       |   | 2.4 U            |   | 5.0 U            |   | 2.4 U            |   | 4.8 U             |   | -   |
| Aroclor-1232 | 11141-16-5 | 50                 | 2.4 U                       |   | 4.8 U       |   | 2.4 U            |   | 5.0 U            |   | 2.4 U            |   | 4.8 U             |   | -   |
| Aroclor-1242 | 53469-21-9 | 50                 | 2.4 U                       |   | 4.8 U       |   | 2.4 U            |   | 5.0 U            |   | 2.4 U            |   | 4.8 U             |   | -   |
| Aroclor-1248 | 12672-29-6 | 50                 | 2.4 U                       |   | 4.8 U       |   | 19               |   | 5.0 U            |   | 2.4 U            |   | 4.8 U             |   | -   |
| Aroclor-1254 | 11097-69-1 | 50                 | 12                          |   | 54          |   | 51               |   | 46               |   | 17               |   | 46                |   | 10% |
| Aroclor-1260 | 11096-82-5 | 50                 | 6.5                         |   | 23          |   | 88               |   | 64               |   | 6.9              |   | 26                |   | 32% |
| Aroclor-1262 | 37324-23-5 | 50                 | 2.4 U                       |   | 4.8 U       |   | 2.4 U            |   | 5.0 U            |   | 2.4 U            |   | 4.8 U             |   | -   |
| Aroclor-1268 | 11100-14-4 | 50                 | 2.4 U                       |   | 4.8 U       |   | 40 U             |   | 5.0 U            |   | 2.4 U            |   | 4.8 U             |   | -   |
| Total PCBs   | 1336-36-3  | 50                 | 18.5                        |   | 77          |   | 198              |   | 110              |   | 23.9             |   | 72                |   | 57% |
| Sample ID    |            | TSCA: Bulk Product | 100R-PT-06                  |   | 100R-PT-07  |   | 100R-PT-08       |   | 100R-PT-09       |   | 100R-PT-10       |   | 100R-PT-11        |   |     |
|              |            |                    | White Epoxy and Beige Paint |   | White Paint |   | Dark Green Paint |   | Dark Green Paint |   | Dark Green Paint |   | Light Green Paint |   |     |
| Sample Date  | CAS#       |                    | 6/23/2021                   | Q | 6/23/2021   | Q | 6/23/2021        | Q | 6/23/2021        | Q | 6/23/2021        | Q | 6/23/2021         | Q |     |
|              |            | (mg/Kg)            |                             |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1016 | 12674-11-2 | 50                 | 4.8 U                       |   | 5.0 U       |   | 10 U             |   | 5.0 U            |   | 4.8 U            |   | 4.8 U             |   |     |
| Aroclor-1221 | 11104-28-2 | 50                 | 4.8 U                       |   | 5.0 U       |   | 10 U             |   | 5.0 U            |   | 4.8 U            |   | 4.8 U             |   |     |
| Aroclor-1232 | 11141-16-5 | 50                 | 4.8 U                       |   | 5.0 U       |   | 10 U             |   | 5.0 U            |   | 4.8 U            |   | 4.8 U             |   |     |
| Aroclor-1242 | 53469-21-9 | 50                 | 4.8 U                       |   | 5.0 U       |   | 10 U             |   | 5.0 U            |   | 4.8 U            |   | 4.8 U             |   |     |
| Aroclor-1248 | 12672-29-6 | 50                 | 15                          |   | 5.0 U       |   | 18               |   | 13               |   | 4.8 U            |   | 7.8               |   |     |
| Aroclor-1254 | 11097-69-1 | 50                 | 45                          |   | 36          |   | 71               |   | 26               |   | 37               |   | 31                |   |     |
| Aroclor-1260 | 11096-82-5 | 50                 | 4.8 U                       |   | 29          |   | 47               |   | 15               |   | 31               |   | 40                |   |     |
| Aroclor-1262 | 37324-23-5 | 50                 | 4.8 U                       |   | 5.0 U       |   | 10 U             |   | 5.0 U            |   | 4.8 U            |   | 4.8 U             |   |     |
| Aroclor-1268 | 11100-14-4 | 50                 | 4.8 U                       |   | 5.0 U       |   | 10 U             |   | 5.0 U            |   | 4.8 U            |   | 4.8 U             |   |     |
| Total PCBs   | 1336-36-3  | 50                 | 60                          |   | 65          |   | 136              |   | 54               |   | 68               |   | 79                |   |     |
| Sample ID    |            | TSCA: Bulk Product | 100R-PT-12                  |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
|              |            |                    | White Paint                 |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Sample Date  | CAS#       |                    | 6/23/2021                   | Q |             |   |                  |   |                  |   |                  |   |                   |   |     |
|              |            | (mg/Kg)            |                             |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1016 | 12674-11-2 | 50                 | 4.8 U                       |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1221 | 11104-28-2 | 50                 | 4.8 U                       |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1232 | 11141-16-5 | 50                 | 4.8 U                       |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1242 | 53469-21-9 | 50                 | 4.8 U                       |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1248 | 12672-29-6 | 50                 | 4.8 U                       |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1254 | 11097-69-1 | 50                 | 47                          |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1260 | 11096-82-5 | 50                 | 30                          |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1262 | 37324-23-5 | 50                 | 4.8 U                       |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Aroclor-1268 | 11100-14-4 | 50                 | 4.8 U                       |   |             |   |                  |   |                  |   |                  |   |                   |   |     |
| Total PCBs   | 1336-36-3  | 50                 | 77                          |   |             |   |                  |   |                  |   |                  |   |                   |   |     |

Key:

TSCA - Toxic Substance Control Act

mg/kg - milligrams per kilogram (parts per million)

**Bold** results indicate detections of the analyte

Shaded results indicate an exceedance of the enforcement standard

U - Analyte not detected; limit of quantitation listed

Table D-6: Stone 2025 Supplemental Site Investigation Report

Concentrations of Polychlorinated Biphenyls in Solid (Non-Porous) Media

| Sample ID    |            | TSCA: Solid Non-Porous<br>Media High Occupancy<br>Walkaway | TSCA: Solid Non-Porous<br>Media Low Occupancy<br>Walkaway | 100R-WP-01 |   | 100R-WP-02  |   | 100R-WP-03  |   | 100R-WP-03-FD |   | 100R-WP-04 |   | 100R-WP-05  |   | RPD |
|--------------|------------|------------------------------------------------------------|-----------------------------------------------------------|------------|---|-------------|---|-------------|---|---------------|---|------------|---|-------------|---|-----|
| Sample Date  |            |                                                            |                                                           | 6/23/2021  | Q | 6/23/2021   | Q | 6/23/2021   | Q | 6/23/2021     | Q | 6/24/2021  | Q | 6/23/2021   | Q |     |
|              |            | (µg/Wipe)                                                  | (µg/Wipe)                                                 |            |   |             |   |             |   |               |   |            |   |             |   |     |
| Aroclor-1016 | 12674-11-2 | 10                                                         | 100                                                       | 0.20 U     |   | 0.20 U      |   | 0.20 U      |   | 0.20 U        |   | 10 U       |   | 4.0 U       |   | -   |
| Aroclor-1221 | 11104-28-2 | 10                                                         | 100                                                       | 0.20 U     |   | 0.20 U      |   | 0.20 U      |   | 0.20 U        |   | 10 U       |   | 4.0 U       |   | -   |
| Aroclor-1232 | 11141-16-5 | 10                                                         | 100                                                       | 0.20 U     |   | 0.20 U      |   | 0.20 U      |   | 0.20 U        |   | 10 U       |   | 4.0 U       |   | -   |
| Aroclor-1242 | 53469-21-9 | 10                                                         | 100                                                       | 0.20 U     |   | 0.20 U      |   | 0.20 U      |   | 0.20 U        |   | 10 U       |   | 4.0 U       |   | -   |
| Aroclor-1248 | 12672-29-6 | 10                                                         | 100                                                       | 0.20 U     |   | <b>0.26</b> |   | 0.20 U      |   | 0.20 U        |   | 10 U       |   | <b>6.8</b>  |   | -   |
| Aroclor-1254 | 11097-69-1 | 10                                                         | 100                                                       | 0.20 U     |   | <b>1.1</b>  |   | <b>0.49</b> |   | <b>0.70</b>   |   | <b>120</b> |   | <b>25</b>   |   | 35% |
| Aroclor-1260 | 11096-82-5 | 10                                                         | 100                                                       | 0.20 U     |   | <b>0.46</b> |   | <b>1.2</b>  |   | <b>1.8</b>    |   | <b>45</b>  |   | 4.0 U       |   | 40% |
| Aroclor-1262 | 37324-23-5 | 10                                                         | 100                                                       | 0.20 U     |   | 0.20 U      |   | 0.20 U      |   | 0.20 U        |   | 10 U       |   | 4.0 U       |   | -   |
| Aroclor-1268 | 11100-14-4 | 10                                                         | 100                                                       | 0.20 U     |   | 0.20 U      |   | 0.20 U      |   | 0.20 U        |   | 10 U       |   | 4.0 U       |   | -   |
| Total PCBs   | 1336-36-3  | 10                                                         | 100                                                       | 0.20 U     |   | <b>1.82</b> |   | <b>1.7</b>  |   | <b>2.5</b>    |   | <b>165</b> |   | <b>31.8</b> |   | 39% |
| Sample ID    |            | TSCA: Solid Non-Porous<br>Media High Occupancy<br>Walkaway | TSCA: Solid Non-Porous<br>Media Low Occupancy<br>Walkaway | 100R-WP-06 |   | EB-062321   |   | EBLK-062421 |   |               |   |            |   |             |   |     |
| Sample Date  | CAS#       |                                                            |                                                           | 6/24/2021  | Q | 6/23/2021   | Q | 6/24/2021   | Q |               |   |            |   |             |   |     |
|              |            | (µg/Wipe)                                                  | (µg/Wipe)                                                 |            |   |             |   |             |   |               |   |            |   |             |   |     |
| Aroclor-1016 | 12674-11-2 | 10                                                         | 100                                                       | 8.0 U      |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1221 | 11104-28-2 | 10                                                         | 100                                                       | 8.0 U      |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1232 | 11141-16-5 | 10                                                         | 100                                                       | 8.0 U      |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1242 | 53469-21-9 | 10                                                         | 100                                                       | 8.0 U      |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1248 | 12672-29-6 | 10                                                         | 100                                                       | 8.0 U      |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1254 | 11097-69-1 | 10                                                         | 100                                                       | <b>32</b>  |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1260 | 11096-82-5 | 10                                                         | 100                                                       | <b>37</b>  |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1262 | 37324-23-5 | 10                                                         | 100                                                       | 8.0 U      |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Aroclor-1268 | 11100-14-4 | 10                                                         | 100                                                       | 8.0 U      |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |
| Total PCBs   | 1336-36-3  | 10                                                         | 100                                                       | <b>69</b>  |   | 0.20 U      |   | 0.20 U      |   |               |   |            |   |             |   |     |

Key:

TSCA - Toxic Substance Control Act

µg/cm<sup>2</sup> - micrograms per squared centimeters**Bold** results indicate detections of the analyte

Shaded results indicate an exceedance of the high occupancy walkway criteria

Italicized results indicate an exceedance of the low occupancy walkway criteria

U - Analyte not detected; limit of quantitation listed

Table D-6: Stone 2025 Supplemental Site Investigation Report

Concentrations of Polychlorinated Biphenyls in Solid (Porous) Media

| Sample ID    |            | TSCA: Solid Porous Media<br>High Occupancy<br>Walkaway | TSCA: Solid Porous Media<br>High Occupancy Cap | TSCA: Solid Porous Media<br>Low Occupancy No Cap | 100R-MS-01  |   | 100R-MS-2   |   | 100R-MS-03  |   | 100R-MS-03-FD |   | RPD |
|--------------|------------|--------------------------------------------------------|------------------------------------------------|--------------------------------------------------|-------------|---|-------------|---|-------------|---|---------------|---|-----|
| Sample Date  | CAS#       |                                                        |                                                |                                                  | 6/23/2021   | Q | 6/23/2021   | Q | 6/23/2021   | Q | 6/23/2021     | Q |     |
|              |            | (mg/Kg)                                                | (mg/Kg)                                        | (mg/Kg)                                          |             |   |             |   |             |   |               |   |     |
| Aroclor-1016 | 12674-11-2 | 1                                                      | 10                                             | 25                                               | 0.097       | U | 0.096       | U | 0.097       | U | 0.097         | U | -   |
| Aroclor-1221 | 11104-28-2 | 1                                                      | 10                                             | 25                                               | 0.097       | U | 0.096       | U | 0.097       | U | 0.097         | U | -   |
| Aroclor-1232 | 11141-16-5 | 1                                                      | 10                                             | 25                                               | 0.097       | U | 0.096       | U | 0.097       | U | 0.097         | U | -   |
| Aroclor-1242 | 53469-21-9 | 1                                                      | 10                                             | 25                                               | 0.097       | U | 0.096       | U | 0.097       | U | 0.097         | U | -   |
| Aroclor-1248 | 12672-29-6 | 1                                                      | 10                                             | 25                                               | 0.097       | U | <b>0.11</b> |   | 0.097       | U | 0.097         | U | -   |
| Aroclor-1254 | 11097-69-1 | 1                                                      | 10                                             | 25                                               | <b>0.13</b> |   | <b>0.39</b> |   | <b>0.93</b> |   | <b>0.85</b>   |   | 9%  |
| Aroclor-1260 | 11096-82-5 | 1                                                      | 10                                             | 25                                               | 0.097       | U | <b>0.25</b> |   | <b>1.3</b>  |   | <b>1.2</b>    |   | 8%  |
| Aroclor-1262 | 37324-23-5 | 1                                                      | 10                                             | 25                                               | 0.097       | U | 0.096       | U | 0.097       | U | 0.097         | U | -   |
| Aroclor-1268 | 11100-14-4 | 1                                                      | 10                                             | 25                                               | 0.097       | U | 0.096       | U | 0.097       | U | 0.097         | U | -   |
| Total PCBs   | 1336-36-3  | 1                                                      | 10                                             | 25                                               | <b>0.13</b> |   | <b>0.75</b> |   | <b>2.2</b>  |   | <b>2.1</b>    |   | 8%  |

Key:

TSCA - Toxic Substance Control Act

mg/kg - milligrams per kilogram (parts per million)

**Bold** results indicate detections of the analyte

Shaded results indicate an exceedance of the high occupancy walkway criteria

U - Analyte not detected; limit of quantitation listed



Table D-6: Stone 2025 Supplemental Site Investigation Report

Concentrations of Polychlorinated Biphenyls in Soil

| Sample ID    |            | VSS - Resident Soil | VSS - Non-resident Soil | TSCA: Solid Porous Media High Occupancy Walkaway | 100R-SB-101-2.0 |   | 100R-SB-102-2.0 |   |
|--------------|------------|---------------------|-------------------------|--------------------------------------------------|-----------------|---|-----------------|---|
| Sample Date  | CAS#       |                     |                         |                                                  | 6/29/2021       | Q | 6/29/2021       | Q |
|              |            | (mg/Kg)             | (mg/Kg)                 | (mg/Kg)                                          |                 |   |                 |   |
| Aroclor-1016 | 12674-11-2 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1221 | 11104-28-2 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1232 | 11141-16-5 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1242 | 53469-21-9 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1248 | 12672-29-6 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1254 | 11097-69-1 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1260 | 11096-82-5 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1262 | 37324-23-5 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Aroclor-1268 | 11100-14-4 | NE                  | NE                      | 1                                                | 0.089           | U | 0.094           | U |
| Total PCBs   | 1336-36-3  | 0.11                | 0.68                    | 1                                                | 0.089           | U | 0.094           | U |

Key:

Vermont Soil Standards from Investigation and Remediation of Contaminated Properties Rule, February 2024

TSCA - Toxic Substance Control Act

mg/kg - milligrams per kilogram (parts per million)

**Bold** results indicate detections of the analyte

NE - screening level not established

U - Analyte not detected; limit of quantitation listed

---

## Appendix E: Stone Site-Specific Protocol SEI-102350.3.0

---

---

## SITE SPECIFIC PROTOCOL

SSP SEI-102350.3.0

### ***Procedure for Cutting Concrete and Masonry at 100 River Street in Springfield, Vermont***

Date Issued: 04/28/2011

Revision Number: 0

Date of Revision: NA

---

#### **1.0 OBJECTIVE**

This Site Specific Protocol (SSP) provides a framework for current and future users to perform concrete coring or cutting of concrete and masonry surfaces at the Site that breach the remedial barrier.

---

#### **2.0 BACKGROUND**

The former Fellows Gear Shaper facility located at 100 River Street in Springfield, Vermont (the Site) is currently undergoing remedial activities to mitigate exposure to contamination resulting from approximately 100 years of machine manufacturing. As part of these remedial efforts, a barrier (henceforth referred to as the remedial barrier) has been installed in occupied areas of the site that have been shown to contain polychlorinated biphenyls (PCBs). For interior areas, the remedial barrier minimally includes a cap of either concrete or asphalt on floors in former machine areas and two (2) coats of epoxy paint on walls in machine areas. Details regarding the remedial barrier can be found in the following documents:

*Notification of Self-Implementing PCB Cleanup, Remainder of PVDC Building and Property, 100 River Street, Springfield, Vermont, the Johnson Company, April 28, 2010*

*Corrective Action Plan for Remediation of Soil and Groundwater Contamination PVDC Property (Former Fellows Gear Shaper) Site # 97-2235 100 River Street Springfield, Vermont, the Johnson Company, October 29, 2009*

*Response to Comments, Amendment 1 to PVDC TSCA Cleanup Notification and proposed scope of services for additional Site characterization, Stone Environmental Inc., August 10, 2010.*

*Corrective Action Plan Amendment for Remediation of Soil and Building Material Contamination, SMS*

---

### **3.0 POLICIES**

All activities performed at the Site which in anyway pierce the remedial barrier installed under the Notification for Risk Based Cleanup under the Toxic Substance Control Act (TSCA), which include but are not limited to drilling, coring, hammering or sawing concrete or masonry wall, shall be conducted in strict accordance with this SSP.

Site personnel performing tasks that fall under this SSP shall document the occurrence using the forms included as Attachment 1 of this SSP. Cleanup verification sampling shall also be recorded.

Samples collected for cleanup verification shall be transported under Chain of Custody to the contract laboratory.

---

### **4.0 SAFETY ISSUES**

Contractors performing activities described within this SSP shall be 40 hour OSHA HAZWOPER trained prior to initiating intrusive work at the Site.

To prevent 1) personal exposure to PCB-contaminated concrete or masonry dust and 2) migration of contaminated dust from the work area to other portions of the Site, staff performing tasks described in this SSP shall don disposable coveralls and air purifying respirators (APRs) equipped with a P100 filter.

Site personnel donning full face mask APRs are recommended to undergo fit testing prior to use in accordance with their respective corporate health and safety program.

---

### **5.0 PROCEDURES**

The following sections describe requirements for performing breaches to the remedial barrier based on assumed practices at the time of issuance of this SSP. If additional types of remedial barrier breaches are required to perform a maintenance or remodeling task, the Site owner is required to revise this SSP and issue to US EPA Region I TSCA coordinator and VT DEC.

In general terms, to the extent possible, contaminated media, including but not limited to concrete, concrete dust, masonry, soil and wet saw cutting water, shall be contained in a manner to prevent their migration from the work area. Following completion of work efforts, all surfaces within the exclusion zone and non disposable equipment shall be decontaminated.

#### **5.1 Site Preparation**

Prior to initiating cutting or coring activities, a work area and exclusion zone shall be set up to prevent the spreading of contamination from the proposed penetration of the remedial barrier. The work area shall be constructed only as large enough to safely perform the work. The work area shall

be confined by polyethylene walls and ceiling taped to staging or other framework, creating an envelope around the work area to contain dust.

The exclusion area shall consist of polyethylene sheeting laid on the ground. The exclusion area shall be used by staff personnel to don, remove and contain protective coveralls and decontaminate equipment; no equipment shall leave the exclusion zone without being decontaminated (see Section 5.3); if a piece of equipment enters the exclusion zone, it shall be considered contaminated.

#### **5.1.1 Site Preparation Materials**

- 6 mil polyethylene sheeting
- Duct tape
- Wet-Dry Vacuum equipped with HEPA filter
- Staging
- Department of Transportation (DOT)-approved liquid and solid hazardous waste containers of sufficient volume for the task.

### **5.2 Drilling, Coring and Cutting**

Drilling, coring and/or cutting activities shall be performed by a sufficient number of staff such that 1) the work may be performed safely, and 2) cuttings and or wet-saw water can be contained. Personnel shall use a dedicated wet-dry vacuum to contain dust, cuttings and cutting water as they are produced.

Solid wastes produced during cutting activities shall be contained within labeled, DOT-approved 55-gallon steel drums or suitable replacement based on volume (e.g. lined cubic yard boxes or roll off). Liquid wastes shall be contained within labeled DOT-approved 55-gallon steel drums or polyethylene totes, as deemed appropriate based on volume.

### **5.3 Decontamination Procedures**

#### **5.3.1 Decontamination Equipment/Materials**

- Potable water
- Sorbent pads
- MyCelX liquid (Attachment 1)
- Wet-Dry Vacuum equipped with HEPA filter
- Alconox or other phosphate free detergent
- Buckets, brushes and decontamination tray.

Following completion of work activities, all cutting/coring/drilling equipment shall be decontaminated by first rinsing with potable water, followed by an Alconox solution scrub and

finally using a sorbent pad soaked with MyCelX liquid. Decontamination shall occur in a tray to contain all rinsate and decontamination fluids. All decontamination fluids will be transferred to drums or vessel of suitable size.

Floors and walls within the work area shall be vacuumed using a HEPA filter-equipped wet-dry vacuum. Following vacuuming, floors and walls shall be wiped clean using a MyCelX pad.

Decontamination fluids shall be sampled and analyzed for PCBs via EPA Method 8082 for waste disposal characterization. Solid debris, including concrete, masonry, spent decontamination materials, will be disposed in accordance to concentration data for the area where the drilling/cutting occurred as presented in the CAP and CAP Amendment.

## **5.4 Restoration**

Following completion of cutting and installation activities, the remedial barrier shall be restored to its pre-work condition based on the specifications of the CAP and/or CAP Amendment.

## **5.5 Cleanup Verification**

To ensure that post-work decontamination procedures are adequate to prevent exposure to PCB-contaminated media, cleanup verification wipe samples shall be collected in accordance with SSP 102350.2.0, which is presented below for convenience.

### **5.5.1 Equipment Checklist**

- 11 cm diameter Whatman filter papers or cotton gauze pads
- 40 mL VOA vials prepared with 5 mL of hexane
- Stainless steel forceps
- 10 cm by 10 cm template (disposable or stainless steel)
- Teflon<sup>®</sup> gloves (e.g. Silver Shields)
- Full Face APR with organic vapor cartridges
- Cooler with ice

### **5.5.2 Procedure**

To prevent release of hexane to the environment, wipes for PCB sampling will be prepared prior to departing for field activities by laboratory personnel. Wipes are to be prepared by placing a filter paper or gauze pad into a 40 mL VOA containing 5 mL hexane. Wipes should be well wetted, but not dripping, with solvent.

The moistened wipe is held with a pair of stainless steel forceps and rubbed over a 100-cm<sup>2</sup> area (delineated by the template) of the sample surface to obtain the sample.

PCB wipe samples should be placed in a pre-cleaned, labeled 40 mL VOA vial with the cap off to allow for the hexane to evaporate prior to placing in the sample cooler. This step should be conducted in an open air environment. Following the drying step, vials should be capped and stored in an ice-filled cooler for shipment to the contract laboratory..

Sample collection data should be entered into the field form included in Attachment 2 and on the chain of custody form.

Forceps should be thoroughly rinsed with decontamination-grade hexane solvent and wiped with a disposable cloth. New Teflon<sup>®</sup> gloves should be donned prior to collecting the next sample.

Samples shall be transported under chain of custody to the contract laboratory for PCB analysis via EPA Method 8082 with manual Soxhlet extraction with 48 hour turn-around or as deemed appropriate based on the project schedule.

The number of cleanup verification samples shall be based upon the type and extent of work performed in accordance with the following:

| Type of Work               | Number of Samples                    |
|----------------------------|--------------------------------------|
| Concrete Coring            | 1 per location                       |
| Concrete Trenching/Cutting | 1 per every 20 linear feet of trench |
| Brick/Masonry drilling     | 1 per ever 5 locations.              |

In instances where more than 2 samples are to be collected, a field duplicate sample shall be collected in the same manner as described above at a location immediately adjacent to the original.

## **5.6 Reporting**

Activities performed under this SSP shall be documented using the attached Maintenance and Restoration Form. Variations from this SSP should be noted in the space provided. Upon completion and receipt of concentration results of cleanup verification samples, the Maintenance and Restoration Form shall be forwarded to US EPA Region I TSCA coordinator, the VT DEC, Site owner, and Environmental Consultant.

---

## **6.0 RESPONSIBILITIES**

Stone field staff are responsible for following and implementing all procedures outline within this SSP. Care shall be taken to avoid compromising sample and data integrity. Field staff are required to take accurate and descriptive notes. Any variations from this SSP should be noted on Stone's Observations and Remarks (O&R) forms.

---


## **7.0 DEFINITIONS**

1. PCB – Polychlorinated Biphenyl

2. SOP – Standard Operating Procedure
3. SSP – Site Specific Procedure
4. US EPA – United States Environmental Protection Agency
5. TSCA – Toxic Substance Control Act
6. VT DEC – Vermont Department of Environmental Conservation

---

#### 8.0 AUTHORIZATION

Written by: 

Date: 4/28/11

Daniel Voisin, Project Geoscientist, Stone Environmental, Inc.

Approved by: 

Date: 4-28-11

Eric Swiech, Senior Hydrogeologist, Director of Consulting Services, Stone Environmental, Inc.

---

#### 9.0 REVISION HISTORY

Not Applicable



---

## Appendix F: Health and Safety Plan

---

**SECTION 1: GENERAL INFORMATION AND DISCLAIMER**

|                  |                  |                      |          |
|------------------|------------------|----------------------|----------|
| PROJECT NAME:    | 100 River Street | PROJECT NUMBER:      | 20231131 |
| PROJECT MANAGER: | David Jensen     | SITE SAFETY OFFICER: | TBD      |
| PREPARED BY:     | Sarah Rathay     | DATE:                | 8/4/2025 |

NOTE: This site specific Health and Safety Plan – Long Form (HASP-LF) has been prepared for use by Stone Environmental, Inc. (Stone) employees for work at this site / facility. The HASP-LF has been written for the specific site / facility conditions, purposes, tasks, dates and personnel specified, and must be amended and reviewed by those personnel named in Section 4 if these conditions change. Stone is not responsible for its use by others.

Subcontractors shall be solely responsible for the health and safety of their employees and shall comply with all applicable laws and regulations. In accordance with 1910.120(b)(1)(iv) and (v), Stone will inform subcontractors of the site / facility emergency response procedures, and any potential fire, explosion, health, safety or other hazards by making this HASP-LF and site information obtained by others available during regular business hours. All contractors and subcontractors are responsible for: (1) developing their own Health and Safety Plan, including a written Hazard Communication Program and any other written hazard specific or safety programs required by federal, state and local laws and regulations, that details subcontractor tasks, potential or actual hazards identified as a result of a risk analysis of those tasks, and the engineering controls, work practices and personal protective equipment to be utilized to minimize or eliminate employee exposure to the hazard; (2) providing their own personal protective equipment; (3) providing documentation that their employees have been health and safety trained in accordance with applicable federal, state and local laws and regulations; (4) providing evidence of medical surveillance and medical approvals for their employees; and (5) designating their own site safety officer responsible for ensuring that their employees comply with their own Health and Safety plan and taking any other additional measures required by their site activities.

Providing a copy of this Stone HASP-LF to subcontractors does not establish, nor is it intended to establish, a "joint employer" relationship between the Contractor and Stone. This allowance does not establish, nor is it intended to establish, a direct or indirect employer/employee relationship with subcontractor's employees. In addition, if any site has a HASP prepared by another contractor, that document should be made available to Stone Staff.

**SECTION 2: EMERGENCY CONTACT INFORMATION**

| LOCAL RESOURCES                  | NAME/ADDRESS:                                                                                    | NON-EMERGENCY PHONE: |
|----------------------------------|--------------------------------------------------------------------------------------------------|----------------------|
| EMERGENCY MEDICAL SERVICES       | Springfield Hospital: Emergency Department<br>25 Ridgewood Rd – Floor 1<br>Springfield, VT 05156 | 802-885-7540         |
| HOSPITAL (attach map/directions) | Springfield Hospital<br>25 Ridgewood Rd<br>Springfield, VT 05156                                 | 802-885-2151         |
| FIRE DEPARTMENT                  | Springfield Fire Department<br>77 Hartness Ave<br>Springfield, VT 05156                          | 802-885-4546         |
| POLICE / SECURITY                | Springfield Police Department<br>201 Clinton St<br>Springfield, VT 05156                         | 802-885-2113         |

**SITE SPECIFIC HEALTH AND SAFETY PLAN**

|                            |                                                                 |                                |
|----------------------------|-----------------------------------------------------------------|--------------------------------|
| HAZMAT / SPILL / OTHER     | Absolute Spill Response, LLC<br>21 Metro Way<br>Barre, VT 05641 | 802-242-2011                   |
| <b>CORPORATE RESOURCES</b> | <b>NAME</b>                                                     | <b>PHONE (OFFICE AND CELL)</b> |
| CORPORATE HEALTH & SAFETY  | Katrina Mattice                                                 | 518-366-5034                   |
| PROJECT MANAGER            | David Jensen                                                    | 802-318-7828                   |
| SITE SAFETY OFFICER        | TBD                                                             | TBD                            |

**SECTION 3: PROJECT INFORMATION**

|                                         |                                      |                                     |                                              |
|-----------------------------------------|--------------------------------------|-------------------------------------|----------------------------------------------|
| SITE NAME:                              | 100 River Street                     | SITE CLIENT CONTACT/PHONE:          | Mark Ellenbogen<br>609-828-0751              |
| ADDRESS/TOWN/STATE:                     | 100 River Street,<br>Springfield, VT | CLIENT SITE SAFETY CONTACT:         | Ted Foster, Building Manager<br>802-258-0454 |
| ANTICIPATED DATE(S) OF SITE ACTIVITIES: |                                      | TBD                                 |                                              |
| <b>SITE/FACILITY TYPE:</b>              |                                      |                                     |                                              |
| <input type="checkbox"/>                | ACTIVE                               | <input type="checkbox"/>            | HAZARDOUS (RCRA)                             |
| <input checked="" type="checkbox"/>     | BROWNFIELD                           | <input type="checkbox"/>            | INACTIVE                                     |
| <input type="checkbox"/>                | CONSTRUCTION                         | <input type="checkbox"/>            | NON-HAZARDOUS LANDFILL                       |
| <input type="checkbox"/>                | FIFRA                                | <input checked="" type="checkbox"/> | STATE                                        |
| <input type="checkbox"/>                | HAZARDOUS (CERCLA / SUPERFUND)       | <input type="checkbox"/>            | UST / LUST                                   |
| <b>INVESTIGATION TYPE:</b>              |                                      |                                     |                                              |
| <input type="checkbox"/>                | AIR                                  | <input checked="" type="checkbox"/> | INDOOR / VAPOR                               |
| <input type="checkbox"/>                | AIR / ODOR                           | <input checked="" type="checkbox"/> | INSPECTION                                   |
| <input type="checkbox"/>                | AUDIT                                | <input type="checkbox"/>            | INVESTIGATION SURVEY                         |
| <input checked="" type="checkbox"/>     | CONSTRUCTION                         | <input type="checkbox"/>            | LANDFILL                                     |
| <input checked="" type="checkbox"/>     | ENVIRONMENTAL                        | <input type="checkbox"/>            | PRE-JOB VISIT                                |
| <input type="checkbox"/>                | GROUNDWATER                          | <input type="checkbox"/>            | SEDIMENT                                     |
| <input type="checkbox"/>                | HAZARDOUS WASTE                      | <input type="checkbox"/>            | SOLID WASTE                                  |
| <input type="checkbox"/>                | HYDROGEOLOGY                         | <input checked="" type="checkbox"/> | SUBCONTRACTOR OVERSIGHT                      |

**FIELD TASKS:**

 Label with a unique identifier for use in later sections (*Sn* = Stone tasks, *On* = tasks performed by others)

|    |                                              |
|----|----------------------------------------------|
| S1 | Contractor oversight                         |
| S2 | Waste characterization                       |
| S3 | Cleanup verification and indoor air sampling |
| S4 | Engineered barrier inspections               |
|    | Click or tap here to enter text.             |

**DIGSAFE INFORMATION:**

|                       |                                         |                                           |                                  |
|-----------------------|-----------------------------------------|-------------------------------------------|----------------------------------|
| DIGSAFE TICKET #:     | DigSafe not required, no intrusive work |                                           |                                  |
| MEMBER UTILITIES:     | Click or tap here to enter text.        | MEMBER UTILITIES CONTACT INFORMATION:     | Click or tap here to enter text. |
| NON-MEMBER UTILITIES: | Click or tap here to enter text.        | NON-MEMBER UTILITIES CONTACT INFORMATION: | Click or tap here to enter text. |

**SECTION 4: PROJECT SAFETY ORGANIZATION, HEALTH AND SAFETY TRAINING, AND MEDICAN SURVEILLANCE**
**PROJECT HEALTH AND SAFETY ROLES, RESPONSIBILITIES AND COORDINATION**

|                   |                                  |                                             |                                  |
|-------------------|----------------------------------|---------------------------------------------|----------------------------------|
| SENIOR MANAGER:   | Daniel Voisin                    | CORPORATE HEALTH & SAFETY MANAGER:          | Katrina Mattice                  |
| PROJECT MANAGER:* | David Jensen                     | SITE SAFETY OFFICER:*                       | TBD                              |
| FIELD TEAM:*      | TBD                              | SITE SAFETY OFFICER (ALT):*                 | TBD                              |
|                   | Click or tap here to enter text. | SUBCONTRACTORS AND OTHER ON-SITE PERSONNEL: | Republic Services                |
|                   | Click or tap here to enter text. |                                             | Construction Manager - TBD       |
|                   | Click or tap here to enter text. |                                             | Driller (Well Closure) - TBD     |
|                   | Click or tap here to enter text. |                                             | Click or tap here to enter text. |

\*NOTE: Attach evidence of applicable training and medical surveillance to this HASP-LF for all on-site Stone personnel.

A summary of the responsibilities for the roles listed above is as follows:

The **Senior Manager** (SM) is ultimately responsible for project performance. The SM seeks and gets appropriate approvals for risk management decisions (e.g. Legal Counsel, Corporate Health and Safety, Other On-Site HASPs), and selects an effective and qualified project team. The SM supports the Project Manager with appropriate resources. The Senior Manager is the chief liaison with the client and will coordinate Stone Project Managers and Resources to respond to the client's needs.

The **Project Manager** (PM) has the responsibility for executing the project in accordance with the scope of work and good engineering practice. The PM will supervise the allocation of resources and staff to implement specific aspects of this HASP-LF and may delegate

authority to expedite and facilitate any application of the program. The PM implements and executes an effective program of site-specific personnel protection and accident prevention. The Project Manager reports to the Program Manager.

The **Corporate Health and Safety Officer (HSO)** is responsible for Stone's overall Health and Safety Program and provides project guidance on appropriate project engineering controls, work practices, and personal protective equipment. HSO also reviews and approves HASPs in accordance with Section 1.

The **Site Safety Officer (SSO)** is responsible for interpreting and implementing the site health and safety provisions set out in this HASP-LF and will guide the efforts of field team personnel in their day-to-day compliance with this HASP-LF. The SSO has the ability and authority to make necessary changes or additions to this HASP-LF and provide technical assistance to field team personnel on problems relating to worksite safety. The SSO has the authority to correct safety-related deficiencies in materials or practice and to halt all site activities if necessary.

The **Alternate Site Safety Officer (ASSO)** is assigned all duties and responsibilities of the Site Safety Officer in his/her absence.

**Field Team Personnel** are responsible for implementing the procedures set forth in the HASP-LF; taking all reasonable precautions to prevent injury to themselves and their fellow employees, performing only those tasks that they believe they can do safely, and immediately report any accidents and/or unsafe conditions in accordance with Section 1.

**Other On-Site Personnel**, including subcontractors, have access to this HASP-LF and are designated to carry out the stated project job functions on site. **NOTE:** subcontractors and other companies are solely responsible for the health and safety of their employees and shall comply with all applicable laws and regulations as described in Section 1.

## SECTION 5: HAZARD ANALYSIS

### ACTUAL OR POTENTIAL PHYSICAL HAZARDS (check all that apply)

|                                     |                                     |                                     |                                  |                                     |                           |                                     |                                                 |
|-------------------------------------|-------------------------------------|-------------------------------------|----------------------------------|-------------------------------------|---------------------------|-------------------------------------|-------------------------------------------------|
| <input type="checkbox"/>            | ANIMALS / PLANTS                    | <input type="checkbox"/>            | EXCAVATIONS<br>(SEE SECTION 13)  | <input type="checkbox"/>            | IONIZING<br>RADIATION     | <input checked="" type="checkbox"/> | SCAFFOLDING                                     |
| <input checked="" type="checkbox"/> | ASBESTOS / LEAD                     | <input type="checkbox"/>            | EXTREME COLD<br>(SEE SECTION 10) | <input type="checkbox"/>            | LIGHT RADIATION           | <input type="checkbox"/>            | SHARP OBJECTS                                   |
| <input checked="" type="checkbox"/> | CHEMICAL<br>EXPOSURE (SEE<br>BELOW) | <input type="checkbox"/>            | FALL > 6 FEET                    | <input type="checkbox"/>            | LIMITED<br>CONTACT        | <input type="checkbox"/>            | STEEP / UNEVEN TERRAIN                          |
| <input type="checkbox"/>            | CONFINED SPACE<br>(SEE BELOW)       | <input type="checkbox"/>            | FALLING OBJECTS                  | <input checked="" type="checkbox"/> | MOVING PARTS              | <input checked="" type="checkbox"/> | TRAFFIC                                         |
| <input type="checkbox"/>            | DEMOLITION                          | <input type="checkbox"/>            | HEAT STRESS                      | <input checked="" type="checkbox"/> | NOISE > 85 DB             | <input type="checkbox"/>            | WEATHER CONDITIONS<br>(LIGHTNING,<br>TORNADOES) |
| <input type="checkbox"/>            | DRILLING                            | <input checked="" type="checkbox"/> | HEAVY<br>EQUIPMENT               | <input type="checkbox"/>            | NON-IONIZING<br>RADIATION | <input type="checkbox"/>            | OTHER:                                          |
| <input checked="" type="checkbox"/> | DRUM HANDLING                       | <input checked="" type="checkbox"/> | HEAVY LIFTING                    | <input checked="" type="checkbox"/> | POWERED<br>PLATFORMS      | <input type="checkbox"/>            | Click or tap here to enter text.                |
| <input type="checkbox"/>            | DUST, HARMFUL                       | <input type="checkbox"/>            | HUNTING SEASON                   | <input type="checkbox"/>            | POOR VISIBILITY           | <input type="checkbox"/>            | Click or tap here to enter text.                |
| <input type="checkbox"/>            | ELECTRICAL                          | <input type="checkbox"/>            | IMMERSION                        | <input type="checkbox"/>            | ROLLING OBJECTS           | <input type="checkbox"/>            | Click or tap here to enter text.                |

**PRESENCE OF HAZARDOUS MATERIALS STORED OR USED ON SITE:**

| CURRENT                             | FORMER                   | TYPE                               | CURRENT                             | FORMER                   | TYPE                                    |
|-------------------------------------|--------------------------|------------------------------------|-------------------------------------|--------------------------|-----------------------------------------|
| <input type="checkbox"/>            | <input type="checkbox"/> | EXPLOSIVES                         | <input type="checkbox"/>            | <input type="checkbox"/> | TOXIC / INFECTIOUS                      |
| <input type="checkbox"/>            | <input type="checkbox"/> | COMPRESSED GASES                   | <input type="checkbox"/>            | <input type="checkbox"/> | RADIOACTIVE                             |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | FLAMMABLE /<br>COMBUSTIBLE LIQUIDS | <input type="checkbox"/>            | <input type="checkbox"/> | CORROSIVE                               |
| <input type="checkbox"/>            | <input type="checkbox"/> | FLAMMABLE / REACTIVE<br>SOLIDS     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | STORED HAZARDOUS WASTE                  |
| <input type="checkbox"/>            | <input type="checkbox"/> | OXIDIZERS                          | <input type="checkbox"/>            | <input type="checkbox"/> | OTHER: Click or tap here to enter text. |

| CHEMICAL HAZARDS OF CONTAMINANTS INFORMATION |                  |                                          |                                                                                                                                        |                   |                   |
|----------------------------------------------|------------------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------|
| SUBSTANCES INVOLVED                          | CHARACTERISTICS* | MEDIA**                                  | EST. CONCENTRATIONS                                                                                                                    | LOWEST PEL OR TLV |                   |
|                                              |                  |                                          |                                                                                                                                        | CONCENTRATION     | UNITS             |
| PCBs                                         | TO               | AIR, WL, WS, WD, OT – Building materials | Non-porous media: $\leq 165$ ug/100 cm <sup>2</sup><br><br>Porous media: $\leq 76$ mg/kg<br><br>Bulk product (paint): $\leq 198$ mg/kg | 1 TWA             | mg/m <sup>3</sup> |
| Lead                                         | TO               | WS, OT – Building materials              | Unknown                                                                                                                                | 50 TWA            | ug/m <sup>3</sup> |
|                                              |                  |                                          |                                                                                                                                        |                   |                   |
|                                              |                  |                                          |                                                                                                                                        |                   |                   |
|                                              |                  |                                          |                                                                                                                                        |                   |                   |

\*Characteristics: CA (corrosive, acid), CC (corrosive, caustic), IG (ignitable), RA (radioactive), VO (volatile), TO (toxic), RE (reactive), BIO (infectious), UN (unknown), OT (other, describe)

\*\*Media Types: GW (ground water), SW (surface water), WW (wastewater), AIR (air), SG (soil, gas), SL (soil), SD (sediment), WL (waste, liquid), WS (waste, solid), WD (waste, sludge), WG (waste, gas), OT (other, describe).

| DESCRIBE POTENTIAL FOR CONTACT WITH EACH MEDIA TYPE FOR EACH OF THE MPI TASKS LISTED IN SECTION 3: |                                                       |                                          |                   |
|----------------------------------------------------------------------------------------------------|-------------------------------------------------------|------------------------------------------|-------------------|
| MPI TASK                                                                                           | ROUTE OF EXPOSURE (INHAL / INGEST / CONTACT / ABSORB) | POTENTIAL FOR CONTACT (HIGH / MED / LOW) | METHOD OF CONTROL |
| S1 - Contractor oversight                                                                          | Contact, inhalation                                   | MED                                      | PPE               |
| S2 - Waste characterization                                                                        | Contact, inhalation, ingestion                        | MED                                      | PPE               |

|                                                   |                     |     |                          |
|---------------------------------------------------|---------------------|-----|--------------------------|
| S3 - Cleanup verification and indoor air sampling | Contact, inhalation | MED | PPE, engineered barriers |
| S4 - Engineered barrier inspections               | Inhalation          | LOW | PPE, engineered barriers |
|                                                   |                     |     |                          |



**SECTION 6: SITE CONTROL MEASURES**
**WORK ZONES – EXCAVATIONS, DRILLING OPERATIONS, AND HEAVY EQUIPMENT**

PERSON DESIGNATED TO COORDINATE ACCESS CONTROL AND SECURITY FOR OPERATIONS ON SITE:

David Jensen

**WORK ZONES – CONTAMINATION**

PREVAILING WIND CONDITIONS:

Westerly

CONTROL BOUNDARIES ARE IDENTIFIED BY:

Building limits, project demarcation tape

**Note:** a wind direction indicator is used to determine daily wind direction. The command post is located away from the exclusion zone or at sufficient distance to prevent exposure should a release occur. **No unauthorized person should be within this area.**

**SECTION 7: SAFETY PROCEDURES / EQUIPMENT REQUIRED**

Identify all procedures and equipment needed to eliminate or minimize exposure to hazards identified in Section 5.

|                                     |                                         |                                     |                           |                                     |                            |                                     |                                  |
|-------------------------------------|-----------------------------------------|-------------------------------------|---------------------------|-------------------------------------|----------------------------|-------------------------------------|----------------------------------|
| <input type="checkbox"/>            | AIR MONITORING EQUIPMENT                | <input type="checkbox"/>            | EYE WASH                  | <input type="checkbox"/>            | INSECT REPELLENT           | <input checked="" type="checkbox"/> | SAFETY VESTS                     |
| <input checked="" type="checkbox"/> | BARRIER TAPE                            | <input checked="" type="checkbox"/> | FALL PROTECTION EQUIPMENT | <input type="checkbox"/>            | LIGHTING – FIXED EMERGENCY | <input checked="" type="checkbox"/> | SDS - ATTACH                     |
| <input checked="" type="checkbox"/> | COMMUNICATION – OFF SITE                | <input checked="" type="checkbox"/> | FIRE EXTINGUISHERS        | <input type="checkbox"/>            | LIGHTING - HANDHELD        | <input type="checkbox"/>            | TRAFFIC CONES                    |
| <input checked="" type="checkbox"/> | COMMUNICATION – ON SITE                 | <input checked="" type="checkbox"/> | FIRST AID KIT             | <input type="checkbox"/>            | LONE WORKER                | <input type="checkbox"/>            | VENTILATION EQUIPMENT            |
| <input type="checkbox"/>            | CONFINED SPACE PROGRAM (SEE SECTION 12) | <input type="checkbox"/>            | FLOTATION DEVICE (USCG)   | <input type="checkbox"/>            | LOTO EQUIPMENT             | <input type="checkbox"/>            | OTHER:                           |
| <input type="checkbox"/>            | EMERGENCY AIR HORN                      | <input checked="" type="checkbox"/> | GFCI EXTENSION CORDS      | <input checked="" type="checkbox"/> | PPE - SEE SECTION 15       | <input type="checkbox"/>            | Click or tap here to enter text. |
| <input type="checkbox"/>            | EMERGENCY SHOWERS                       | <input type="checkbox"/>            | HARNES / LIFELINE         | <input type="checkbox"/>            | REPIRATOR - SEE SECTION 15 | <input type="checkbox"/>            | Click or tap here to enter text. |

**SECTION 8: COMMUNICATION AND SAFE WORK PRACTICE**

**COMMUNICATIONS – ON SITE:** Whenever possible, communication between site personnel should be face-to-face. Radios will be used when verbal communication is not possible. If necessary, the following hand signals will be used:

OK; I AM ALL RIGHT; I UNDERSTAND

THUMBS UP

NO; NEGATIVE

THUMBS DOWN

NEED ASSISTANCE

BOTH HANDS ON TOP OF HEAD

DANGER – LEAVE AREA IMMEDIATELY

GRIP PARTNER'S WRIST WITH BOTH HANDS

HAVING DIFFICULTY BREATHING

HANDS TO THROAT

|                                                                                                                                                                                                                                               |                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| <b>COMMUNICATIONS – OFF SITE:</b>                                                                                                                                                                                                             |                                    |
| TELEPHONE NUMBERS THAT CAN BE USED TO REACH THE COMMAND POST:                                                                                                                                                                                 | Stone Environmental – 802-229-4541 |
|                                                                                                                                                                                                                                               | David Jensen – 802-318-7828        |
| <b>SAFE WORK PRACTICES</b>                                                                                                                                                                                                                    |                                    |
| LONE WORKER: MUST ENSURE THAT SOMEONE KNOWS WHERE YOU ARE AND WHEN YOU ARE EXPECTED HOME. MUST HAVE MOBILE PHONE ACCESS AT ALL TIMES AND CONTACT SAFETY OFFICER OR DESIGNEE WHEN YOU ARE HOME SAFE (BY TEXTING OR CALLING).                   |                                    |
| A "BUDDY SYSTEM" IN WHICH ANOTHER WORKER IS CLOSE ENOUGH TO RENDER IMMEDIATE AID WILL BE IN EFFECT. CLIENTS AND/OR CONTRACTORS MAY SERVE AS A "DESIGNATED BUDDY."                                                                             |                                    |
| WHERE THE EYES OR BODY MAY BE EXPOSED TO CORROSIVE MATERIALS, SUITABLE FACILITIES FOR QUICK DRENCHING OR FLUSHING SHALL BE AVAILABLE FOR IMMEDIATE USE (SEE SECTION 7).                                                                       |                                    |
| IF DRILLING EQUIPMENT IS INVOLVED, HAVE A CURRENT UTILITY SURVEY, AND KNOW WHERE THE 'KILL SWITCH' IS.                                                                                                                                        |                                    |
| CONTACT WITH SAMPLES, EXCAVATED MATERIALS, OR OTHER CONTAMINATED MATERIALS MUST BE MINIMIZED.                                                                                                                                                 |                                    |
| ALL ELECTRICAL EQUIPMENT USED IN OUTSIDE LOCATIONS, WET AREAS OR NEAR WATER MUST BE PLUGGED INTO GROUND FAULT CIRCUIT INTERRUPTER (GFCI) PROTECTED OUTLETS (SEE SECTION 7).                                                                   |                                    |
| IN THE EVENT OF TREACHEROUS WEATHER-RELATED WORKING CONDITIONS (I.E., THUNDERSTORM, LIMITED VISIBILITY, EXTREME COLD OR HEAT) FIELD TASKS WILL BE SUSPENDED UNTIL CONDITIONS IMPROVE OR APPROPRIATE PROTECTION FROM THE ELEMENTS IS PROVIDED. |                                    |
| SMOKING, EATING, CHEWING GUM OR TOBACCO, OR DRINKING ARE FORBIDDEN EXCEPT IN CLEAN OR DESIGNATED AREAS.                                                                                                                                       |                                    |
| USE OF CONTACT LENSES NEAR CHEMICALS OR DURING USE OF RESPIRATORY PROTECTION IS PROHIBITED AT ALL TIMES.                                                                                                                                      |                                    |
| GOOD HOUSEKEEPING PRACTICES ARE TO BE MAINTAINED.                                                                                                                                                                                             |                                    |
| FOLLOW ALL SITE / FACILITY H&S REQUIREMENTS-PROTECTIVE EYEWEAR AT ALL TIMES                                                                                                                                                                   |                                    |

**SECTION 9: ENVIRONMENTAL MONITORING**

THIS SECTION NOT APPLICABLE TO SITE ACTIVITIES ☒

The following environmental monitoring instruments shall be used on site at the specified intervals and recorded in the site daily field notes. Record action limit for upgrade or stop work. **NOTE:** If monitoring period is "OTHER", monitoring schedule will be attached to this plan.

| EQUIPMENT                |                                  | CONTINUOUS               | HOURLY                   | DAILY                    | OTHER                    | ACTION LEVEL                     |
|--------------------------|----------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|----------------------------------|
| <input type="checkbox"/> | COMBUSTIBLE GAS INDICATOR        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | O <sub>2</sub> METER             | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | TOXICS                           |                          |                          |                          |                          |                                  |
| <input type="checkbox"/> | CO                               | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | H <sub>2</sub> S                 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | OTHER                            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | PID (LAMP: eV)                   | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | FID                              | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | COLORIMETRIC TUBES               | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | RADIATION                        |                          |                          |                          |                          |                                  |
| <input type="checkbox"/> | α                                | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | β                                | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | γ                                | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | RESPIRABLE DUST METER            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | NOISE METER                      | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | OTHER:                           | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |
| <input type="checkbox"/> | Click or tap here to enter text. | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Click or tap here to enter text. |

**NOTE:** monitoring equipment is calibrated according to manufacturers' instructions. Record calibration data and air concentrations in daily field notes.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>RECOMMENDED ACTION LEVELS FOR UPGRADE OR DOWNGRADE OF RESPIRATORY PROTECTION, OR SITE SHUTDOWN AND EVACUATION.</b> These are average values. Consideration should be given to the potential for release of highly toxic compounds from the waste or from reaction by-products. Levels are for persistent (> 10 min) breathing zone measurements in non-confined spaces. For unexpected conditions, stop all work and contact Corporate Health and Safety. |                                                                                                                       |
| <b>OXYGEN LEVELS</b>                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                       |
| < 19.5%                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Level B necessary for work to start / continue. Consider toxicity potential.                                          |
| 19.5% to 23.5%                                                                                                                                                                                                                                                                                                                                                                                                                                               | Work may start / continue. Investigate changes. Continuous monitoring.                                                |
| > 23.5%                                                                                                                                                                                                                                                                                                                                                                                                                                                      | PROHIBITED WORK CONDITION                                                                                             |
| <b>FLAMMABILITY / EXPLOSIVE HAZARDS</b>                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                       |
| < 10% of LEL                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Work may start / continue. Consider toxicity potential.                                                               |
| 10% to 25% of LEL                                                                                                                                                                                                                                                                                                                                                                                                                                            | Work may start / continue. Continuous monitoring.                                                                     |
| > 25% of LEL                                                                                                                                                                                                                                                                                                                                                                                                                                                 | PROHIBITED WORK CONDITION                                                                                             |
| <b>UNCARACTERIZED AIRBORNE ORGANIC VAPORS OR GASES (see above for actual action levels)</b>                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                       |
| Background                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Work may start / continue. Continue to monitor conditions.                                                            |
| 0 to 5 meter units (m.u. or ppm) above background                                                                                                                                                                                                                                                                                                                                                                                                            | Level C necessary for work to start / continue. Continuous monitoring. Use colorimetric tubes to characterize vapors. |
| 5 to 50 m.u. above background                                                                                                                                                                                                                                                                                                                                                                                                                                | Level B necessary for work to start / continue. Continuous monitoring.                                                |
| > 50 m.u. above background                                                                                                                                                                                                                                                                                                                                                                                                                                   | PROHIBITED WORK CONDITION.                                                                                            |
| <b>CHARACTERIZED AIRBORNE ORGANIC VAPORS OR GASES (see above for actual action levels)</b><br><b>NOTE:</b> Use mixture calculations (% allowed = $\frac{C_N}{EL_N}$ ) if more than one contaminant is present.                                                                                                                                                                                                                                               |                                                                                                                       |
| Up to 50% of TLV, or PET or REL                                                                                                                                                                                                                                                                                                                                                                                                                              | Work may start / continue. Continue to monitor conditions.                                                            |
| Up to 25X TLV, PEL, or REL                                                                                                                                                                                                                                                                                                                                                                                                                                   | Level C necessary for work to start / continue. Continuous monitoring.                                                |
| Up to 500X TLV, PEL or REL                                                                                                                                                                                                                                                                                                                                                                                                                                   | Level B necessary for work to start / continue. Continuous monitoring.                                                |
| > 500X TLV, PEL, OR REL                                                                                                                                                                                                                                                                                                                                                                                                                                      | PROHIBITED WORK CONDITION.                                                                                            |
| <b>RADIATION</b>                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                       |
| <0.5 mR/Hour (500 $\mu$ R)                                                                                                                                                                                                                                                                                                                                                                                                                                   | Work may start / continue. Continue to monitor conditions.                                                            |
| Up to 1 mR/Hour above background                                                                                                                                                                                                                                                                                                                                                                                                                             | Work may start / continue with Radiation Safety Officer present on site.                                              |
| > 1 mR/Hour above background                                                                                                                                                                                                                                                                                                                                                                                                                                 | PROHIBITED WORK CONDITION.                                                                                            |

|                                                                                                             |                                                                          |                                                                         |
|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>SECTION 10: PERSONAL MONITORING</b>                                                                      |                                                                          | THIS SECTION NOT APPLICABLE TO SITE ACTIVITIES <input type="checkbox"/> |
| <b>PERSONAL EXPOSURE SAMPLING</b> (consider if high concentrations of lead, mercury or arsenic are present) |                                                                          |                                                                         |
| THE FOLLOWING PERSONAL MONITORING WILL BE IN EFFECT ON SITE:                                                | None.                                                                    |                                                                         |
| <b>HEAT / COLD STRESS MONITORING</b>                                                                        |                                                                          |                                                                         |
| EXPECTED AIR TEMPERATURES:                                                                                  | Annual temperature expected to range from 10°F (winter) to 90°F (summer) |                                                                         |
| DESCRIBE HEAT / COLD STRESS MONITORING IN EFFECT:                                                           | Monitoring using visual indicators                                       |                                                                         |

**NOTE:** heat / cold stress monitoring is required for heavy exertion in PPE at temperatures over 70°F, or at temperatures below 40° wind chill equivalent.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                  |                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------------------------------------------------------|
| <b>SECTION 11: HAZARD COMMUNICATION PROGRAM</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                  | THIS SECTION NOT APPLICABLE TO SITE ACTIVITIES <input type="checkbox"/> |
| If chemicals are introduced to the site by Stone (e.g., decontamination liquids, preservatives, etc.), a copy of the applicable Safety Data Sheets (SDSs) is attached. The Site Safety Officer will review this information with all field personnel prior to the start of the project, and will inform other employers (e.g., Owner, Contractor and Subcontractors) of the availability and location of this information. The Comprehensive List of Chemicals introduced by Stone to this site is:                                                                                                                                                                                                                                                                                                                                |                                  |                                                                         |
| Alconox                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Hexane                           |                                                                         |
| Isopropyl alcohol                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Click or tap here to enter text. |                                                                         |
| All chemicals being introduced to the site, hazardous/potentially hazardous samples prepared at the site, and/or any hazardous materials previously sent to the site, that will be stored at the site or will be transported from the site by common carrier, will be packaged, labeled and identified as hazardous materials in accordance with U.S. Department of Transportation (DOT) and/or International Air Transport Association (IATA) regulations by a trained HazMat employee. At multi-employer sites, the Site Safety Officer will obtain information, if applicable, on hazardous chemicals other employers may produce or introduce to the job site to which Stone employees may be exposed, including the location of their written hazard communication program(s), labeling program(s), and Safety Data Sheet(s). |                                  |                                                                         |

|                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                  |                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------------------------------------------------------------------------|
| <b>SECTION 12: CONFINED SPACE ENTRY</b>                                                                                                                                                                                                                                                                                                                                                                                                   |                                  | THIS SECTION NOT APPLICABLE TO SITE ACTIVITIES <input checked="" type="checkbox"/> |
| If a permit-required confined space entry will be made on site, a copy of the Confined Space Entry Program, and a completed Space Pre-Entry Inspection Check List will be attached to this plan. A Confined Space Entry Permit must be completed and posted outside the confined space prior to entry, and the entry will follow the Confined Space Entry written program. Permits are to be saved and logged with project documentation. |                                  |                                                                                    |
| NAME OF COMPETENT PERSON:                                                                                                                                                                                                                                                                                                                                                                                                                 | Click or tap here to enter text. |                                                                                    |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                  |                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------------------------------------------------------------------------|
| <b>SECTION 13: EXCAVATION SAFETY</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                  | THIS SECTION NOT APPLICABLE TO SITE ACTIVITIES <input checked="" type="checkbox"/> |
| Excavations being created to accomplish Stone tasks or in progress during Stone inspection of other activities or tasks, shall be shored or sloped or otherwise protected to prevent accidental collapse prior to entry, in accordance with Subpart F of 29 CFR 1926. Stone personnel will not enter trench or excavated areas without approval of Corporate Health and Safety. If an entry into an excavation by Stone personnel is necessary, a Competent Person will be designated by the Corporate Health and Safety Officer. Excavations will not be left open overnight unless absolutely necessary. |                                  |                                                                                    |
| NAME OF COMPETENT PERSON:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Click or tap here to enter text. |                                                                                    |

|                                                                                                                                                                                                            |                              |                                     |                                             |                                     |                                         |                                     |                   |                                                                         |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------------|---------------------------------------------|-------------------------------------|-----------------------------------------|-------------------------------------|-------------------|-------------------------------------------------------------------------|--|
| <b>SECTION 14: DECONTAMINATION PROCEDURES</b>                                                                                                                                                              |                              |                                     |                                             |                                     |                                         |                                     |                   | THIS SECTION NOT APPLICABLE TO SITE ACTIVITIES <input type="checkbox"/> |  |
| Personnel and equipment leaving the Exclusion Zone (hot) shall be thoroughly decontaminated. The Site Safety Officer is responsible for monitoring adherence with this decontamination plan and SOP-5.1.n. |                              |                                     |                                             |                                     |                                         |                                     |                   |                                                                         |  |
| DECONTAMINATION STATIONS:                                                                                                                                                                                  |                              |                                     |                                             |                                     |                                         |                                     |                   |                                                                         |  |
| Cleanup verification tool decontamination (travels with field staff)                                                                                                                                       |                              |                                     |                                             |                                     | Click or tap here to enter text.        |                                     |                   |                                                                         |  |
| Click or tap here to enter text.                                                                                                                                                                           |                              |                                     |                                             |                                     | Click or tap here to enter text.        |                                     |                   |                                                                         |  |
| REQUIRED DECONTAMINATION EQUIPMENT:                                                                                                                                                                        |                              |                                     |                                             |                                     |                                         |                                     |                   |                                                                         |  |
| <input type="checkbox"/>                                                                                                                                                                                   | DECON PAD<br>(PLASTIC SHEET) | <input type="checkbox"/>            | DRY BRUSHES                                 | <input checked="" type="checkbox"/> | BUCKETS                                 | <input checked="" type="checkbox"/> | TRASH CANS / BAGS |                                                                         |  |
| <input type="checkbox"/>                                                                                                                                                                                   | WET BRUSHES                  | <input checked="" type="checkbox"/> | HOSE / SPRAY                                | <input type="checkbox"/>            | OTHER: Click or tap here to enter text. |                                     |                   |                                                                         |  |
| DECONTAMINATION SOLUTION:                                                                                                                                                                                  |                              |                                     | Alconox, isopropyl alcohol, and fresh water |                                     |                                         |                                     |                   |                                                                         |  |

| SECTION 15: PERSONAL PROTECTIVE EQUIPMENT                                    |                          |     |              |        |       |           |
|------------------------------------------------------------------------------|--------------------------|-----|--------------|--------|-------|-----------|
| List all that apply. Use same codes for clothing and boots of same material. |                          |     |              |        |       |           |
| TASK*                                                                        | RESPIRATOR/<br>CARTRIDGE | USE | CLOTHING     | GLOVES | BOOTS | OTHER     |
| S1 – Contractor oversight                                                    | N/A                      |     | D, HI-VIS    | N      | SL    | HH, G, HP |
| S2 - Waste characterization                                                  | N/A                      |     | D, HI-VIS, C | PVC, T | SL    | HH, G     |
| S3 - Cleanup verification and indoor air sampling                            | N/A                      |     | D, HI-VIS    | PVC, T | SL    | HH, G     |
| S4 - Engineered barrier inspections                                          | N/A                      |     | D, HI-VIS    | N      | SL    | HH, G     |
|                                                                              |                          |     |              |        |       |           |

\*Task list must match Section 3

#### CODES:

Respirators: HF (Half Face APR); FF (Full Face APR); ESCBA (Escape Bottle); SAR (Airline); SCBA

Cartridges: P (Particulate); OV (Organic Vapors); AG (Acid Gas); Multi (Multiple Gas / Vapor); Other

Clothing: N/S (No Special); D (Level D, pants, steel toe boots); C (Coveralls); T (Tyvek); Sx (Saranex); PT (PE Tyvek); HI-VIS (hi-visibility vest)

Gloves: Co (Cotton); Le (Leather); L (Latex); N (Nitrile); B (Butyl); Neo (Neoprene); V (Viton); PVC (Polyvinyl Chloride); PVA (Polyvinyl Alcohol); T (Teflon); O (Other)

Boots: SL (Leather Safety); H (Hip); O (Latex Overboots); CHM (Chemical Resistant)

Other: HH (Hard Hat); G (Safety Glasses); GP (Glare Protection); GI (Goggles, Impact); GS (Goggles, Splash); FS (Face Shield); HP (Hearing Protection); PFD (Personal Flotation Device)

#### SECTION 16: PERSONAL PROTECTIVE EQUIPMENT CONTINUED

|                                                                         |     |
|-------------------------------------------------------------------------|-----|
| RESPIRATORY PROTECTION WILL BE UPGRADED UNDER THE FOLLOWING CONDITIONS: | N/A |
|-------------------------------------------------------------------------|-----|

|                                |     |
|--------------------------------|-----|
| CARTRIDGE CHANGE OUT SCHEDULE: | N/A |
|--------------------------------|-----|

#### SECTION 17: EMERGENCY ACTION PLAN

The following standard emergency response procedures will be used by onsite personnel. The Site Safety Officer shall be notified of any onsite emergencies and be responsible for ensuring that the appropriate procedures are followed.

##### EVACUATION

All work activities are suspended, and the site is to be evacuated immediately, when there is a threat to life or health as determined by individual good judgment, i.e. fire, hazardous chemical spill, dangerous gas leak, severe weather (i.e., tornado, thunderstorm); or when notified by other site / facility staff and local fire or police officials. If an evacuation is called for, the emergency alarm system for weather-related, medical, fire and other evacuation emergencies is 3 short blasts on a compressed air horn or notification by the SSO or designee using a cell phone or walkie talkie. In the case of tornado or lightning strikes a designated evacuation area will be identified during the tail gate meeting. Be sure to include time and distance to these shelters to give staff time to evacuate safely. Typically, evacuation time takes about 5-10 minutes. Once off site, all staff should gather at the assigned rally point which is a minimum of 250 feet away from the incident.

**NOTE:** Evacuation from the Exclusion Zone should occur through the decontamination line if possible.

##### FIRE OR EXPLOSION

Upon discovery of a fire or an explosion, follow the procedure above for evacuating the site and notify the fire department. If a person's clothing should catch fire, instruct the person to drop to the floor and roll. If necessary, physically restrain the person and roll them around on the floor to smother the flames. Use a fire blanket or extinguisher if one is readily available and you have been trained in its use. If a person's clothing is saturated with a chemical, douse the individual with water from the nearest safety shower if available. Consult the chemical Safety Data Sheets (SDSs) for further information. Call emergency medical services if indicated by the SDSs. Never re-enter the site / facility until the emergency has been declared over and permission to re-enter has been given by site / facility health and safety staff or local fire or police officials. If any staff is unaccounted for, notify an individual in charge.

##### MEDICAL EMERGENCY

If you discover a medical emergency and are by yourself, CALL OUT FOR HELP. When someone arrives, tell them to call for help. If no one comes or you know you are alone, provide whatever care you can for 1 minute, and then make the call yourself. (See Section 2). Upon notification of an injury the SSO or alternate should evaluate the nature of the injury and shall initiate the appropriate first aid, and contact should be made for an ambulance (and other emergency services as needed) and with the designated medical facility (if

required). No one may re-enter the Exclusion Zone until the cause of the injury is determined. If applicable, local fire and police should be briefed on the situation and the potential hazards and the substances involved. When IDLH conditions exist, arrangements should be made for onsite standby of emergency services. A map for directions to the nearest hospital is attached to this plan along with a site map.

#### **LIGHTNING**

Monitor the weather. Follow the "30-30" Rule: count the time from the flash to the bang. Activate lightning safety plan at a count of 30 seconds, and don't resume activities for 30 minutes. Evacuate to hardtop metal vehicle or large enclosed structure. If outside and unable to get to shelter, crouch on the ground with your weight on the balls of your feet, head lowered, eyes closed, and ears covered.

#### **TORNADOES**

If you are outdoors and can safely drive away from the tornado, do so. If you can't drive away, abandon your vehicle and seek shelter in a nearby structure. The safest place to be is always an underground shelter, basement or safe room. If no buildings are available and driving away is not an option, stay in the car with the seat belt on. Put your head down below the windows, covering with your hands and a blanket if possible. If you can safely get noticeably lower than the level of the roadway, exit your car and lie in that area, covering your head with your hands. Never seek shelter under a bridge or overpass.

#### **FOLLOW UP**

In all situations when an onsite / facility emergency results in evacuation of the work area or a "large spill" has occurred, staff shall not resume work until the conditions resulting in the emergency have been corrected; the hazards have been reassessed by the SSO and Corporate Health and Safety Officer; the HASP has been updated if applicable; and site personnel have been briefed on any changes.

#### **SECTION 18: SPILL CONTAINMENT / CONTROL**

THIS SECTION NOT APPLICABLE TO SITE ACTIVITIES ☐

Incidental spills will be controlled in the immediate area of the spill. Such spills shall be handled utilizing precautions appropriate for the chemical characteristics specified in the SDS for the chemical including spill control methods and selection and use of minimum personal protective equipment.

For chemicals in large quantities (greater than 55 gallons), a copy of the appropriate Emergency Response Guidebook (ERG) guide shall be attached to this plan, and a spill response contractor shall be identified in Section 2.

#### **SECTION 19: ACKNOWLEDGMENTS**

| PLAN REVIEWED BY:                 | NAME            | SIGNATURE / DATE |
|-----------------------------------|-----------------|------------------|
| Senior Manager                    | Dan Voisin      |                  |
| Project Manager                   | David Jensen    |                  |
| Site Safety Officer               | TBD             |                  |
| Corporate Health & Safety Officer | Katrina Mattice |                  |

*The undersigned acknowledge that they have read the information on this HASP-LF (and attachments), understand the site / facility hazards as described and agree to comply with the components of the plan. Attach additional sheets if necessary.*

| NAME                             | SIGNATURE / DATE |
|----------------------------------|------------------|
| Click or tap here to enter text. |                  |
| Click or tap here to enter text. |                  |

Attachments:




**SITE SPECIFIC HEALTH AND SAFETY PLAN**

|                                     |                        |                          |                              |                          |                              |                          |                                |
|-------------------------------------|------------------------|--------------------------|------------------------------|--------------------------|------------------------------|--------------------------|--------------------------------|
| <input checked="" type="checkbox"/> | SDSs                   | <input type="checkbox"/> | Hazard Communication Program | <input type="checkbox"/> | Confined Space Entry Program | <input type="checkbox"/> | Respiratory Protection Program |
| <input checked="" type="checkbox"/> | Site Map               | <input type="checkbox"/> | Personal Protective Program  | <input type="checkbox"/> | DOT ERG Guides               | <input type="checkbox"/> | Activity Hazard Analysis Forms |
| <input checked="" type="checkbox"/> | Directions to hospital | <input type="checkbox"/> | Emergency Action Plan        | <input type="checkbox"/> | Daily Site Sheet             | <input type="checkbox"/> | Other:                         |

Google Maps

100 River St, Springfield, VT 05156, USA to Springfield Hospital, 25 Ridgewood Rd, Springfield, VT 05156, United States

Drive 0.7 mile, 3 min

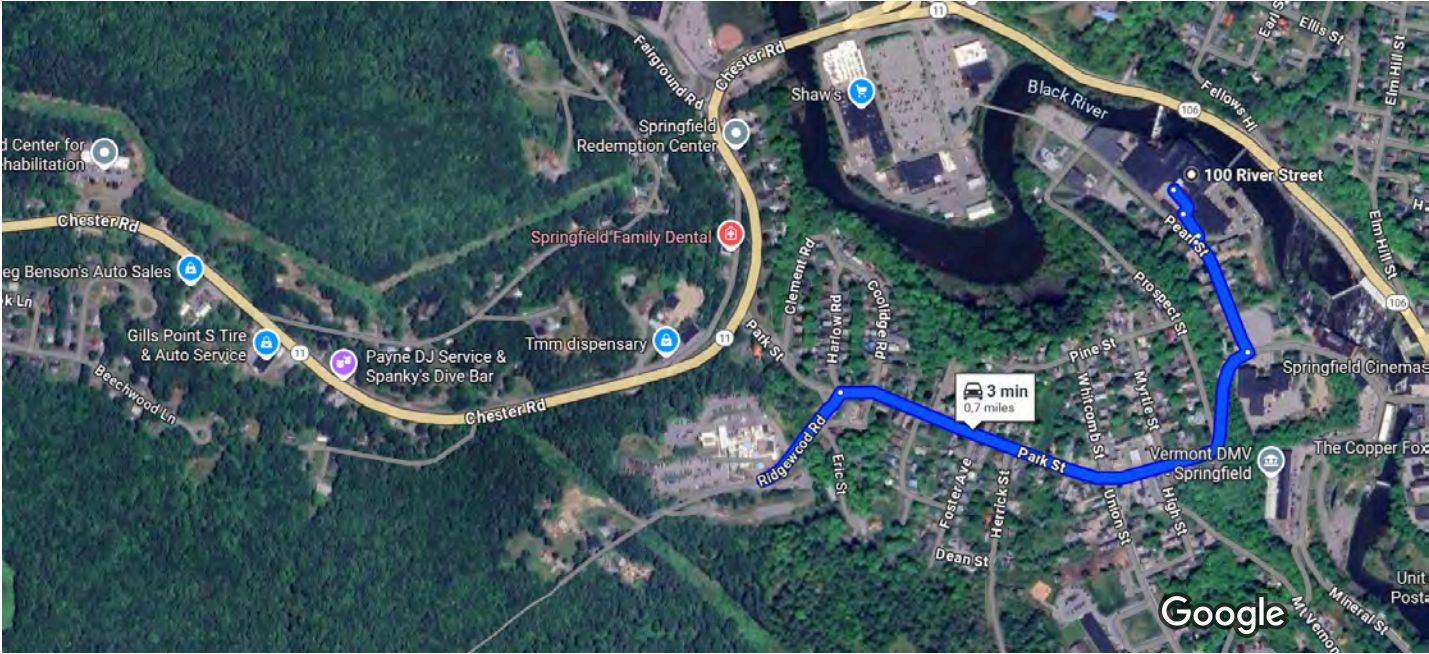

Imagery ©2025 Airbus, CNES / Airbus, Maxar Technologies, Map data ©2025 200 m

100 River St  
Springfield, VT 05156, USA

- ↑

1. Head southeast toward Pearl St

151 ft
- ↶

2. Turn left toward Pearl St

128 ft
- ↷

3. Turn right toward Pearl St

36 ft
- ↶

4. Turn left onto Pearl St

0.1 mi
- ↷

5. Turn right onto Park St

0.5 mi
- ↶

6. Turn left onto Ridgewood Rd

0.1 mi
- i

Destination will be on the right

Springfield Hospital  
25 Ridgewood Rd, Springfield, VT 05156, United States





LEGEND

- |  |                              |  |                   |
|--|------------------------------|--|-------------------|
|  | 100 RIVER ST PARCEL BOUNDARY |  | PARKING LOT       |
|  | PARCEL BOUNDARY              |  | SITE FEATURES     |
|  | FLOOR BUILDING LAYOUT        |  | STRUCTURAL COLUMN |

Sources:  
Lidar and Parcel boundaries - VCGI  
Stone Environmental Inc. conducted a building survey 7/28/2020 of cafeteria building and 65 Pearl Street to create floor plan layouts.  
A building survey was completed 4/1/2020 of 100 River Street building to create floor plan layout.

File: O:\PROJ-19\EAR\P19-124 Heartland 100 River Street\Data\AutoCAD\19-124\_COMBINED.dwg

| DRAWING CREDITS | # | DATE | DRWN | CHK'D | APP'D | DESCRIPTION |
|-----------------|---|------|------|-------|-------|-------------|
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
| REVISIONS       | # | DATE | DRWN | CHK'D | APP'D | DESCRIPTION |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
| DRAWING SCALE   | # | DATE | DRWN | CHK'D | APP'D | DESCRIPTION |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |
|                 |   |      |      |       |       |             |



STONE ENVIRONMENTAL

535 Stone Cutters Way / Montpelier / VT / 05602 / USA  
802.229.4541 / info@stone-env.com / www.stone-env.com

SITE MAP  
100 RIVER STREET  
ICP SPRINGFIELD SPE, LLC  
SPRINGFIELD VERMONT



## ALCONOX MSDS

### Section 1 : MANUFACTURER INFORMATION

**Product name:** Alconox

**Supplier:** Same as manufacturer.

**Manufacturer:** Alconox, Inc.  
30 Glenn St.  
Suite 309  
White Plains, NY 10603.

**Manufacturer emergency** 800-255-3924.

**phone number:** 813-248-0585 (outside of the United States).

**Manufacturer:** Alconox, Inc.  
30 Glenn St.  
Suite 309  
White Plains, NY 10603.

**Supplier MSDS date:** 2009/04/20

**D.O.T. Classification:** Not regulated.

### Section 2 : HAZARDOUS INGREDIENTS

| C.A.S.     | CONCENTRATION % | Ingredient Name                | T.L.V.        | LD/50                                                                              | LC/50                                                                |
|------------|-----------------|--------------------------------|---------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| 25155-30-0 | 10-30           | SODIUM DODECYLBENZENESULFONATE | NOT AVAILABLE | 438 MG/KG<br>RAT ORAL<br>1330 MG/KG<br>MOUSE ORAL                                  | NOT AVAILABLE                                                        |
| 497-19-8   | 7-13            | SODIUM CARBONATE               | NOT AVAILABLE | 4090 MG/KG<br>RAT ORAL<br>6600 MG/KG<br>MOUSE ORAL                                 | 2300 MG/M3/2H<br>RAT INHALATION<br>1200 MG/M3/2H<br>MOUSE INHALATION |
| 7722-88-5  | 10-30           | TETRASODIUM PYROPHOSPHATE      | 5 MG/M3       | 4000 MG/KG<br>RAT ORAL<br>2980 MG/KG<br>MOUSE ORAL                                 | NOT AVAILABLE                                                        |
| 7758-29-4  | 10-30           | SODIUM PHOSPHATE               | NOT AVAILABLE | 3120 MG/KG<br>RAT ORAL<br>3100 MG/KG<br>MOUSE ORAL<br>>4640 MG/KG<br>RABBIT DERMAL | NOT AVAILABLE                                                        |

### Section 2A : ADDITIONAL INGREDIENT INFORMATION

**Note:** (supplier).

CAS# 497-19-8: LD50 4020 mg/kg - rat oral.

CAS# 7758-29-4: LD50 3100 mg/kg - rat oral.

### Section 3 : PHYSICAL / CHEMICAL CHARACTERISTICS

**Physical state:** Solid

**Appearance & odor:** Almost odourless.  
White granular powder.

**Odor threshold (ppm):** Not available.

**Vapour pressure (mmHg):** Not applicable.

**Vapour density (air=1):** Not applicable.

**By weight:** Not available.

**Evaporation rate (butyl acetate = 1):** Not applicable.

**Boiling point (°C):** Not applicable.

**Freezing point (°C):** Not applicable.

**pH:** (1% aqueous solution).  
9.5

**Specific gravity @ 20 °C:** (water = 1).  
0.85 - 1.10

**Solubility in water (%):** 100 - > 10% w/w

**Coefficient of water/oil dist.:** Not available.

**VOC:** None

### Section 4 : FIRE AND EXPLOSION HAZARD DATA

**Flammability:** Not flammable.

**Conditions of flammability:** Surrounding fire.

**Extinguishing media:** Carbon dioxide, dry chemical, foam.  
Water  
Water fog.

**Special procedures:** Self-contained breathing apparatus required.  
Firefighters should wear the usual protective gear.

**Auto-ignition temperature:** Not available.

**Flash point (°C), method:** None

**Lower flammability limit (% vol):** Not applicable.

**Upper flammability limit (% vol):** Not applicable.

Not available.

**Sensitivity to mechanical impact:** Not applicable.

**Hazardous combustion products:** Oxides of carbon (COx).  
Hydrocarbons.

**Rate of burning:** Not available.

**Explosive power:** None

|                                    |
|------------------------------------|
| <b>Section 5 : REACTIVITY DATA</b> |
|------------------------------------|

**Chemical stability:** Stable under normal conditions.

**Conditions of instability:** None known.

**Hazardous polymerization:** Will not occur.

**Incompatible substances:** Strong acids.  
Strong oxidizers.

**Hazardous decomposition products:** See hazardous combustion products.

|                                       |
|---------------------------------------|
| <b>Section 6 : HEALTH HAZARD DATA</b> |
|---------------------------------------|

**Route of entry:** Skin contact, eye contact, inhalation and ingestion.

**Effects of Acute Exposure**

**Eye contact:** May cause irritation.

**Skin contact:** Prolonged contact may cause irritation.

**Inhalation:** Airborne particles may cause irritation.

**Ingestion:** May cause vomiting and diarrhea.  
May cause abdominal pain.  
May cause gastric distress.

**Effects of chronic exposure:** Contains an ingredient which may be corrosive.

**LD50 of product, species & route:** > 5000 mg/kg rat oral.

**LC50 of product, species & route:** Not available for mixture, see the ingredients section.

**Exposure limit of material:** Not available for mixture, see the ingredients section.

**Sensitization to product:** Not available.

**Carcinogenic effects:** Not listed as a carcinogen.

**Reproductive effects:** Not available.

**Teratogenicity:** Not available.

**Mutagenicity:** Not available.

**Synergistic materials:** Not available.

**Medical conditions aggravated by exposure:** Not available.

**First Aid**

**Skin contact:** Remove contaminated clothing.  
Wash thoroughly with soap and water.  
Seek medical attention if irritation persists.

**Eye contact:** Check for and remove contact lenses.  
Flush eyes with clear, running water for 15 minutes while holding eyelids open: if irritation persists, consult a physician.

**Inhalation:** Remove victim to fresh air.  
Seek medical attention if symptoms persist.

**Ingestion:** Dilute with two glasses of water.  
Never give anything by mouth to an unconscious person.  
Do not induce vomiting, seek immediate medical attention.

### Section 7 : PRECAUTIONS FOR SAFE HANDLING AND USE

**Leak / Spill:** Contain the spill.  
Recover uncontaminated material for re-use.  
Wear appropriate protective equipment.  
Contaminated material should be swept or shoveled into appropriate waste container for disposal.

**Waste disposal:** In accordance with municipal, provincial and federal regulations.

**Handling procedures and equipment:** Protect against physical damage.  
Avoid breathing dust.  
Wash thoroughly after handling.  
Keep out of reach of children.  
Avoid contact with skin, eyes and clothing.  
Launder contaminated clothing prior to reuse.

**Storage requirements:** Keep containers closed when not in use.  
Store away from strong acids or oxidizers.  
Store in a cool, dry and well ventilated area.

### Section 8 : CONTROL MEASURES

#### Precautionary Measures

**Gloves / Type:**



Neoprene or rubber gloves.

**Respiratory / Type:**



If exposure limit is exceeded, wear a NIOSH approved respirator.

**Eye / Type:**




Safety glasses with side-shields.

**Footwear / Type:** Safety shoes per local regulations.

**Clothing / Type:** As required to prevent skin contact.

**Other / Type:** Eye wash capability should be in close proximity.

**Ventilation requirements:** Local exhaust at points of emission.



|                     |   |
|---------------------|---|
| Health              | 2 |
| Fire                | 3 |
| Reactivity          | 0 |
| Personal Protection | G |

## Material Safety Data Sheet

### Hexanes MSDS

#### Section 1: Chemical Product and Company Identification

**Product Name:** Hexanes

**Catalog Codes:** SLH2335, SLH2032

**CAS#:** 110-54-3

**RTECS:** MN9275000

**TSCA:** TSCA 8(b) inventory: Hexane

**CI#:** Not applicable.

**Synonym:**

**Chemical Name:** Hexane

**Chemical Formula:** C<sub>6</sub>-H<sub>14</sub>

**Contact Information:**

**Sciencelab.com, Inc.**

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: [ScienceLab.com](http://ScienceLab.com)

**CHEMTREC (24HR Emergency Telephone), call:**

1-800-424-9300

**International CHEMTREC, call:** 1-703-527-3887

**For non-emergency assistance, call:** 1-281-441-4400

#### Section 2: Composition and Information on Ingredients

**Composition:**

| Name    | CAS #    | % by Weight |
|---------|----------|-------------|
| Hexanes | 110-54-3 | 98.5-99.9   |

**Toxicological Data on Ingredients:** Hexane: ORAL (LD50): Acute: 25000 mg/kg [Rat].

#### Section 3: Hazards Identification

**Potential Acute Health Effects:**

Hazardous in case of skin contact (permeator), of ingestion, of inhalation. Slightly hazardous in case of skin contact (irritant), of eye contact (irritant).

**Potential Chronic Health Effects:**

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Mutagenic for bacteria and/or yeast. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to peripheral nervous system, skin, central nervous system (CNS). Repeated or prolonged exposure to the substance can produce target organs damage.

#### Section 4: First Aid Measures

**Eye Contact:**



Check for and remove any contact lenses. Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Get medical attention if irritation occurs.

**Skin Contact:** Wash with soap and water. Cover the irritated skin with an emollient. Get medical attention if irritation develops.

**Serious Skin Contact:**

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek medical attention.

**Inhalation:**

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if symptoms appear.

**Serious Inhalation:**

Evacuate the victim to a safe area as soon as possible. Loosen tight clothing such as a collar, tie, belt or waistband. If breathing is difficult, administer oxygen. If the victim is not breathing, perform mouth-to-mouth resuscitation. Seek medical attention.

**Ingestion:**

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention if symptoms appear.

**Serious Ingestion:** Not available.

## Section 5: Fire and Explosion Data

**Flammability of the Product:** Flammable.

**Auto-Ignition Temperature:** 225°C (437°F)

**Flash Points:** CLOSED CUP: -22.5°C (-8.5°F). (TAG)

**Flammable Limits:** LOWER: 1.15% UPPER: 7.5%

**Products of Combustion:** These products are carbon oxides (CO, CO<sub>2</sub>).

**Fire Hazards in Presence of Various Substances:**

Highly flammable in presence of open flames and sparks, of heat. Non-flammable in presence of shocks.

**Explosion Hazards in Presence of Various Substances:**

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

**Fire Fighting Media and Instructions:**

Flammable liquid, insoluble in water. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray or fog.

**Special Remarks on Fire Hazards:**

Extremely flammable liquid and vapor. Vapor may cause flash fire.

**Special Remarks on Explosion Hazards:** Not available.

## Section 6: Accidental Release Measures

**Small Spill:** Absorb with an inert material and put the spilled material in an appropriate waste disposal.

**Large Spill:**

Flammable liquid, insoluble in water. Keep away from heat. Keep away from sources of ignition. Stop leak if without risk. Absorb with DRY earth, sand or other non-combustible material. Do not get water inside container. Do not touch spilled material. Prevent entry into sewers, basements or confined areas; dike if needed. Call for assistance on disposal. Be careful that the product is not present at a concentration level above TLV. Check TLV on the MSDS and with local authorities.

## Section 7: Handling and Storage

**Precautions:**

Keep locked up.. Keep away from heat. Keep away from sources of ignition. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/ vapor/spray. Avoid contact with skin. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidizing agents.

**Storage:**

Store in a segregated and approved area. Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame).

## Section 8: Exposure Controls/Personal Protection

**Engineering Controls:**

Provide exhaust ventilation or other engineering controls to keep the airborne concentrations of vapors below their respective threshold limit value. Ensure that eyewash stations and safety showers are proximal to the work-station location.

**Personal Protection:**

Safety glasses. Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Gloves (impervious).

**Personal Protection in Case of a Large Spill:**

Splash goggles. Full suit. Vapor respirator. Boots. Gloves. A self contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

**Exposure Limits:**

TWA: 500 (ppm) from OSHA (PEL) [United States] Inhalation TWA: 1800 (mg/m3) from OSHA (PEL) [United States] Inhalation TWA: 176 (mg/m3) from ACGIH (TLV) [United States] SKIN TWA: 50 (ppm) from ACGIH (TLV) [United States] SKIN TWA: 500 STEL: 1000 (ppm) from ACGIH (TLV) [United States] Inhalation TWA: 1760 STEL: 3500 (mg/m3) from ACGIH (TLV) [United States] Inhalation Consult local authorities for acceptable exposure limits.

## Section 9: Physical and Chemical Properties

**Physical state and appearance:** Liquid.

**Odor:** Gasoline-like or petroleum-like (Slight.)

**Taste:** Not available.

**Molecular Weight:** 86.18g/mole

**Color:** Clear Colorless.

**pH (1% soln/water):** Not applicable.

**Boiling Point:** 68°C (154.4°F)

**Melting Point:** -95°C (-139°F)

**Critical Temperature:** Not available.

**Specific Gravity:** 0.66 (Water = 1)

**Vapor Pressure:** 17.3 kPa (@ 20°C)

**Vapor Density:** 2.97 (Air = 1)

**Volatility:** Not available.

**Odor Threshold:** 130 ppm

**Water/Oil Dist. Coeff.:** The product is more soluble in oil; log(oil/water) = 3.9

**Ionicity (in Water):** Not available.

**Dispersion Properties:** See solubility in water, diethyl ether, acetone.

**Solubility:**

Soluble in diethyl ether, acetone. Insoluble in cold water, hot water.

## Section 10: Stability and Reactivity Data

**Stability:** The product is stable.

**Instability Temperature:** Not available.

**Conditions of Instability:** Heat, ignition sources, incompatibles.

**Incompatibility with various substances:** Reactive with oxidizing agents.

**Corrosivity:** Not available.

**Special Remarks on Reactivity:** Hexane can react vigorously with strong oxidizers (e.g. chlorine, bromine, fluorine)

**Special Remarks on Corrosivity:** Not available.

**Polymerization:** Will not occur.

## Section 11: Toxicological Information

**Routes of Entry:** Absorbed through skin. Dermal contact. Inhalation. Ingestion.

**Toxicity to Animals:**

WARNING: THE LC50 VALUES HEREUNDER ARE ESTIMATED ON THE BASIS OF A 4-HOUR EXPOSURE. Acute oral toxicity (LD50): 25000 mg/kg [Rat]. Acute toxicity of the gas (LC50): 48000 ppm 4 hours [Rat].

**Chronic Effects on Humans:**

MUTAGENIC EFFECTS: Mutagenic for bacteria and/or yeast. May cause damage to the following organs: peripheral nervous system, skin, central nervous system (CNS).

**Other Toxic Effects on Humans:**

Very hazardous in case of ingestion, of inhalation. Hazardous in case of skin contact (permeator). Slightly hazardous in case of skin contact (irritant).

**Special Remarks on Toxicity to Animals:** Not available.

**Special Remarks on Chronic Effects on Humans:**

May cause adverse reproductive effects based on animal data. May be tumorigenic based on animal data. May affect genetic material. Passes through the placental barrier in animal.

**Special Remarks on other Toxic Effects on Humans:**

Acute Potential Health Effects: Skin: May cause mild skin irritation. It can be absorbed through the skin in harmful amounts. Eyes: May cause mild eye irritation. Inhalation: May be harmful if inhaled. Inhalation of vapors may cause respiratory tract irritation. Overexposure may affect, brain, spinal cord, behavior/central and peripheral nervous systems (lightheadness, dizziness, hallucinations, paralysis, blurred vision, memory loss, headache, euphoria, general anesthetic, muscle weakness, numbness of the extremities, asphyxia, unconsciousness and possible death), metabolism, respiration, blood, cardiovascular system, gastrointestinal system (nausea) Ingestion: May be harmful if swallowed. May cause gastrointestinal tract irritation with abdominal pain and nausea. May also affect the liver, blood, brain, peripheral and central nervous systems. Symptoms of over exposure by ingestion are similar to that of overexposure by inhalation.

## Section 12: Ecological Information

**Ecotoxicity:** Not available.

**BOD5 and COD:** Not available.

**Products of Biodegradation:**

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

**Toxicity of the Products of Biodegradation:** The product itself and its products of degradation are not toxic.

**Special Remarks on the Products of Biodegradation:** Not available.

**Section 13: Disposal Considerations****Waste Disposal:**

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

**Section 14: Transport Information**

**DOT Classification:** CLASS 3: Flammable liquid.

**Identification:** : Hexane UNNA: 1208 PG: II

**Special Provisions for Transport:** Not available.

**Section 15: Other Regulatory Information****Federal and State Regulations:**

Connecticut hazardous material survey.: Hexanes Illinois toxic substances disclosure to employee act: Hexanes Illinois chemical safety act: Hexanes New York release reporting list: Hexanes Rhode Island RTK hazardous substances: Hexanes Pennsylvania RTK: Hexanes Florida: Hexanes Minnesota: Hexanes Massachusetts RTK: Hexanes Massachusetts spill list: Hexanes New Jersey: Hexanes New Jersey spill list: Hexanes Louisiana spill reporting: Hexanes TSCA 8(b) inventory: Hexanes SARA 313 toxic chemical notification and release reporting: Hexanes CERCLA: Hazardous substances.: Hexanes: 5000 lbs. (2268 kg)

**Other Regulations:**

OSHA: Hazardous by definition of Hazard Communication Standard (29 CFR 1910.1200). EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

**Other Classifications:****WHMIS (Canada):**

CLASS B-2: Flammable liquid with a flash point lower than 37.8°C (100°F). CLASS D-2B: Material causing other toxic effects (TOXIC).

**DSCL (EEC):**

R11- Highly flammable. R20- Harmful by inhalation. R38- Irritating to skin. R51/53- Toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment. R62- Possible risk of impaired fertility. R65- Harmful: may cause lung damage if swallowed. R67- Vapors may cause drowsiness or dizziness. S9- Keep container in a well-ventilated place. S16- Keep away from sources of ignition - No smoking. S29- Do not empty into drains. S33- Take precautionary measures against static discharges. S36/37- Wear suitable protective clothing and gloves. S61- Avoid release to the environment. Refer to special instructions/Safety data sheets. S62- If swallowed, do not induce vomiting: seek medical advice immediately and show this

**HMIS (U.S.A.):**

**Health Hazard:** 2

**Fire Hazard:** 3

**Reactivity:** 0

**Personal Protection:** g

**National Fire Protection Association (U.S.A.):**

**Health:** 1

**Flammability:** 3

**Reactivity:** 0

**Specific hazard:**

**Protective Equipment:**

Gloves (impervious). Lab coat. Vapor respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

## Section 16: Other Information

**References:** Not available.

**Other Special Considerations:** Not available.

**Created:** 10/10/2005 08:19 PM

**Last Updated:** 11/01/2010 12:00 PM

*The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.*



## Material Safety Data Sheet

### Isopropyl Alcohol, 50-100% v/v

#### Section 1 - Chemical Product and Company Identification

**MSDS Name:**

Isopropyl Alcohol, 50-100% v/v

**Catalog Numbers:**

LC15750, LC15755, LC15760

**Synonyms:**

Isopropanol, 2-propanol, sec-propanol

**Company Identification:**

LabChem Inc

200 William Pitt Way

Pittsburgh, PA 15238

**Company Phone Number:**

(412) 826-5230

**Emergency Phone Number:**

(800) 424-9300

**CHEMTREC Phone Number:**

(800) 424-9300

#### Section 2 – Composition, Information on Ingredients

| CAS#      | Chemical Name:    | Percent |
|-----------|-------------------|---------|
| 7732-18-5 | Water             | balance |
| 67-63-0   | Isopropyl alcohol | 50-100  |

#### Section 3 - Hazards Identification

##### Emergency Overview

**Appearance:** Clear, colorless solution**Danger!** Flammable liquid. May form explosive peroxides. May cause respiratory and digestive tract irritation. Causes eye irritation. May cause skin irritation. May cause central nervous system depression.**Target Organs:** Eyes, skin, respiratory system, central nervous system

##### Potential Health Effects

**Eye:**

Causes irritation, characterized by a burning sensation, redness, tearing, inflammation, and possible corneal injury.

**Skin:**

May cause irritation with pain and stinging, especially if the skin is abraded. Prolonged and/or repeated contact may cause defatting of the skin and dermatitis. In rare cases, exposure has caused skin sensitization.



## Material Safety Data Sheet

### Isopropyl Alcohol, 50-100% v/v

**Ingestion:**

May cause gastrointestinal irritation with nausea, vomiting and diarrhea. May cause kidney damage. May cause central nervous system depression, characterized by excitement, followed by headache, dizziness, drowsiness, and nausea. Advanced stages may cause collapse, unconsciousness, coma and possible death due to respiratory failure.

**Inhalation:**

Inhalation of high concentrations may cause central nervous system effects characterized by headache, dizziness, unconsciousness and coma. Inhalation of vapor may cause respiratory tract irritation.

**Chronic:**

Prolonged or repeated skin contact may cause defatting and dermatitis. May cause allergic skin reaction in some individuals.

## Section 4 - First Aid Measures

**Eyes:**

Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.

**Skin:**

Get medical aid. Flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash clothing before reuse.

**Ingestion:**

Give conscious victim 2-4 cupfuls of milk or water. Never give anything by mouth to an unconscious person. Get medical aid at once.

**Inhalation:**

Remove from exposure and move to fresh air immediately. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical aid at once.

**Notes to Physician:**

Treat symptomatically and supportively.

## Section 5 - Fire Fighting Measures

**General Information:**

As in any fire, wear a self-contained breathing apparatus in pressure-demand, MSHA/NIOSH (approved or equivalent), and full protective gear. Vapors can travel to a source of ignition and flash back. Use water spray to keep fire-exposed containers cool. Containers may explode in the heat of a fire. This chemical poses an explosion hazard. Flammable liquid. May form explosive peroxides. Vapors may be heavier than air. They can spread along the ground and collect in low or confined areas.

**Extinguishing Media:**

Use water spray to cool fire-exposed containers. Water may be ineffective. Do NOT use straight streams of water. For large fires, use dry chemical, carbon dioxide, alcohol-resistant foam, or water spray. For small fires, use carbon dioxide, dry chemical, dry sand, or alcohol-resistant foam. Cool containers with flooding quantities of water until well after fire is out.

**Autoignition Temperature:**

810°F (432°C)

**Flash Point:**

53°F (11.7°C) - for LC15750, 65°F (18°C) - for LC15755





## Material Safety Data Sheet Isopropyl Alcohol, 50-100% v/v

### NFPA Rating:

CAS# 7732-18-5: Health-0, Flammability-0, Instability-0

CAS# 67-63-0: Health-1, Flammability-3, Instability-0

### Explosion Limits:

Lower: 2.5%

Upper: 12.1%

## Section 6 - Accidental Release Measures

### General Information:

Use proper personal protective equipment as indicated in Section 8.

### Spills/Leaks:

Remove all sources of ignition. Absorb spills with absorbent (vermiculite, sand, fuller's earth) and place in plastic bags for later disposal.

## Section 7 - Handling and Storage

### Handling:

Wash thoroughly after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation. Ground and bond containers when transferring material. Avoid contact with eyes, skin, and clothing. Empty containers retain product residue, (liquid and/or vapor), and can be dangerous. Keep container tightly closed. Avoid contact with heat, sparks and flame. Avoid ingestion and inhalation. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose empty containers to heat, sparks or open flames.

### Storage:

Keep away from heat, sparks, and flame. Keep away from sources of ignition. Store in a tightly closed container. Keep from contact with oxidizing materials. Store in a cool, dry, well-ventilated area away from incompatible substances.

## Section 8 - Exposure Controls, Personal Protection

### Engineering Controls:

Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Use adequate ventilation to keep airborne concentrations below the permissible exposure limits.

### Exposure Limits:

| Chemical Name:    | ACGIH                        | NIOSH                                                    | OSHA                                      |
|-------------------|------------------------------|----------------------------------------------------------|-------------------------------------------|
| Water             | none listed                  | none listed                                              | none listed                               |
| Isopropyl alcohol | 200 ppm TWA;<br>400 ppm STEL | 400 ppm TWA; 980 mg/m <sup>3</sup><br>TWA; 2000 ppm IDLH | 400 ppm TWA;<br>980 mg/m <sup>3</sup> TWA |

### OSHA Vacated PELs:

Isopropyl alcohol: 400 ppm TWA, 980 mg/m<sup>3</sup> TWA

### Personal Protective Equipment

#### Eyes:

Wear appropriate protective eyeglasses or chemical safety goggles as described by OSHA's eye and face protection regulations in 29 CFR 1910.133 or European Standard EN166.



## Material Safety Data Sheet

### Isopropyl Alcohol, 50-100% v/v

**Skin:**

Wear appropriate gloves to prevent skin exposure.

**Clothing:**

Wear appropriate protective clothing to prevent skin exposure.

**Respirators:**

Follow the OSHA respirator regulations found in 29 CFR 1910.134 or European Standard EN 149. Use a NIOSH/MSHA or European Standard EN 149 approved respirator if exposure limits are exceeded or if irritation or other symptoms are experienced.

## Section 9 - Physical and Chemical Properties

|                                   |                                 |
|-----------------------------------|---------------------------------|
| <b>Physical State:</b>            | Liquid                          |
| <b>Color:</b>                     | Colorless                       |
| <b>Odor:</b>                      | Solvent odor                    |
| <b>pH:</b>                        | No information found.           |
| <b>Vapor Pressure:</b>            | 33 mm Hg @ 20°C                 |
| <b>Vapor Density:</b>             | 2.1 (air=1)                     |
| <b>Evaporation Rate:</b>          | 2.3 (n-butyl acetate=1)         |
| <b>Viscosity:</b>                 | 2.1 cP at 77°F                  |
| <b>Boiling Point:</b>             | 82°C (180°F)                    |
| <b>Freezing/Melting Point:</b>    | -90°C (-130°F)                  |
| <b>Decomposition Temperature:</b> | No information found.           |
| <b>Solubility in water:</b>       | Miscible                        |
| <b>Specific Gravity/Density:</b>  | 0.78 – 0.92                     |
| <b>Molecular Formula:</b>         | C <sub>3</sub> H <sub>8</sub> O |
| <b>Molecular Weight:</b>          | 60.0554                         |

## Section 10 - Stability and Reactivity

**Chemical Stability:**

Under normal storage conditions, peroxidizable compounds can form and accumulate peroxides, which may explode when subjected to heat or shock.

**Conditions to Avoid:**

Incompatible materials, light, ignition sources.

**Incompatibilities with Other Materials:**

Strong oxidizers, strong acids, strong bases, amines, ammonia, chlorine, rubber, aluminum.

**Hazardous Decomposition Products:**

Carbon monoxide, carbon dioxide.

**Hazardous Polymerization:**

Has not been reported.

## Section 11 - Toxicological Information

**RTECS:**

CAS# 7732-18-5: ZC0110000.

CAS# 67-63-0: NT8050000.



## Material Safety Data Sheet Isopropyl Alcohol, 50-100% v/v

### LD50/LC50:

CAS# 7732-18-5:

Oral, rat: LD50 = >90 mL/kg.

CAS# 67-63-0:

Oral, mouse: LD50 = 3600 mg/kg

Oral, rabbit: LD50 = 6410 mg/kg

Oral, rat: LD50 = 5000 mg/kg

Skin, rabbit: LD50 = 12800 mg/kg,

Inhalation, rat: LC50 = 16000 ppm/8H.

### Carcinogenicity:

CAS# 7732-18-5: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.

CAS# 67-63-0: Not listed as a carcinogen by ACGIH, IARC, NIOSH, NTP, OSHA, or CA Prop 65.

### Epidemiology:

No information found

### Teratogenicity:

Studies have found no teratogenic effects in rats or rabbits.

### Reproductive:

See actual entry in RTECS for complete information.

### Mutagenicity:

See actual entry in RTECS for complete information.

### Neurotoxicity:

In rats exposed to concentrations of 1500 ppm or more, neurotoxicity was minimal, and the animals recovered within five hours.

## Section 12 - Ecological Information

### Ecotoxicity:

Acute aquatic effects: Fathead minnow: LC50 = 1000 mg/L/96 Hr. Golden orfe: LC50 = 8970 mg/L/48 Hr. Goldfish: LC50 = GT5000 mg/L/24 Hr.

### Environmental:

This chemical has a low potential to affect aquatic organisms, secondary waste treatment microorganisms, and the germination and growth of some plants. It is readily biodegradable and is not expected to persist in an aquatic environment. It is not likely to bioconcentrate.

## Section 13 - Disposal Considerations

Dispose of in accordance with Federal, State, and local regulations.

## Section 14 - Transport Information

### US DOT

Shipping Name: Isopropanol

Hazard Class: 3

UN Number: UN1219

Packing Group: PG II



## Material Safety Data Sheet Isopropyl Alcohol, 50-100% v/v

### Section 15 - Regulatory Information

#### US Federal

##### TSCA:

CAS# 7732-18-5 is listed on the TSCA Inventory.

CAS# 67-63-0 is listed on the TSCA Inventory.

##### SARA Reportable Quantities (RQ):

None of the components are on this list.

##### CERCLA/SARA Section 313:

This material contains Isopropyl alcohol (CAS# 67-63-0, 50-100%), which is subject to the reporting requirements of Section 313 of SARA Title III and 40 CFR Part 373.

##### OSHA - Highly Hazardous:

None of the chemicals in this product are considered highly hazardous by OSHA.

#### US State

##### State Right to Know:

Isopropyl alcohol can be found on the following state Right-to-Know lists: California, New Jersey, Florida, Pennsylvania, Minnesota, Massachusetts.

##### California Regulations:

None.

#### European/International Regulations

##### Canadian DSL/NDL:

CAS# 7732-18-5 is listed on Canada's DSL List.

CAS# 67-63-0 is listed on Canada's DSL List.

##### Canada Ingredient Disclosure List:

CAS# 7732-18-5 is not listed on Canada's Ingredient Disclosure List.

CAS# 67-63-0 is listed on Canada's Ingredient Disclosure List.

### Section 16 - Other Information

MSDS Creation Date: October 28, 1997

Revision Date: October 12, 2009

*Information in this MSDS is from available published sources and is believed to be accurate. No warranty, express or implied, is made and LabChem Inc. assumes no liability resulting from the use of this MSDS. The user must determine suitability of this information for his application.*



## **MATERIAL SAFETY DATA SHEET**

### **(POLYCHLORINATED BIPHENYLS)**

#### **COMPOSITION/INFORMATION ON INGREDIENTS**

Ingredients Name: polychlorinated biphenyls (PCBs)

#### **HAZARD IDENTIFICATION**

Reports of Carcinogenicity: YES

#### **HEALTH HAZARDS ACUTE AND CHRONIC**

- **Eyes**: Moderately irritating to eye tissues.
- **Skin**: Can be absorbed through intact skin, may cause de-fatting, potential for chloracne.
- **Inhalation**: Possible liver injury.
- **Ingestion**: Slightly toxic; reasonably anticipated to be carcinogenic.

#### **EFFECTS OF OVER-EXPOSURE**

Can cause dermatological symptoms; however, these are reversible upon removal of exposure source.

#### **FIRST AID MEASURES**

- **Eyes**: Irrigate immediately with copious quantities of running water for at least 15 minutes if liquid or solid PCBs get into them.
- **Skin**: Contaminated clothing should be removed and the skin washed thoroughly with soap and water. Hot PCBs may cause thermal burns.
- **Inhalation**: Remove to fresh air; if skin rash or respiratory irritation persists, consult a physician (if electrical equipment arcs over, PCBs may decompose to produce hydrochloric acid).
- **Ingestion**: Consult a physician. Do not induce vomiting or give any oily laxatives. (If large amounts are ingested, gastric lavage is suggested).

**FIRE FIGHTING MEASURES**: Flash Point: >141 °C (285.8 °F)

**EXTINGUISHING MEDIA**: PCBs are fire-resistant compounds.


## **FIRE-FIGHTING PROCEDURES**

Standard fire-fighting wearing apparel and self-contained breathing apparatus should be worn when fighting fires that involve possible exposure to chemical combustion products. Fire fighting equipment should be thoroughly cleaned and decontaminated after use.


## **UNUSUAL FIRE/EXPLOSION HAZARD**

If a PCB transformer is involved in a fire-related incident, the owner of the transformer is required to report the incident. Consult and follow appropriate federal, provincial and local regulations.

***Note:*** When askarel liquid becomes involved in a fire, toxic by-products of combustion are typically produced including polychlorinated dibenzofurans and polychlorinated dibenzodioxins, both known carcinogens. The structures of these chemical species are as follows:

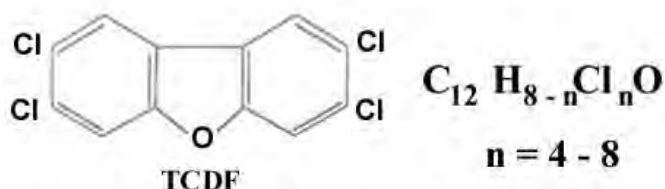

**2,3,7,8-tetrachlorodibenzofuran**

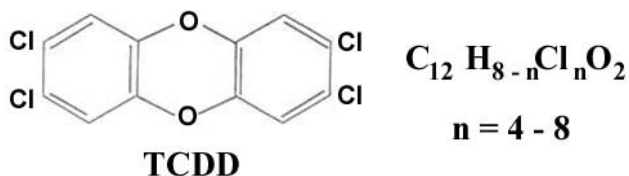

**2,3,7,8-tetrachloro-dibenzo-p-dioxin**

***Note:*** 2,3,7,8-tetrachloro-dibenzo-p-dioxin is one of the most potent teratogenic, mutagenic and carcinogenic agents known to man.

## **SPILL RELEASE PROCEDURES**

Cleanup & disposal of liquid PCBs are strictly regulated by the federal government. Ventilate area. Contain spill/leak. Remove spill by means of absorptive material. Spill clean-up personnel should use proper protective clothing. All wastes and residues containing PCBs should be collected, containerized, marked and disposed of in the manner prescribed by applicable federal, provincial and local laws.

## **HANDLING AND STORAGE PRECAUTIONS**

Care should be taken to prevent entry into the environment through spills, leakage, use, vaporization, or disposal of liquid. Avoid prolonged breathing of vapours or mists. Avoid contact with eyes or prolonged contact with skin. Comply with all federal, provincial and local regulations.

## **OTHER PRECAUTIONS**

Federal regulations require PCBs, PCB items, storage areas, transformer vaults, and transport vehicles to be appropriately labelled.

## **RESPIRATORY PROTECTION**

Use OSHA approved equipment when airborne exposure limits are exceeded. Full facepiece equipment is recommended and, if used, replaces need for face shield and/or chemical splash goggles. The respirator use limitations specified by the manufacturer must be observed.

## **VENTILATION**

Provide natural or mechanical ventilation to control exposure levels below airborne exposure levels.

**PROTECTIVE GLOVES:** Wear appropriate chemical resistant gloves to prevent skin contact.

**EYE PROTECTION:** Wear chemical splash goggles and have eye baths available.

## **OTHER PROTECTIVE EQUIPMENT**

Wear appropriate protective clothing. Provide a safety shower at any location where skin contact can occur.

## **WORK HYGIENIC PRACTICES**

Wash thoroughly after handling. Supplemental safety and health : none

## **PHYSICAL/CHEMICAL PROPERTIES**

- **Vapour pressure:** (mm Hg @100 °F) 0.005 - 0.00006
- **Viscosity:** (CENTISTOKES) 3.6 - 540
- **Stability indicator/materials to avoid:** Yes
- **Stability Condition to Avoid:** PCBs are very stable, fire-resistant compounds.

## **HAZARDOUS DECOMPOSITION PRODUCTS**

Carbon monoxide, carbon dioxide, hydrogen chloride, phenolics, aldehydes, furans, dioxins

## **WASTE DISPOSAL METHODS**

Consult the applicable PCB regulations prior to any disposal of PCBs or PCB-contaminated items.

---

## Appendix G: Detailed Cost Estimate

---



**Project No.: 20231130**  
**Project Name: 100 River Partial CAP Amendment**  
**Detailed Cost Estimate**

| Task Number/Name                                                                            |                                                                              | Description           | Unit Rate     | Unit      | Units      | Amount               | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------|---------------|-----------|------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1 - Project Management &amp; Coordination</b>                                            |                                                                              |                       |               |           |            | <b>\$ 18,159.60</b>  | Conduct routine project management including tracking, invoicing, staffing, and meetings/communication with project stakeholders. Assumes project duration of 2 years. Provide project loan assistance and compliance if needed. Provide HASP update and draft SSQAPP for confirmation sampling.                                                                                                                                         |
| <b>Professional Services</b>                                                                |                                                                              |                       |               |           | <b>110</b> | <b>\$ 18,159.60</b>  |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Scientist                                                                    | Senior Professional 1 | \$ 174.00     | Hours     | 40         | \$ 6,960.00          | PM Tasks                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                                                                                             | Scientist                                                                    | Staff Professional 2  | \$ 117.42     | Hours     | 4          | \$ 469.68            | Draft HASP updates                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                                                                             | Engineer                                                                     | Senior Professional 1 | \$ 182.00     | Hours     | 2          | \$ 364.00            | Review HASP                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                                                                                             | Scientist                                                                    | Senior Professional 1 | \$ 179.22     | Hours     | 12         | \$ 2,150.64          | Support communication/meeting with stakeholders-planner                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                                             | Scientist                                                                    | Senior Professional 1 | \$ 179.22     | Hours     | 16         | \$ 2,867.52          | Manage Davis Bacon and BABA Compliance, if needed-planner                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                             | Engineer                                                                     | Senior Professional 1 | \$ 187.46     | Hours     | 8          | \$ 1,499.68          | Support Davis Bacon and BABA Compliance, if needed                                                                                                                                                                                                                                                                                                                                                                                       |
|                                                                                             | Scientist                                                                    | Staff Professional 2  | \$ 117.42     | Hours     | 20         | \$ 2,348.40          | Draft SSQAPP or work plan for initial compliance sampling                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                             | Engineer                                                                     | Senior Professional 1 | \$ 187.46     | Hours     | 8          | \$ 1,499.68          | Review SSQAPP                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Subcontractors/Consultants</b>                                                           |                                                                              |                       |               |           | <b>0</b>   | <b>\$ -</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>External Expenses</b>                                                                    |                                                                              |                       |               |           | <b>0</b>   | <b>\$ -</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Internal Expenses</b>                                                                    |                                                                              |                       |               |           | <b>0</b>   | <b>\$ -</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>2 - CAP Implementation - Concrete &amp; Epoxy Paint</b>                                  |                                                                              |                       |               |           |            | <b>\$ 886,960.10</b> | Provide QEP oversight of contractors to complete remaining partial CAP tasks related to PCBs in building materials including:<br>1. Cleaning walls and applying epoxy paint or vapor barrier and gypsum board wall<br>2. Installing poly sheeting and 4-inch concrete slab in select areas<br>Assumes Contractor procurement and management will be conducted by the property owner. Assumes disposal of liquid and solids as PCB waste. |
| <b>Professional Services</b>                                                                |                                                                              |                       |               |           | <b>50</b>  | <b>\$ 6,807.60</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Scientist                                                                    | Senior Professional 1 | \$ 174.00     | Hours     | 10         | \$ 1,740.00          | Task management and coordination of site visits                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Scientist                                                                    | Staff Professional 3  | \$ 126.69     | Hours     | 40         | \$ 5,067.60          | Provide QEP oversight of construction activities. Assumes up to 5 visits (kickoff, confirm wall cleaning, epoxy paint install, poly sheeting install, final concrete slab). 8hr per visit drive time + on-site time.                                                                                                                                                                                                                     |
| <b>Subcontractors/Consultants</b>                                                           |                                                                              |                       |               |           | <b>8</b>   | <b>\$ 879,180.00</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Concrete capping slab and VB                                                 |                       | \$ 275,000.00 | Est       | 1          | \$ 275,000.00        | Contractor estimate - Contract held by client                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                             | Wall cleaning, epoxy paint and/or gypsum and VB barrier - labor              |                       | \$ 150,000.00 | Est       | 1          | \$ 150,000.00        | Contractor estimate - Contract held by client                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                             | Wall cleaning, epoxy paint and/or gypsum and VB barrier - material/equipment |                       | \$ 450,000.00 | Est       | 1          | \$ 450,000.00        | Contractor estimate - Contract held by client                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                             | Waste Transport + manifest + fee                                             |                       | \$ 1,000.00   | est       | 1          | \$ 1,100.00          | Contractor estimate                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                             | Waste Disposal - as PCB remediation waste                                    |                       | \$ 700.00     | drum      | 4          | \$ 3,080.00          | Contractor estimate                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>External Expenses</b>                                                                    |                                                                              |                       |               |           | <b>0</b>   | <b>\$ -</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Internal Expenses</b>                                                                    |                                                                              |                       |               |           | <b>885</b> | <b>\$ 972.50</b>     |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | PPE                                                                          |                       | \$ 22.00      | Day/Staff | 5          | \$ 110.00            | 5 days                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                                                             | Samsung Field Tablet                                                         |                       | \$ 50.00      | Day       | 5          | \$ 250.00            | 5 days                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                                                             | Stone Vehicle Mileage                                                        |                       | \$ 0.70       | Mile      | 875        | \$ 612.50            | 5 days                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>3 - CAP Implementation - CAP Implementation - NLD Elevator, NLD Well, and T2 Closure</b> |                                                                              |                       |               |           |            | <b>\$ 183,244.08</b> | VT licensed well driller to oversee pump components removal and well abandonment. Construction contractor to close NLD elevator and T2 room and abandon T2 underground vault according to the CAP. Characterization and disposal of oil as PCB waste and displaced water as non-haz waste.                                                                                                                                               |
| <b>Professional Services</b>                                                                |                                                                              |                       |               |           | <b>40</b>  | <b>\$ 5,446.08</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Scientist                                                                    | Senior Professional 1 | \$ 174.00     | Hours     | 8          | \$ 1,392.00          | Task management and coordination of site visits                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Scientist                                                                    | Staff Professional 3  | \$ 126.69     | Hours     | 32         | \$ 4,054.08          | QEP oversight of work. Assumes 4 site visits (well abandonment, hydraulic oil removal, T2 vault abandonment, post elevator and T2 room closure)                                                                                                                                                                                                                                                                                          |
| <b>Subcontractors/Consultants</b>                                                           |                                                                              |                       |               |           | <b>26</b>  | <b>\$ 177,020.00</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Well Driller                                                                 |                       | \$ 18,000.00  | Est       | 1          | \$ 18,000.00         | Contractor estimate - Contract held by client                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                             | Construction Contractor                                                      |                       | \$ 150,000.00 | Est       | 1          | \$ 150,000.00        | Contractor estimate - Contract held by client                                                                                                                                                                                                                                                                                                                                                                                            |
|                                                                                             | Lab Analysis - waste characterization                                        |                       | \$ 750.00     | ea        | 2          | \$ 1,650.00          |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | Waste Transport + manifest + fee                                             |                       | \$ 1,000.00   | ea        | 1          | \$ 1,100.00          | Contractor estimate                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                             | Waste Disposal - as PCB remediation waste                                    |                       | \$ 700.00     | Drum      | 1          | \$ 770.00            | Contractor estimate                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                             | Waste Disposal - as non-haz water                                            |                       | \$ 250.00     | Drum      | 20         | \$ 5,500.00          | Contractor estimate-Assumes tank is full                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>External Expenses</b>                                                                    |                                                                              |                       |               |           | <b>0</b>   | <b>\$ -</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Internal Expenses</b>                                                                    |                                                                              |                       |               |           | <b>708</b> | <b>\$ 778.00</b>     |                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                             | PPE                                                                          |                       | \$ 22.00      | Day/Staff | 4          | \$ 88.00             | 4 days                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                                                             | Samsung Field Tablet                                                         |                       | \$ 50.00      | Day       | 4          | \$ 200.00            | 4 days                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                                                             | Stone Vehicle Mileage                                                        |                       | \$ 0.70       | Mile      | 700        | \$ 490.00            | 4 days                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Project No.: 20231130**  
**Project Name: 100 River Partial CAP Amendment**  
**Detailed Cost Estimate**

|                                                                 |                                                |                        |           |           |     |             |                        |                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------|------------------------------------------------|------------------------|-----------|-----------|-----|-------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>4 - CAP Implementation - Initial Post Abatement Sampling</b> |                                                |                        |           |           |     |             | <b>\$ 11,065.14</b>    | Provide initial post abatement sampling for all rooms with new barriers.<br>- Annual Inspection of interior and exterior barriers (asphalt, concrete, paint)<br>- 5 TO10 samples for PCBs + 3 QC (24-hour)<br>Assumes 2 staff for 2 days                                                                                                                                       |
| <b>Professional Services</b>                                    |                                                |                        |           |           |     | <b>58</b>   | <b>\$ 7,951.04</b>     |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Scientist                                      | Senior Professional 3  | \$ 214.24 | Hours     | 2   | \$ 428.48   |                        | Sr technical support                                                                                                                                                                                                                                                                                                                                                           |
|                                                                 | Scientist                                      | Senior Professional 1  | \$ 174.00 | Hours     | 8   | \$ 1,392.00 |                        | Task coordination; kick-off meeting; respond to field questions                                                                                                                                                                                                                                                                                                                |
|                                                                 | Scientist                                      | Project Professional 1 | \$ 138.02 | Hours     | 24  | \$ 3,312.48 |                        | 2 field days (7hr on-site + 3 hr RT per event) + 1 hr kick-off + 3 hr mob and demob                                                                                                                                                                                                                                                                                            |
|                                                                 | Scientist                                      | Staff Professional 2   | \$ 117.42 | Hours     | 24  | \$ 2,818.08 |                        | 2 field days (7hr on-site + 3 hr RT per event) + 1 hr kick-off + 3 hr mob and demob                                                                                                                                                                                                                                                                                            |
| <b>Subcontractors/Consultants</b>                               |                                                |                        |           |           |     | <b>21</b>   | <b>\$ 2,128.50</b>     |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Lab TO10                                       |                        | \$ 120.00 | ea        | 8   | \$ 1,056.00 |                        | 5 samples + Dup + Ambient + Field Blank                                                                                                                                                                                                                                                                                                                                        |
|                                                                 | Lab 8082 Wipes                                 |                        | \$ 75.00  | ea        | 13  | \$ 1,072.50 |                        | 11 samples + DUP + EB                                                                                                                                                                                                                                                                                                                                                          |
| <b>External Expenses</b>                                        |                                                |                        |           |           |     | <b>1</b>    | <b>\$ 110.00</b>       |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Field Supplies & Equipment                     |                        | \$ 100.00 | Each      | 1   | \$ 110.00   |                        | Field Consumables                                                                                                                                                                                                                                                                                                                                                              |
| <b>Internal Expenses</b>                                        |                                                |                        |           |           |     | <b>381</b>  | <b>\$ 875.60</b>       |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Extech Temp Humidity Barometric Pressure Gauge |                        | \$ 10.00  | Day       | 1   | \$ 10.00    |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | Tygon .375 inch OD, .25 inch ID                |                        | \$ 5.80   | Feet      | 12  | \$ 69.60    |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | SKC Chek Mate Calibrator                       |                        | \$ 25.00  | Day       | 1   | \$ 25.00    |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | SKC Airchek 52                                 |                        | \$ 30.00  | Day       | 12  | \$ 360.00   |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | Samsung Field Tablet                           |                        | \$ 50.00  | Day       | 2   | \$ 100.00   |                        |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Stone Vehicle Mileage                          |                        | \$ 0.70   | Mile      | 350 | \$ 245.00   |                        |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | PPE                                            |                        | \$ 22.00  | Day/Staff | 3   | \$ 66.00    |                        |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 |                                                |                        |           |           |     |             |                        |                                                                                                                                                                                                                                                                                                                                                                                |
| <b>5 - Partial CACCR and MMIP Update</b>                        |                                                |                        |           |           |     |             | <b>\$ 10,246.44</b>    | Draft rule compliant partial CACCR to record construction activities and monitoring results; update 2018 MMIP to reflect new construction activities                                                                                                                                                                                                                           |
| <b>Professional Services</b>                                    |                                                |                        |           |           |     | <b>64</b>   | <b>\$ 10,246.44</b>    |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Scientist                                      | Senior Professional 3  | \$ 214.24 | Hours     | 4   | \$ 856.96   |                        | Sr review - Partial CACCR                                                                                                                                                                                                                                                                                                                                                      |
|                                                                 | Scientist                                      | Senior Professional 1  | \$ 179.22 | Hours     | 8   | \$ 1,433.76 |                        | Peer review - Partial CACCR                                                                                                                                                                                                                                                                                                                                                    |
|                                                                 | Engineer                                       | Project Professional 2 | \$ 157.59 | Hours     | 24  | \$ 3,782.16 |                        | Draft partial CACCR                                                                                                                                                                                                                                                                                                                                                            |
|                                                                 | Scientist                                      | Project Professional 1 | \$ 138.02 | Hours     | 4   | \$ 552.08   |                        | Update CAD figures                                                                                                                                                                                                                                                                                                                                                             |
|                                                                 | Scientist                                      | Staff Professional 2   | \$ 117.42 | Hours     | 8   | \$ 939.36   |                        | Update report attachments, GIS figures, tables                                                                                                                                                                                                                                                                                                                                 |
|                                                                 | Scientist                                      | Senior Professional 3  | \$ 214.24 | Hours     | 2   | \$ 428.48   |                        | Sr Review - MMIP update                                                                                                                                                                                                                                                                                                                                                        |
|                                                                 | Scientist                                      | Senior Professional 1  | \$ 179.22 | Hours     | 4   | \$ 716.88   |                        | Peer review - MMIP update                                                                                                                                                                                                                                                                                                                                                      |
|                                                                 | Engineer                                       | Project Professional 2 | \$ 157.59 | Hours     | 8   | \$ 1,260.72 |                        | MMIP text update                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | Scientist                                      | Project Professional 1 | \$ 138.02 | Hours     | 2   | \$ 276.04   |                        | Update figures for MMIP                                                                                                                                                                                                                                                                                                                                                        |
|                                                                 | Scientist                                      |                        |           |           |     | \$ -        |                        |                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Subcontractors/Consultants</b>                               |                                                |                        |           |           |     | <b>0</b>    | <b>\$ -</b>            |                                                                                                                                                                                                                                                                                                                                                                                |
| <b>External Expenses</b>                                        |                                                |                        |           |           |     | <b>0</b>    | <b>\$ -</b>            |                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Internal Expenses</b>                                        |                                                |                        |           |           |     | <b>0</b>    | <b>\$ -</b>            |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 |                                                |                        |           |           |     |             |                        |                                                                                                                                                                                                                                                                                                                                                                                |
| <b>6 - Annual Monitoring (PCB in Bldg Materials) - 1year</b>    |                                                |                        |           |           |     |             | <b>\$ 10,105.19</b>    | Provide monitoring and maintenance inspection of all barriers in accordance with the MMIP following completion of corrective actions and initial post-abatement sampling.<br>First year monitoring.<br>- Annual Inspection of interior and exterior barriers (asphalt, concrete, paint)<br>- Assumes 10 TO10 samples for PCBs + 3 QC (24-hour)<br>Assumes 2 staff for 1.5 days |
| <b>Professional Services</b>                                    |                                                |                        |           |           |     | <b>50</b>   | <b>\$ 7,381.59</b>     |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Scientist                                      | Senior Professional 3  | \$ 214.24 | Hours     | 4   | \$ 856.96   |                        | Sr technical support                                                                                                                                                                                                                                                                                                                                                           |
|                                                                 | Engineer                                       | Senior Professional 1  | \$ 182.00 | Hours     | 8   | \$ 1,456.00 |                        | Task coordination; kick-off meeting; respond to field questions                                                                                                                                                                                                                                                                                                                |
|                                                                 | Scientist                                      | Project Professional 2 | \$ 149.35 | Hours     | 19  | \$ 2,837.65 |                        | 1.5 field days (7hr on-site + 3 hr RT per event) + 1 hr kick-off + 3 hr mob and demob                                                                                                                                                                                                                                                                                          |
|                                                                 | Scientist                                      | Staff Professional 2   | \$ 117.42 | Hours     | 19  | \$ 2,230.98 |                        | 1.5 field days (7hr on-site + 3 hr RT per event) + 1 hr kick-off + 3 hr mob and demob                                                                                                                                                                                                                                                                                          |
|                                                                 | Scientist                                      |                        |           |           |     | \$ -        |                        |                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Subcontractors/Consultants</b>                               |                                                |                        |           |           |     | <b>13</b>   | <b>\$ 1,716.00</b>     |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Lab - TO10A                                    |                        | \$ 120.00 | ea        | 13  | \$ 1,716.00 |                        | 10 samples + Dup + ambient + field blank                                                                                                                                                                                                                                                                                                                                       |
| <b>External Expenses</b>                                        |                                                |                        |           |           |     | <b>1</b>    | <b>\$ 110.00</b>       |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Field Supplies & Equipment                     |                        | \$ 100.00 | Each      | 1   | \$ 110.00   |                        | Field Consumables                                                                                                                                                                                                                                                                                                                                                              |
| <b>Internal Expenses</b>                                        |                                                |                        |           |           |     | <b>382</b>  | <b>\$ 897.60</b>       |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Extech Temp Humidity Barometric Pressure Gauge |                        | \$ 10.00  | Day       | 1   | \$ 10.00    |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | Tygon .375 inch OD, .25 inch ID                |                        | \$ 5.80   | Feet      | 12  | \$ 69.60    |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | SKC Chek Mate Calibrator                       |                        | \$ 25.00  | Day       | 1   | \$ 25.00    |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | SKC Airchek 52                                 |                        | \$ 30.00  | Day       | 12  | \$ 360.00   |                        | PUF Air Sampling                                                                                                                                                                                                                                                                                                                                                               |
|                                                                 | Samsung Field Tablet                           |                        | \$ 50.00  | Day       | 2   | \$ 100.00   |                        |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | Stone Vehicle Mileage                          |                        | \$ 0.70   | Mile      | 350 | \$ 245.00   |                        |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 | PPE                                            |                        | \$ 22.00  | Day/Staff | 4   | \$ 88.00    |                        |                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                 |                                                |                        |           |           |     |             |                        |                                                                                                                                                                                                                                                                                                                                                                                |
| <b>GRAND TOTAL</b>                                              |                                                |                        |           |           |     |             | <b>\$ 1,119,780.55</b> |                                                                                                                                                                                                                                                                                                                                                                                |